

# POTAIN®

## TOWER CRANE RANGE

Pocket guide  
ASME B30.5  
Imperial/Metric


INDUSTRY LEADER IN SELF-ERECTING AND TOP-SLEWING CRANES



## POTAIN CRANE RANGE

### Self-Erecting Cranes

Model	Capacity	Tip Capacity	Max Radius	Height Under Hook
<b>Igo M &amp; Hup M</b>				
Igo MA 21	2.0 USt (1,8 t)	85 ft / 0.8 USt (26 m / 0,7 t)	85 ft (26 m)	63 ft (19,3 m)
Hup M 28-22	2.4 USt (2,2 t)	91 ft / 0.95 USt (28 m / 0,85 t)	91 ft (28 m)	64.3 ft (19,6 m)
<b>Hup</b>				
Hup 32-27	4.4 USt (4,0 t)	105 ft / 1.1 USt (32 m / 1 t)	105 ft (32 m)	83 ft / 98 ft (25,2 m / 27 m)
Hup 40-30	4.4 USt (4,0 t)	131 ft / 1.1 USt (40 m / 1 t)	131 ft (40 m)	94 ft / 105 ft (28,5 m / 32 m)
<b>Igo T</b>				
Igo T 85 A	6.6 USt (6,0 t)	147.6 ft / 1.5 USt (45 m / 1,4 t)	147.6 ft (45 m)	124.7 ft (38 m)
Igo T 99	6.6 USt (6,0 t)	157.5 ft / 1.32 USt (48 m / 1,2 t)	157.5 ft (48 m)	126.3 ft (38,5 m)
Igo T 130	8.8 USt (8,0 t)	164 ft / 1.5 USt (50 m / 1,4 t)	164 ft (50 m)	122.4 ft (37,3 m)
<b>Evy</b>				
Evy 30-23 2.2 t	2.4 USt (2,2 t)	98.4 ft / 1.1 USt (30 m / 1 t)	98.4 ft (30 m)	75.1 ft (22,9 m)
Evy 30-23 4 t	4.4 USt (4,0 t)	98.4 ft / 1.1 USt (30 m / 1 t)	98.4 ft (30 m)	75.1 ft (22,9 m)

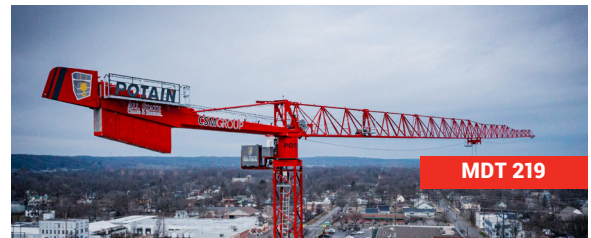

## The Manitowoc Company, Inc.

### Regional headquarters

#### Americas

Milwaukee, Wisconsin, USA  
Tel: +1 414 760 4600

Shady Grove, Pennsylvania, USA  
Tel: +1 717 597 8121

#### Europe and Africa

Dardilly, France – TOWERS  
Tel: +33 (0) 4 72 18 20 20

Wilhelmshaven, Germany – MOBILE  
Tel: +49 (0) 4421 294 0

#### APAC

Shanghai, China  
Tel: +86 21 6457 0066

#### Singapore


Tel: +65 6264 1188

#### Middle East and India

Dubai, UAE  
Tel: +971 4 8862677

This document is non-contractual. Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment.

© 2024 The Manitowoc Company, Inc.  
Potain Full Range • 0424-PGR-US



manitowoc.com

# POTAIN CRANE RANGE

## Top-Slewing Cranes

Model	Capacity	Tip Capacity	Max Radius
<b>Topless CCS City</b>			
MCT 68	2.8 USt - 3.3 USt (2,5 t - 3 t)	151 ft / 1.2 USt ( 46 m / 1,1 t)	151 ft (46 m)
MCT 88	3.3 USt - 5.5 USt (3 t - 5 t)	171 ft / 1.2 - 1.3 USt (52 m / 1,1 - 1,15 t)	171 ft (52 m)
MDT 109	6.6 USt (6 t)	180 ft / 1.5 USt (55 m / 1,35 t)	180 ft (55 m)
MDT 139	6.6 USt (6 t)	180 ft / 2.1 USt (55 m / 1,9 t)	180 ft (55 m)
MDT 159	6.6 USt (6 t)	201 ft / 1.95 USt (60 m / 1,75 t)	201 ft (60 m)
MDT 189	8.8 USt (8 t)	197 ft / 2.0 USt (60 m / 1,8 t)	197 ft (60 m)
MDT 219 J8	8.8 USt (8 t)	213 ft / 2.15 USt (65 m / 1,95 t)	213 ft (65 m)
MDT 219 J10	11.0 USt (10 t)	213 ft / 2.05 USt (65 m / 1,9 t)	213 ft (65 m)
<b>Topless</b>			
MDT 249 J10	11.0 USt (10 t)	213 ft / 3.1 USt (65 m / 2,75 t)	213 ft (65 m)
MDT 249 J12	13.2 USt (12 t)	213 ft / 2.85 USt (65 m / 2,6 t)	213 ft (65 m)
MDT 259 J10	11.0 USt (10 t)	213 ft / 3.4 USt (65 m / 3,1 t)	213 ft (65 m)
MDT 259 J12	13.2 USt (12 t)	213 ft / 3.2 USt (65 m / 2,9 t)	213 ft (65 m)
MDT 269 J10	11.0 USt (10 t)	213 ft /3.7 USt (65 m / 3,3 t)	213 ft (65 m)
MDT 269 J12	13.2 USt (12 t)	213 ft / 3.5 USt (65 m / 3,1 t)	213 ft (65 m)
MDT 289	13.2 USt (12 t)	230 ft / 3.0 USt (70 m / 2,75 t)	230 ft (70 m)
MDT 319	13.2 USt (12 t)	230 ft / 3.5 USt (70 m / 3,2 t)	230 ft (70 m)
MDT 349 L12	13.2 USt (12 t)	246 ft /3.5 USt (75 m / 3,2 t)	246 ft (75 m)
MDT 349 L16	17.6 USt (16 t)	246 ft /3.3 USt (75 m / 3 t)	246 ft (75 m)
MDT 389 L12	13.2 USt (12 t)	246 ft / 3.8 USt (75 m / 3,4 t)	246 ft (75 m)
MDT 389 L16	17.6 USt (16 t)	246 ft / 3.7 USt (75 m / 3,3 t)	246 ft (75 m)
MDT 489 M20	22 USt (20 t)	262 ft / 3.9 USt (80 m / 3,5 t)	262 ft (80 m)
MDT 489 M25	27.6 USt (25 t)	262 ft / 3.9 USt (80 m / 3,5 t)	262 ft (80 m)
MDT 569 M20	22 USt (20 t)	262 ft / 46.3 USt (80 m / 4,2 t)	262 ft (80 m)
MDT 569 M25	27.6 USt (25 t)	262 ft / 46.3 USt (80 m / 4,2 t)	262 ft (80 m)
MDT 569 M32	35.3 USt (32 t)	262 ft / 39.7 USt (80 m / 3,6 t)	262 ft (80 m)
MDT 809 M25	27.6 USt (25 t)	262 ft / 9.9 USt (80 m / 9 t)	262 ft (80 m)
MDT 809 M32	35.3 USt (32 t)	262 ft / 9.1 USt (80 m / 8,3 t)	262 ft (80 m)
MDT 809 M40	44.1 USt (40 t)	262 ft / 9.1 USt (80 m / 8,3 t)	262 ft (80 m)

Model	Capacity	Tip Capacity	Max Radius
<b>Luffing Jib</b>			
MRH 125	8.8 USt (8,0 t)	164 ft / 2.2 USt (50 m / 2 t)	164 ft (50 m)
MR 160 C	11.0 USt (10 t)	164 ft / 2.6 USt (50 m / 2,4 t)	164 ft (50 m)
MRH 175	11 USt (10 t)	180ft/1.65 USt (55 m / 1,5 t)	180 ft (55 m)
MR 225 A	15.4 USt (14 t)	180 ft / 2.4 USt (55 m / 2,15 t)	180 ft (55 m)
MR 229	15.4 USt (14 t)	180 ft / 2.98 USt / (55 m / 2,7 t)	180 ft (55 m)
MR 309 H16	17.6 USt (16 t)	197 ft / 3.7 USt (60 m / 3,4 t)	197 ft (60 m)
MR 309 H25	27.6 USt (25 t)	197 ft / 3.6 USt (60 m / 3,2 t)	197 ft (60 m)
MR 329 H16	17.6 USt (16 t)	197 ft / 3.7 USt (60 m / 3,4 t)	197 ft (60 m)
MR 329 H25	27.6 USt (25 t)	197 ft / 3.7 USt (60 m / 3,3 t)	197 ft (60 m)
MR 418 A	26.5 USt (24 t)	197 ft / 5.5 USt (60 m / 5 t)	197 ft (60 m)
MR 608	35.3 USt (32 t)	197 ft / 9.9 USt (60 m / 9,0 t)	197 ft (60 m)
MR 618	35.3 USt (32 t)	197 ft / 9.1 USt (60 m / 8,25 t)	197 ft (60 m)
<b>Hammerhead</b>			
MD 559	22 USt (20 t)	262 ft / 5.2 USt (80 m / 4,7 t)	262 ft (80 m)
MD 569	27.6 USt (25 t)	262 ft / 6.4 USt (80 m / 5,8 t)	262 ft (80 m)
MD 689 M25	27.6 USt (25 t)	262 ft / 7.4 USt (80 m / 6,7 t)	262 ft (80 m)
MD 689 M40	44.1 USt (40 t)	262 ft / 6.6 USt (80 m / 6 t)	262 ft (80 m)
MDLT 1109	44.1 USt (40 t)	262 ft / 12.2 USt (80 m / 11,1 t)	262 ft (80 m)
MD 1600	44.1 USt (40 t)	262 ft / 21.2 USt (80 m / 19,2 t)	262 ft (80 m)
MD 1600	70.5 USt (64 t)	262 ft / 19.2 USt (80 m / 17,4 t)	262 ft (80 m)
MD 2200	44.1 USt (40 t)	262 ft / 23.7 USt (80 m / 21,5 t)	262 ft (80 m)
MD 2200	70.5 USt (64 t)	262 ft / 25.9 USt (80 m / 23,5 t)	262 ft (80 m)
MD 3200	70.5 USt (64 t)	279 ft / 28.7 USt (85 m / 26 t)	279 ft (85 m)
MD 3200	88.8 USt (80 t)	230 ft / 42.7 USt (70 m / 38,7 t)	230 ft (70 m)