


EXTENDED UPPER
BOOM POINT
28° 35' OR
41° OFFSET

DISTANCE FROM ϕ MACHINE (IN METERS)

3.1m 6.1m 9.1m 12.2m 15.2m 18.3m 21.3m 24.4m 27.4m 30.5m 33.5m 36.6m 39.6m 42.7m 45.7m 48.8m 51.8m 54.9m 57.9m 61.0m 64.0m 67.0m 70.1m 73.2m 76.2m 79.3m 82.3m 85.4m 88.4m 91.4m 94.5m 97.5m

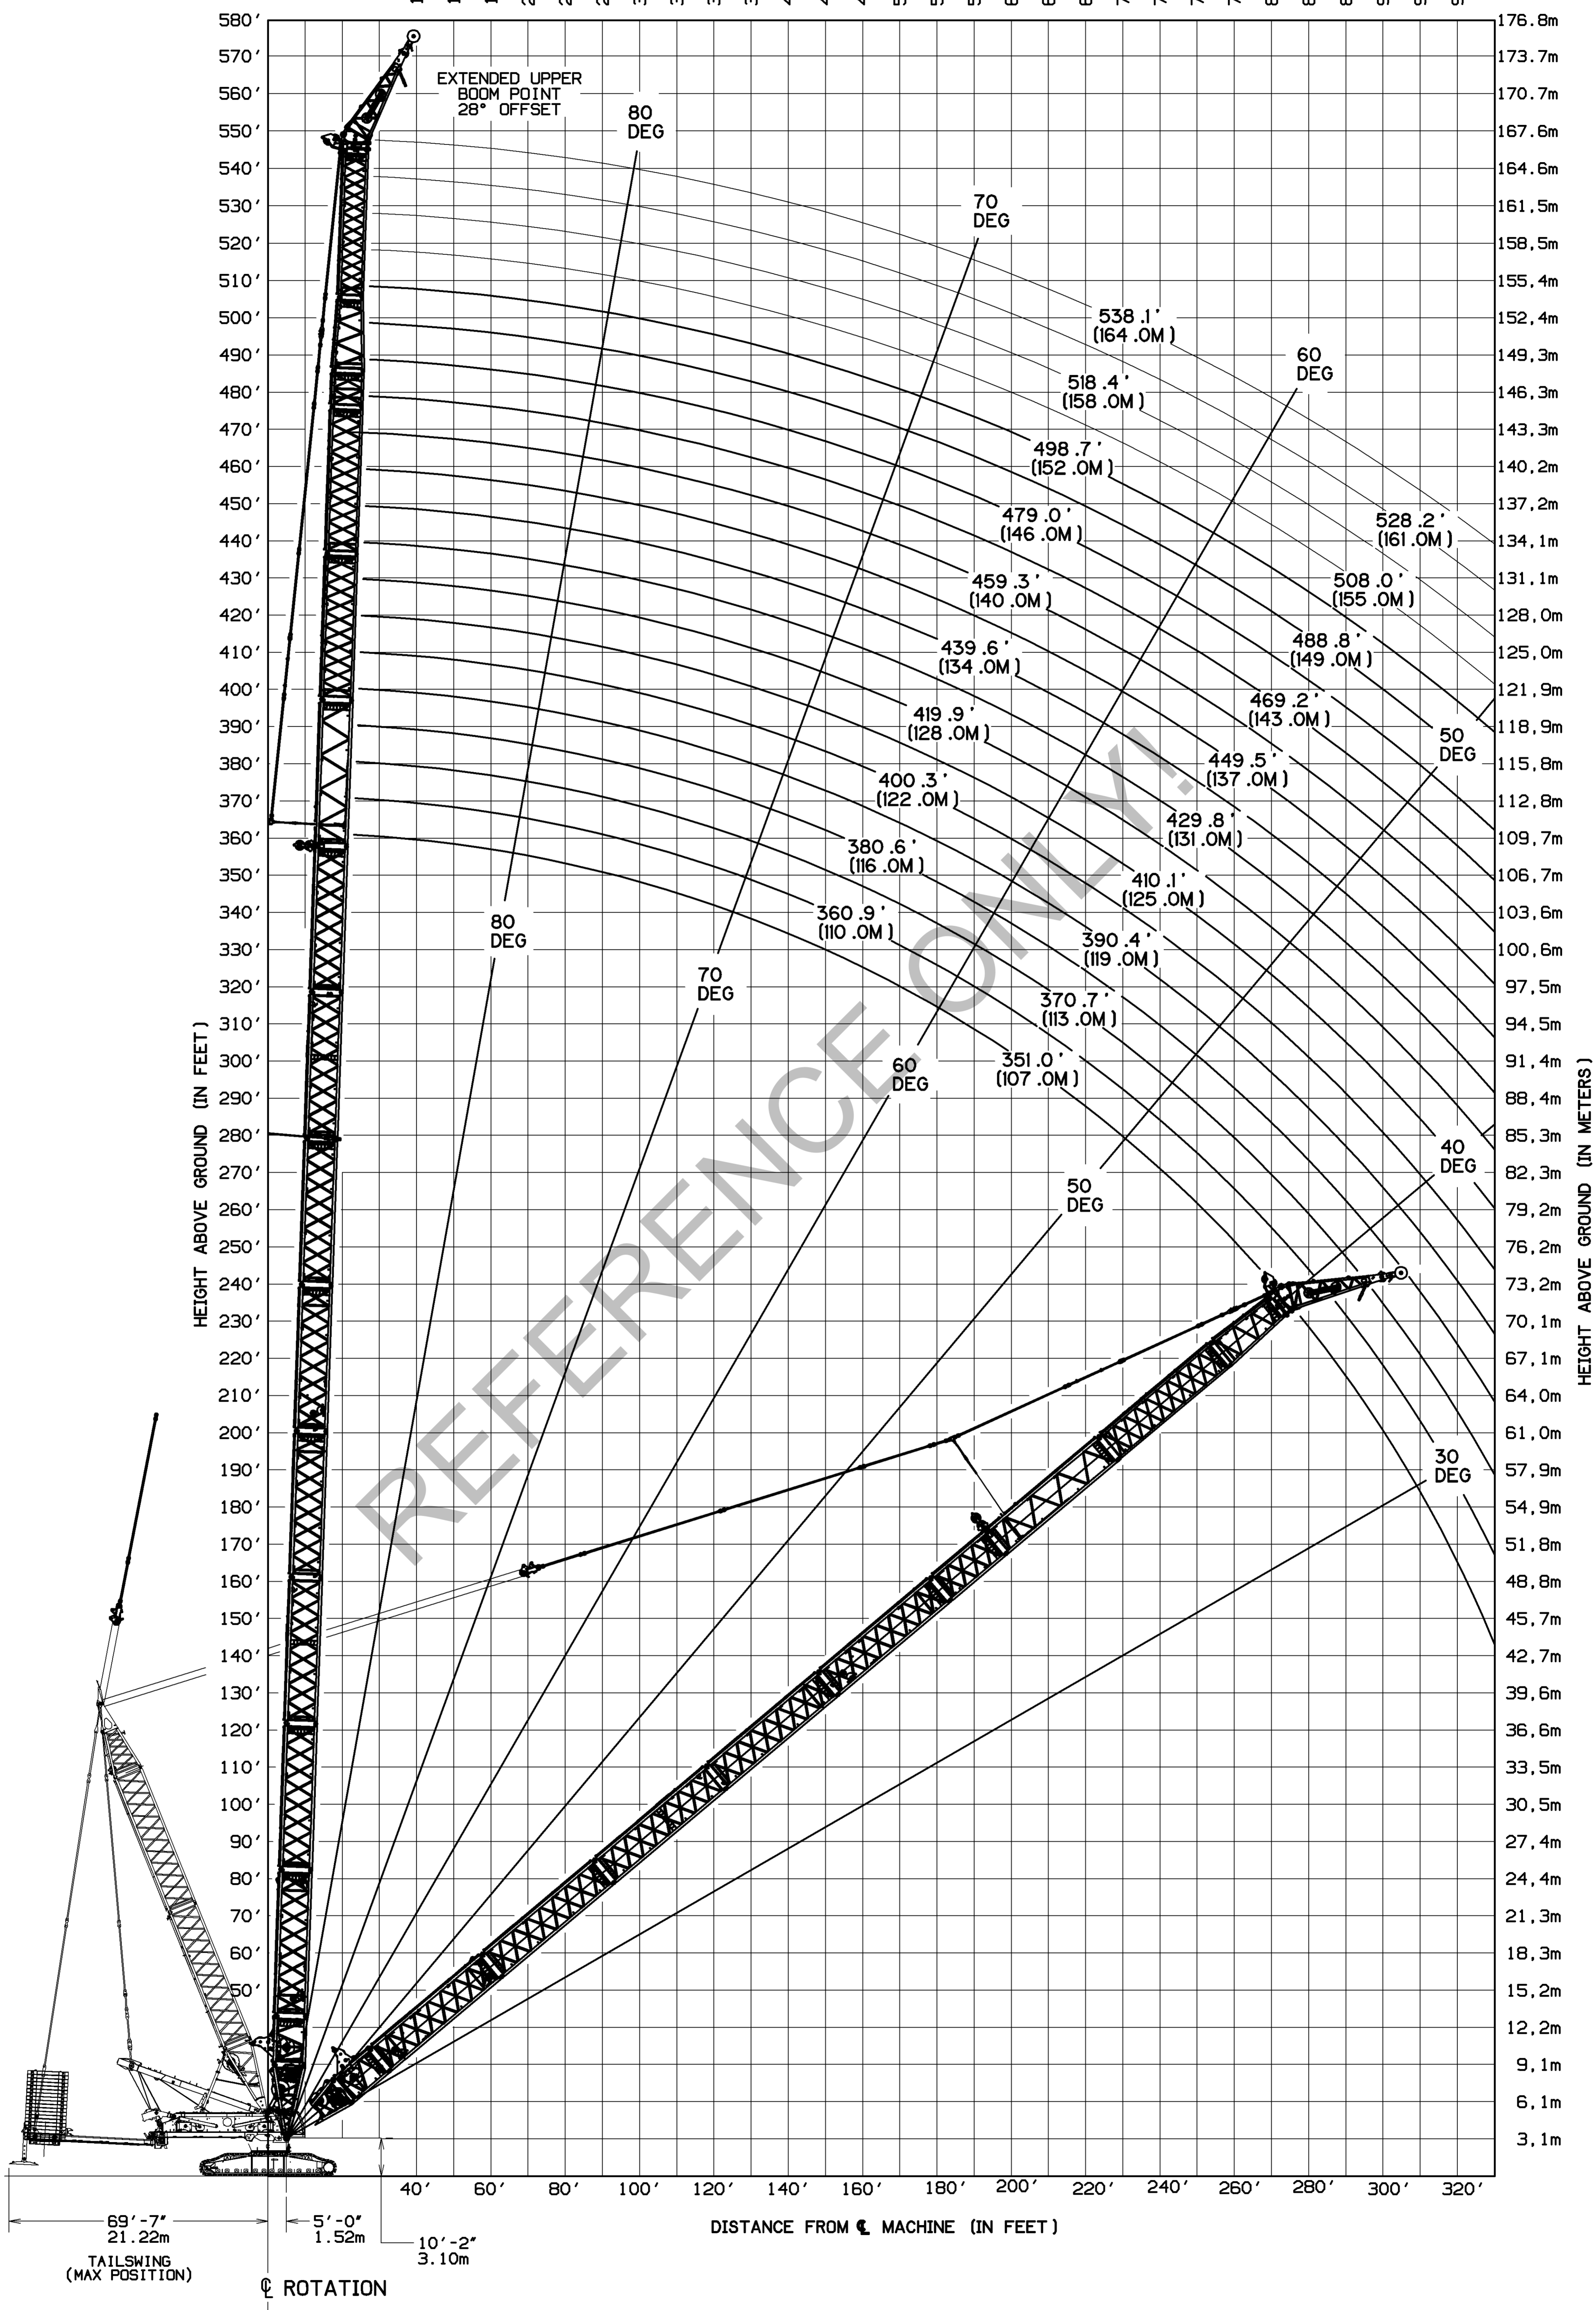

DATE 09-25-17	SCALE DR-AJB	Manitowoc Cranes, Inc. Manitowoc, Wisconsin	REVISION DATE	THIS PRINT REMAINS THE PROPERTY OF MANITOWOC CRANES, INC. ALL INFORMATION CONTAINED THEREIN IS CONFIDENTIAL. IT IS LOANED, SUBJECT TO RETURN UPON DEMAND, AND ON EXPRESS CONDITION THAT IT IS NOT TO BE COPIED OR USED DIRECTLY OR INDIRECTLY IN ANY MAY WHATSOEVER DETRIMENTAL TO OUR INTERESTS.	TOLERANCE UNLESS OTHERWISE SPECIFIED		
REV. LTR. A	CK-BLH	MODEL MLC650	DIAGRAM RNG B85:685-680-681-682		DECIMAL PLACES	FABRICATION	MACHINING
DWG. NO. 84051092	APPJAS			(1) PLACE 0.0	≤ 10 FEET ±.12	> 10 FEET ±.18	±.03
				(2) PLACE 0.00	±.06	±.12	±.015
				(3) PLACE 0.000	±.03	±.06	±.005
				ANGLES	±1'30"		±0'30"