


Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

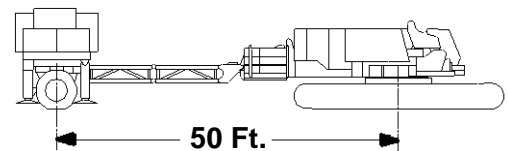

LIFTING CAPACITIES: Lifting capacities for various boom lengths and operating radii are for freely suspended loads and do not exceed 75% of a static tipping load. Capacities based on structural competence are denoted by an asterisk (*).

Wheeled counterweight must be attached to support beam and MAX-ER mode must be selected to operate. Swing and travel (forward or side crawl) requires proper position of counterweight wheels when contacting ground. Exit MAX-ER mode before operating without wheeled counterweight.

Upper boom point capacity for liftcrane service with single part whip line is 27,700 Lbs. or 55,400 Lbs. with two part whip line. When luffing hoist for 7/8 in. wire rope is used, capacity is 20,000 Lbs. with single part whip line or 40,000 Lbs. with two part whip line. In all cases, upper boom point capacities cannot exceed those listed for main boom capacities.

Weight of jib, all load blocks, hooks, weight ball, slings, hoist lines, etc., beneath boom and jib point sheaves, is considered part of main boom load. Boom is not to be lowered beyond radii where combined weights are greater than rated capacity. Where no capacity is shown, operation is not intended or approved.

OPERATING CONDITIONS: Machine to operate on a firm uniformly supporting surface with gantry in intermediate position and mast up. Refer to boom rigging No. 195224, Wire Rope Specification chart No. 8262-A and Counterweight Arrangement chart No. 8412-A. Crane operator judgment must be used to allow for dynamic load effects of swinging, hoisting or lowering, travel, wind conditions, as well as adverse operating conditions and physical machine depreciation. Refer to operators manual for operating guidelines.

MACHINE TRAVEL: Machine to travel on a firm, level and uniformly supporting surface with boom within boom angle range shown in capacity chart. Travel may be limited depending upon ground conditions. Refer to Maximum Allowable Travel Specification chart No. 8263-A when operating without load.

OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation to center of vertical hoist line or load block. Boom angle is angle between horizontal and centerline of boom butt and inserts, and is an indication of operating radius. In all cases, operating radius shall govern capacity.

BOOM POINT ELEVATION: Boom point elevation is vertical distance from ground level to centerline of boom point shaft.

MACHINE EQUIPMENT: Machine equipped with MAX-ER 2000, 30 Ft. 9 in. crawlers, 48 in. treads, 28 Ft. retractable gantry, 130 Ft. mast, 10 part boom hoist reeving, boom support straps, 169,200 Lb. crane counterweight, two 30,000 Lb. carbody counterweights and wheeled counterweight as specified.

WARNING: Check amount of wheeled counterweight on machine before use of this chart. Refer to Counterweight Assembly.

Consult jib chart for jib capacities. Upper boom point cannot be used when jib is attached.

Deduct From Capacities When Jib Is Attached	
Jib Length	Jib No. 132
40 Ft.	6,400 Lbs.
60 Ft.	8,200 Lbs.
80 Ft.	10,300 Lbs.
100 Ft.	12,800 Lbs.
120 Ft.	15,300 Lbs.

Boom Catwalks Deduct
Deduct 800 Lbs. from capacities when boom catwalks are attached.




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

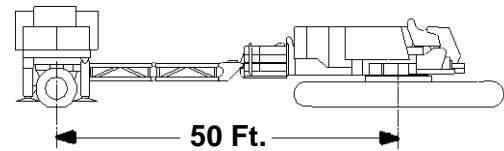


Maximum Boom and Jib Lengths Lifted Unassisted			
Over End of Blocked Crawlers		Over Side or End of Unblocked Crawlers	
Boom Length	Jib No. 132	Boom Length	Jib No. 132
0 Lb. Wheeled Counterweight			
220 Ft.	—	220 Ft.	—
200 Ft.	100 Ft.	200 Ft.	40 Ft.
120,000 Lb. Wheeled Counterweight			
340 Ft.	Not Allowed	(a) 320 Ft.	Not Allowed
240,000 Lb. Wheeled Counterweight			
400 Ft.	—	400 Ft.	—
380 Ft.	—	380 Ft.	—
360 Ft.	60 Ft.	360 Ft.	60 Ft.
340 Ft.	120 Ft.	340 Ft.	120 Ft.
362,000 Lb. Wheeled Counterweight			
400 Ft.	Not Allowed	400 Ft.	Not Allowed
462,000 Lb. Wheeled Counterweight			
400 Ft.	40 Ft.	400 Ft.	40 Ft.
380 Ft.	120 Ft.	380 Ft.	120 Ft.
Load block, hook and weight ball on ground at start. (a) Machine must be equipped with upperworks jacking cylinders when boom catwalks are attached.			

Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 0 Lb. Thru 462,000 Lb. Wheeled Counterweight
 at 50 Ft. Position
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

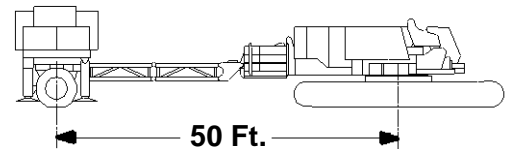

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	0 Lb. Wheeled Counterweight Boom Capacity Pounds	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
200 Ft. Boom								
38	81.4	207.5	281,400	412,700 *	520,400 *	600,000 *	600,000 *	38
40	80.8	207.1	259,300	391,500 *	494,000 *	598,300 *	600,000 *	40
45	79.3	206.2	215,700	346,300 *	437,900 *	531,100 *	600,000 *	45
50	77.9	205.1	183,400	309,700 *	392,600 *	476,800 *	545,800 *	50
55	76.4	203.9	158,500	279,600 *	355,200 *	432,000 *	495,000 *	55
60	74.9	202.5	138,700	254,300 *	323,800 *	394,400 *	452,300 *	60
65	73.4	201.0	122,500	232,700 *	297,000 *	362,400 *	416,000 *	65
70	71.9	199.4	109,100	212,200	274,000 *	334,900 *	384,800 *	70
75	70.4	197.6	97,800	192,800	254,000 *	310,900 *	357,500 *	75
80	68.9	195.7	88,100	176,200	236,400 *	289,800 *	333,600 *	80
85	67.3	193.6	79,800	161,900	220,800 *	271,100 *	312,400 *	85
90	65.7	191.3	72,500	149,400	206,900 *	254,500 *	293,500 *	90
95	64.1	188.9	66,000	138,300	194,400 *	239,600 *	276,600 *	95
100	62.5	186.3	60,300	128,500	183,100 *	226,100 *	261,300 *	100
105	60.9	183.5	55,200	119,800	172,900 *	213,900 *	247,400 *	105
110	59.2	180.5	50,600	111,900	163,600 *	202,700 *	234,800 *	110
115	57.5	177.3	46,400	104,800	155,100 *	192,500 *	223,200 *	115
120	55.8	173.9	42,600	98,300	147,200 *	183,200 *	212,600 *	120
125	54.0	170.3	39,200	92,400	140,000 *	174,500 *	202,800 *	125
130	52.2	166.4	36,000	87,000	133,300 *	166,600 *	193,800 *	130
135	50.4	162.3	33,100	82,000	126,700	159,100 *	185,400 *	135
140	48.4	157.9	30,400	77,400	120,300	152,300 *	177,600 *	140
145	46.5	153.2	27,900	73,100	114,400	145,800 *	170,300 *	145
150	44.4	148.1	25,500	69,200	109,000	139,800 *	163,500 *	150
155	42.3	142.7	23,400	65,500	103,900	134,200 *	157,100 *	155
160	40.1	136.8	21,300	62,000	99,200	128,900 *	151,100 *	160
165	37.8	130.4	19,400	58,800	94,700	123,900 *	145,400 *	165
170	35.3	123.4	17,600	55,700	90,600	119,200 *	140,100 *	170
175	32.7	115.8	15,900	52,900	86,600	114,800 *	135,100 *	175
180	29.9	107.3	14,300	50,200	82,900	110,600 *	130,300 *	180
185	26.8	97.7	12,800	47,600	79,400	106,600 *	125,800 *	185
190	23.3	86.6	11,300	45,200	76,100	102,800 *	121,500 *	190
195	19.2	73.1	10,000	42,900	73,000	99,100 *	117,400 *	195




Liftcrane Boom Capacities

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

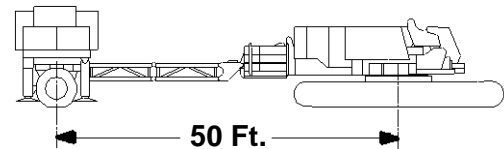


Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	0 Lb. Wheeled Counterweight Boom Capacity Pounds	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
220 Ft. Boom								
38	82.2	227.7	279,900	410,500 *	518,200 *	567,900 *	567,900 *	38
40	81.6	227.4	257,900	389,300 *	491,800 *	562,900 *	562,900 *	40
45	80.3	226.6	214,200	344,100 *	435,800 *	528,900 *	557,900 *	45
50	79.0	225.6	181,900	307,600 *	390,500 *	474,700 *	543,700 *	50
55	77.7	224.5	156,900	277,500 *	353,100 *	429,900 *	492,900 *	55
60	76.3	223.2	137,100	252,200 *	321,700 *	392,400 *	450,300 *	60
65	75.0	221.9	120,900	230,700 *	295,000 *	360,400 *	414,000 *	65
70	73.6	220.4	107,500	210,600	272,000 *	332,900 *	382,800 *	70
75	72.2	218.8	96,200	191,200	252,000 *	308,900 *	355,600 *	75
80	70.9	217.1	86,500	174,600	234,400 *	287,900 *	331,700 *	80
85	69.5	215.2	78,200	160,300	218,900 *	269,200 *	310,500 *	85
90	68.1	213.2	70,900	147,800	205,000 *	252,600 *	291,600 *	90
95	66.7	211.0	64,400	136,700	192,500 *	237,700 *	274,700 *	95
100	65.2	208.7	58,700	126,900	181,300 *	224,200 *	259,400 *	100
105	63.8	206.2	53,600	118,200	171,100 *	212,000 *	245,600 *	105
110	62.3	203.6	49,000	110,300	161,800 *	200,900 *	233,000 *	110
115	60.8	200.8	44,800	103,200	153,300 *	190,700 *	221,400 *	115
120	59.3	197.8	41,100	96,700	145,400 *	181,400 *	210,800 *	120
125	57.8	194.7	37,600	90,800	138,200 *	172,700 *	201,000 *	125
130	56.2	191.3	34,400	85,400	131,600 *	164,800 *	192,000 *	130
135	54.6	187.8	31,500	80,400	125,100	157,400 *	183,600 *	135
140	53.0	184.0	28,800	75,800	118,800	150,500 *	175,800 *	140
145	51.3	180.0	26,300	71,600	112,900	144,100 *	168,500 *	145
150	49.6	175.8	24,000	67,600	107,400	138,100 *	161,700 *	150
155	47.8	171.3	21,800	63,900	102,400	132,500 *	155,400 *	155
160	46.0	166.5	19,800	60,500	97,600	127,200 *	149,400 *	160
165	44.2	161.4	17,900	57,300	93,200	122,200 *	143,700 *	165
170	42.2	155.9	16,100	54,200	89,000	117,500 *	138,400 *	170
175	40.2	150.0	14,400	51,400	85,100	113,100 *	133,400 *	175
180	38.1	143.7	12,900	48,700	81,500	108,900 *	128,700 *	180
185	35.9	136.9	11,300	46,200	78,000	105,000 *	124,200 *	185
190	33.6	129.5	9,900	43,800	74,700	101,200 *	119,900 *	190
195	31.1	121.4	8,600	41,500	71,600	97,600 *	115,900 *	195
200	28.4	112.3	7,300	39,300	68,600	94,200 *	112,000 *	200
205	25.5	102.2	6,000	37,300	65,800	90,900 *	108,300 *	205
210	22.2	90.4	4,900	35,300	63,100	87,800 *	104,800 *	210

Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

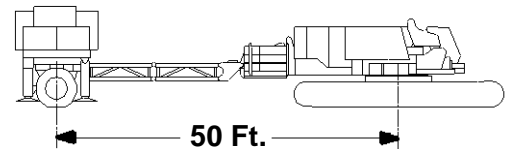

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
240 Ft. Boom							
38	82.8	247.9	407,700 *	515,300 *	515,300 *	515,300 *	38
40	82.3	247.6	386,500 *	489,000 *	510,300 *	510,300 *	40
45	81.1	246.9	341,400 *	433,000 *	505,300 *	505,300 *	45
50	79.9	246.0	304,900 *	387,700 *	471,900 *	500,300 *	50
55	78.7	245.0	274,800 *	350,300 *	427,200 *	490,200 *	55
60	77.5	243.8	249,500 *	319,000 *	389,700 *	447,600 *	60
65	76.3	242.6	228,000 *	292,300 *	357,700 *	411,300 *	65
70	75.0	241.3	208,600	269,300 *	330,200 *	380,100 *	70
75	73.8	239.8	189,100	249,300 *	306,200 *	352,900 *	75
80	72.5	238.2	172,500	231,700 *	285,200 *	329,000 *	80
85	71.3	236.5	158,100	216,200 *	266,500 *	307,800 *	85
90	70.0	234.7	145,600	202,300 *	249,900 *	289,000 *	90
95	68.7	232.7	134,500	189,800 *	235,000 *	272,000 *	95
100	67.4	230.7	124,700	178,600 *	221,600 *	256,800 *	100
105	66.1	228.4	115,900	168,400 *	209,400 *	242,900 *	105
110	64.8	226.1	108,100	159,100 *	198,200 *	230,300 *	110
115	63.5	223.6	100,900	150,600 *	188,100 *	218,800 *	115
120	62.1	220.9	94,400	142,800 *	178,700 *	208,200 *	120
125	60.7	218.1	88,500	135,600 *	170,100 *	198,400 *	125
130	59.4	215.2	83,100	128,900 *	162,100 *	189,400 *	130
135	57.9	212.0	78,100	122,800 *	154,800 *	181,000 *	135
140	56.5	208.7	73,500	116,400	147,900 *	173,200 *	140
145	55.1	205.2	69,200	110,600	141,500 *	165,900 *	145
150	53.6	201.5	65,300	105,100	135,500 *	159,100 *	150
155	52.1	197.7	61,600	100,000	129,900 *	152,800 *	155
160	50.5	193.6	58,100	95,300	124,600 *	146,800 *	160
165	48.9	189.2	54,900	90,900	119,600 *	141,200 *	165
170	47.3	184.6	51,900	86,700	115,000 *	135,900 *	170
175	45.7	179.8	49,000	82,800	110,500 *	130,800 *	175
180	43.9	174.6	46,400	79,100	106,400 *	126,100 *	180
185	42.2	169.1	43,800	75,600	102,400 *	121,600 *	185
190	40.3	163.3	41,400	72,400	98,700 *	117,400 *	190
195	38.4	157.0	39,200	69,200	95,100 *	113,300 *	195
200	36.4	150.3	37,000	66,300	91,700 *	109,500 *	200
205	34.3	143.1	35,000	63,500	88,400 *	105,800 *	205
210	32.1	135.2	33,000	60,800	85,300 *	102,300 *	210
220	27.2	117.2	29,400	55,800	79,600 *	95,700 *	220
230	21.2	94.1	26,000	51,300	74,200 *	89,700 *	230




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

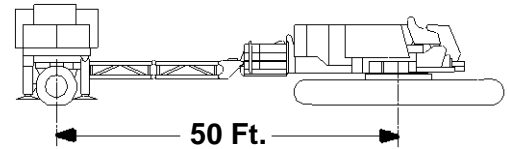

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
260 Ft. Boom							
40	82.9	267.8	386,000 *	447,300 *	447,300 *	447,300 *	40
45	81.8	267.1	340,900 *	432,500 *	442,300 *	442,300 *	45
50	80.7	266.3	304,400 *	387,200 *	437,300 *	437,300 *	50
55	79.6	265.4	274,300 *	349,900 *	426,700 *	432,300 *	55
60	78.5	264.3	249,100 *	318,600 *	389,200 *	427,300 *	60
65	77.3	263.2	227,600 *	291,900 *	357,300 *	410,900 *	65
70	76.2	262.0	208,700	268,900 *	329,800 *	379,600 *	70
75	75.1	260.6	189,200	248,900 *	305,800 *	352,400 *	75
80	73.9	259.2	172,600	231,300 *	284,800 *	328,600 *	80
85	72.8	257.6	158,200	215,800 *	266,100 *	307,400 *	85
90	71.6	256.0	145,600	201,900 *	249,500 *	288,600 *	90
95	70.4	254.2	134,500	189,400 *	234,600 *	271,700 *	95
100	69.2	252.3	124,700	178,200 *	221,200 *	256,400 *	100
105	68.1	250.2	115,900	168,000 *	209,000 *	242,600 *	105
110	66.9	248.1	108,000	158,700 *	197,900 *	230,000 *	110
115	65.7	245.8	100,900	150,200 *	187,700 *	218,400 *	115
120	64.4	243.4	94,400	142,400 *	178,400 *	207,800 *	120
125	63.2	240.9	88,500	135,300 *	169,800 *	198,100 *	125
130	61.9	238.2	83,000	128,600 *	161,800 *	189,000 *	130
135	60.7	235.4	78,000	122,400 *	154,400 *	180,600 *	135
140	59.4	232.5	73,400	116,400	147,600 *	172,900 *	140
145	58.1	229.4	69,200	110,500	141,200 *	165,600 *	145
150	56.8	226.1	65,200	105,000	135,200 *	158,800 *	150
155	55.5	222.7	61,500	100,000	129,600 *	152,400 *	155
160	54.1	219.0	58,100	95,200	124,300 *	146,500 *	160
165	52.7	215.2	54,800	90,800	119,300 *	140,900 *	165
170	51.3	211.2	51,800	86,600	114,700 *	135,600 *	170
175	49.9	207.0	49,000	82,700	110,300 *	130,600 *	175
180	48.4	202.6	46,300	79,000	106,100 *	125,800 *	180
185	46.9	197.9	43,800	75,600	102,100 *	121,400 *	185
190	45.3	193.0	41,400	72,300	98,400 *	117,100 *	190
195	43.7	187.8	39,100	69,200	94,800 *	113,100 *	195
200	42.1	182.3	36,900	66,200	91,400 *	109,200 *	200
205	40.4	176.5	34,900	63,400	88,200 *	105,600 *	205
210	38.7	170.3	33,000	60,800	85,100 *	102,100 *	210
220	34.9	156.6	29,300	55,800	79,400 *	95,500 *	220
230	30.8	140.7	26,000	51,300	74,100 *	89,600 *	230
240	26.1	121.8	23,000	47,100	69,200 *	84,000 *	240
250	20.3	97.7	20,100	43,300	64,700 *	78,900 *	250




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

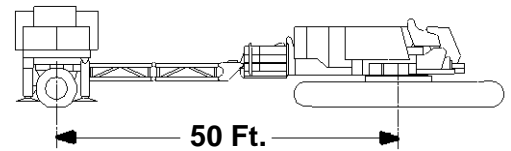

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
280 Ft. Boom							
45	82.4	287.3	340,900 *	373,500 *	373,500 *	373,500 *	45
50	81.4	286.6	304,400 *	370,300 *	370,300 *	370,300 *	50
55	80.3	285.7	274,300 *	349,900 *	358,600 *	358,600 *	55
60	79.3	284.8	249,100 *	318,600 *	347,400 *	347,400 *	60
65	78.3	283.7	227,600 *	292,000 *	336,200 *	336,200 *	65
70	77.2	282.6	209,100 *	269,000 *	325,700 *	325,700 *	70
75	76.2	281.3	189,800	249,000 *	305,900 *	315,500 *	75
80	75.1	280.0	173,100	231,400 *	284,900 *	305,700 *	80
85	74.0	278.6	158,700	215,900 *	266,300 *	296,200 *	85
90	73.0	277.0	146,100	202,000 *	249,700 *	286,800 *	90
95	71.9	275.4	135,000	189,600 *	234,800 *	271,800 *	95
100	70.8	273.6	125,200	178,400 *	221,300 *	256,500 *	100
105	69.7	271.8	116,400	168,200 *	209,100 *	242,700 *	105
110	68.6	269.8	108,500	158,900 *	198,000 *	230,100 *	110
115	67.5	267.7	101,300	150,400 *	187,900 *	218,600 *	115
120	66.4	265.5	94,800	142,600 *	178,500 *	208,000 *	120
125	65.3	263.2	88,900	135,400 *	169,900 *	198,200 *	125
130	64.1	260.8	83,500	128,800 *	162,000 *	189,200 *	130
135	63.0	258.3	78,500	122,600 *	154,600 *	180,800 *	135
140	61.8	255.6	73,900	116,800	147,800 *	173,100 *	140
145	60.6	252.8	69,600	110,900	141,400 *	165,800 *	145
150	59.4	249.8	65,600	105,400	135,400 *	159,000 *	150
155	58.2	246.7	61,900	100,400	129,800 *	152,700 *	155
160	57.0	243.5	58,500	95,600	124,500 *	146,700 *	160
165	55.8	240.1	55,300	91,200	119,600 *	141,100 *	165
170	54.5	236.5	52,200	87,000	114,900 *	135,800 *	170
175	53.3	232.8	49,400	83,100	110,500 *	130,800 *	175
180	52.0	228.9	46,700	79,400	106,300 *	126,100 *	180
185	50.6	224.8	44,200	76,000	102,400 *	121,600 *	185
190	49.3	220.5	41,800	72,700	98,600 *	117,400 *	190
195	47.9	216.0	39,500	69,600	95,100 *	113,300 *	195
200	46.5	211.3	37,400	66,600	91,700 *	109,500 *	200
205	45.1	206.3	35,300	63,800	88,500 *	105,800 *	205
210	43.6	201.1	33,400	61,200	85,400 *	102,400 *	210
220	40.5	189.7	29,800	56,200	79,700 *	95,900 *	220
230	37.2	177.1	26,500	51,700	74,400 *	89,900 *	230
240	33.6	162.7	23,500	47,600	69,600 *	84,400 *	240
250	29.6	146.0	20,700	43,800	65,100 *	79,300 *	250
260	25.1	126.2	18,100	40,300	60,900 *	74,600 *	260
270	19.5	101.1	15,600	37,000	57,000 *	66,300 *	270




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

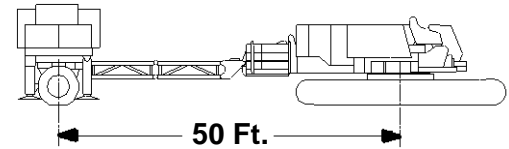

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
300 Ft. Boom							
45	82.9	307.5	314,400 *	314,400 *	314,400 *	314,400 *	45
50	82.0	306.8	303,700 *	313,300 *	313,300 *	313,300 *	50
55	81.0	306.0	273,600 *	312,200 *	312,200 *	312,200 *	55
60	80.0	305.1	248,400 *	311,100 *	311,100 *	311,100 *	60
65	79.0	304.2	226,900 *	291,200 *	309,900 *	309,900 *	65
70	78.1	303.1	208,400 *	268,300 *	300,300 *	300,300 *	70
75	77.1	301.9	189,500	248,300 *	290,900 *	290,900 *	75
80	76.1	300.7	172,800	230,700 *	281,900 *	281,900 *	80
85	75.1	299.4	158,400	215,200 *	265,600 *	273,300 *	85
90	74.1	297.9	145,800	201,300 *	249,000 *	264,900 *	90
95	73.1	296.4	134,700	188,900 *	234,100 *	256,800 *	95
100	72.1	294.8	124,800	177,700 *	220,600 *	248,900 *	100
105	71.1	293.1	116,000	167,500 *	208,500 *	241,200 *	105
110	70.1	291.3	108,100	158,200 *	197,400 *	229,400 *	110
115	69.1	289.3	100,900	149,700 *	187,200 *	217,900 *	115
120	68.0	287.3	94,400	142,000 *	177,900 *	207,300 *	120
125	67.0	285.2	88,500	134,800 *	169,300 *	197,600 *	125
130	66.0	283.0	83,100	128,100 *	161,300 *	188,600 *	130
135	64.9	280.6	78,100	122,000 *	154,000 *	180,200 *	135
140	63.8	278.2	73,400	116,200 *	147,100 *	172,400 *	140
145	62.8	275.6	69,200	110,500	140,700 *	165,200 *	145
150	61.7	272.9	65,200	105,000	134,700 *	158,400 *	150
155	60.6	270.1	61,500	100,000	129,200 *	152,000 *	155
160	59.5	267.1	58,100	95,200	123,900 *	146,100 *	160
165	58.4	264.1	54,800	90,800	119,000 *	140,500 *	165
170	57.2	260.8	51,800	86,600	114,300 *	135,200 *	170
175	56.1	257.5	49,000	82,700	109,900 *	130,200 *	175
180	54.9	254.0	46,300	79,000	105,700 *	125,500 *	180
185	53.7	250.3	43,700	75,500	101,800 *	121,000 *	185
190	52.5	246.5	41,400	72,300	98,100 *	116,800 *	190
195	51.3	242.5	39,100	69,200	94,500 *	112,700 *	195
200	50.1	238.3	36,900	66,200	91,100 *	108,900 *	200
205	48.8	233.9	34,900	63,400	87,900 *	105,300 *	205
210	47.5	229.4	33,000	60,800	84,800 *	101,800 *	210
220	44.8	219.6	29,400	55,800	79,100 *	95,300 *	220
230	42.0	208.8	26,100	51,300	73,900 *	89,400 *	230
240	39.0	196.9	23,100	47,200	69,000 *	83,900 *	240
250	35.9	183.5	20,300	43,400	64,600 *	78,800 *	250
260	32.4	168.5	17,700	39,900	60,400 *	74,200 *	260
270	28.6	151.1	15,300	36,700	56,600 *	67,600 *	270
280	24.2	130.4	13,100	33,700	53,000 *	59,600 *	280
290	18.8	104.3	11,000	30,800	49,600 *	51,200 *	290




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

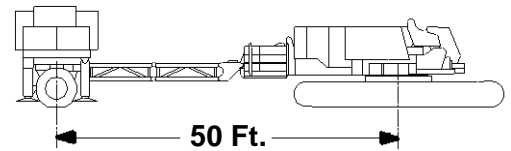

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
320 Ft. Boom							
50	82.5	327.0	280,900 *	280,900 *	280,900 *	280,900 *	50
55	81.6	326.3	269,600 *	278,900 *	278,900 *	278,900 *	55
60	80.7	325.4	244,400 *	276,900 *	276,900 *	276,900 *	60
65	79.7	324.5	222,900 *	274,900 *	274,900 *	274,900 *	65
70	78.8	323.5	204,400 *	264,300 *	272,900 *	272,900 *	70
75	77.9	322.5	186,200	244,300 *	270,900 *	270,900 *	75
80	77.0	321.3	169,500	226,700 *	262,000 *	262,000 *	80
85	76.1	320.1	155,000	211,200 *	253,600 *	253,600 *	85
90	75.1	318.7	142,300	197,300 *	245,000 *	245,500 *	90
95	74.2	317.3	131,200	184,900 *	230,100 *	237,500 *	95
100	73.3	315.8	121,300	173,700 *	216,700 *	229,800 *	100
105	72.3	314.2	112,500	163,500 *	204,500 *	222,400 *	105
110	71.4	312.5	104,600	154,300 *	193,400 *	215,100 *	110
115	70.4	310.7	97,400	145,800 *	183,200 *	208,100 *	115
120	69.5	308.9	90,900	138,000 *	173,900 *	201,000 *	120
125	68.5	306.9	84,900	130,800 *	165,300 *	193,500 *	125
130	67.6	304.8	79,500	124,200 *	157,400 *	184,500 *	130
135	66.6	302.7	74,500	118,000 *	150,000 *	176,100 *	135
140	65.6	300.4	69,800	112,300 *	143,200 *	168,300 *	140
145	64.6	298.0	65,500	106,900	136,800 *	161,100 *	145
150	63.6	295.5	61,600	101,400	130,800 *	154,300 *	150
155	62.6	292.9	57,900	96,300	125,200 *	147,900 *	155
160	61.6	290.2	54,400	91,600	120,000 *	142,000 *	160
165	60.6	287.4	51,200	87,100	115,000 *	136,300 *	165
170	59.5	284.5	48,100	82,900	110,400 *	131,100 *	170
175	58.5	281.4	45,300	79,000	106,000 *	126,100 *	175
180	57.4	278.2	42,600	75,400	101,800 *	121,300 *	180
185	56.3	274.9	40,100	71,900	97,900 *	116,900 *	185
190	55.2	271.4	37,700	68,600	94,100 *	112,600 *	190
195	54.1	267.8	35,400	65,500	90,600 *	108,600 *	195
200	53.0	264.0	33,300	62,500	87,200 *	104,800 *	200
205	51.9	260.1	31,200	59,700	84,000 *	101,100 *	205
210	50.7	256.0	29,300	57,100	80,900 *	97,700 *	210
220	48.3	247.3	25,700	52,100	75,200 *	91,200 *	220
230	45.9	237.9	22,400	47,600	70,000 *	85,200 *	230
240	43.3	227.5	19,400	43,500	65,200 *	79,700 *	240
250	40.6	216.2	16,600	39,700	60,700 *	74,700 *	250
260	37.7	203.7	14,000	36,300	56,600 *	70,000 *	260
270	34.7	189.8	11,700	33,000	52,800 *	65,700 *	270
280	31.3	174.1	9,500	30,000	49,200 *	61,600 *	280
290	27.6	156.0	7,400	27,200	45,900 *	57,800 *	290
300	23.4	134.5	5,400	24,600	42,700 *	54,300 *	300
310	18.2	107.5		22,100	39,700 *	50,900 *	310




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

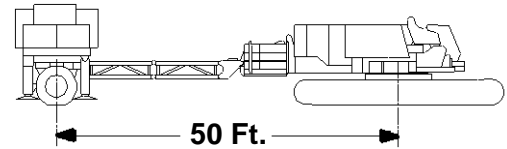


Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
340 Ft. Boom							
50	82.9	347.2	241,000 *	241,000 *	241,000 *	241,000 *	50
55	82.1	346.5	240,900 *	240,900 *	240,900 *	240,900 *	55
60	81.2	345.7	239,800 *	239,800 *	239,800 *	239,800 *	60
65	80.4	344.9	222,200 *	238,700 *	238,700 *	238,700 *	65
70	79.5	343.9	203,700 *	237,600 *	237,600 *	237,600 *	70
75	78.6	342.9	185,900	236,500 *	236,500 *	236,500 *	75
80	77.8	341.8	169,200	226,000 *	235,400 *	235,400 *	80
85	76.9	340.7	154,700	210,500 *	233,400 *	233,400 *	85
90	76.0	339.4	142,000	196,600 *	225,900 *	225,900 *	90
95	75.2	338.1	130,900	184,200 *	218,400 *	218,400 *	95
100	74.3	336.7	121,000	173,000 *	211,400 *	211,400 *	100
105	73.4	335.2	112,100	162,800 *	203,800 *	204,600 *	105
110	72.5	333.6	104,200	153,600 *	192,700 *	197,900 *	110
115	71.6	331.9	97,000	145,100 *	182,600 *	191,500 *	115
120	70.7	330.2	90,500	137,300 *	173,200 *	185,200 *	120
125	69.9	328.4	84,500	130,100 *	164,700 *	179,100 *	125
130	68.9	326.4	79,000	123,500 *	156,700 *	173,200 *	130
135	68.0	324.4	74,000	117,400 *	149,300 *	167,400 *	135
140	67.1	322.3	69,400	111,600 *	142,500 *	163,100 *	140
145	66.2	320.1	65,100	106,300 *	136,100 *	160,500 *	145
150	65.3	317.8	61,100	101,000	130,100 *	153,700 *	150
155	64.3	315.4	57,400	95,900	124,600 *	147,300 *	155
160	63.4	312.9	54,000	91,100	119,300 *	141,400 *	160
165	62.4	310.3	50,700	86,700	114,400 *	135,800 *	165
170	61.5	307.5	47,700	82,500	109,700 *	130,500 *	170
175	60.5	304.7	44,800	78,600	105,300 *	125,500 *	175
180	59.5	301.8	42,200	74,900	101,200 *	120,800 *	180
185	58.6	298.7	39,600	71,400	97,300 *	116,300 *	185
190	57.6	295.5	37,200	68,100	93,500 *	112,100 *	190
195	56.5	292.2	35,000	65,000	90,000 *	108,100 *	195
200	55.5	288.8	32,800	62,100	86,600 *	104,300 *	200
205	54.5	285.2	30,800	59,300	83,400 *	100,600 *	205
210	53.4	281.5	28,800	56,600	80,300 *	97,200 *	210
220	51.3	273.7	25,200	51,700	74,600 *	90,700 *	220
230	49.1	265.2	21,900	47,200	69,400 *	84,700 *	230
240	46.8	256.0	18,900	43,100	64,600 *	79,300 *	240
250	44.4	246.1	16,200	39,300	60,200 *	74,300 *	250
260	41.9	235.2	13,600	35,800	56,000 *	69,600 *	260
270	39.3	223.4	11,200	32,600	52,200 *	65,300 *	270
280	36.6	210.3	9,000	29,600	48,700 *	61,300 *	280
290	33.6	195.8	7,000	26,800	45,400 *	57,500 *	290
300	30.4	179.5	5,100	24,200	42,200 *	54,000 *	300
310	26.8	160.7		21,700	39,300 *	50,600 *	310
320	22.7	138.5		19,300 *	36,500 *	47,500 *	320
330	17.7	110.6		16,700 *	33,500 *	43,500 *	330

Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

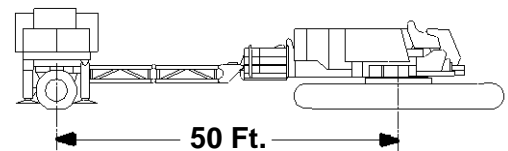

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
360 Ft. Boom						
55	82.5	366.7	205,900 *	205,900 *	205,900 *	55
60	81.7	366.0	202,400 *	202,400 *	202,400 *	60
65	80.9	365.2	199,600 *	199,600 *	199,600 *	65
70	80.1	364.3	192,300 *	192,300 *	192,300 *	70
75	79.3	363.3	185,200 *	185,200 *	185,200 *	75
80	78.5	362.3	178,100 *	178,100 *	178,100 *	80
85	77.6	361.2	171,400 *	171,400 *	171,400 *	85
90	76.8	360.0	164,700 *	164,700 *	164,700 *	90
95	76.0	358.8	158,200 *	158,200 *	158,200 *	95
100	75.2	357.5	151,900 *	151,900 *	151,900 *	100
105	74.4	356.1	145,600 *	145,600 *	145,600 *	105
110	73.5	354.6	139,800 *	139,800 *	139,800 *	110
115	72.7	353.0	133,900 *	133,900 *	133,900 *	115
120	71.9	351.4	128,800 *	128,800 *	128,800 *	120
125	71.0	349.6	127,900 *	127,900 *	127,900 *	125
130	70.2	347.8	123,400 *	127,000 *	127,000 *	130
135	69.3	345.9	117,200 *	126,100 *	126,100 *	135
140	68.5	344.0	111,500 *	125,200 *	125,200 *	140
145	67.6	341.9	106,200 *	124,300 *	124,300 *	145
150	66.7	339.8	101,000	123,400 *	123,400 *	150
155	65.9	337.5	95,900	122,500 *	122,500 *	155
160	65.0	335.2	91,200	119,200 *	121,600 *	160
165	64.1	332.7	86,700	114,300 *	120,700 *	165
170	63.2	330.2	82,600	109,600 *	119,800 *	170
175	62.3	327.6	78,600	105,200 *	118,900 *	175
180	61.4	324.9	75,000	101,100 *	118,000 *	180
185	60.5	322.0	71,500	97,200 *	116,300 *	185
190	59.6	319.1	68,200	93,400 *	112,000 *	190
195	58.6	316.1	65,100	89,900 *	108,000 *	195
200	57.7	312.9	62,100	86,500 *	104,200 *	200
205	56.7	309.6	59,300	83,300 *	100,600 *	205
210	55.8	306.2	56,700	80,300 *	97,100 *	210
220	53.8	299.0	51,800	74,600 *	90,600 *	220
230	51.8	291.3	47,300	69,300 *	84,700 *	230
240	49.7	283.0	43,200	64,500 *	79,300 *	240
250	47.6	274.1	39,400	60,100 *	74,200 *	250
260	45.4	264.4	35,900	56,000 *	69,600 *	260
270	43.1	254.0	32,700	52,200 *	65,300 *	270
280	40.7	242.7	29,700	48,700 *	61,300 *	280
290	38.2	230.3	26,900	45,400 *	57,500 *	290
300	35.5	216.7	24,300	42,300 *	54,000 *	300
310	32.6	201.7	21,900	39,400 *	50,700 *	310
320	29.5	184.7	19,400 *	36,600 *	47,600 *	320
330	26.0	165.3	16,900 *	33,600 *	44,700 *	330
340	22.0	142.4	14,400 *	30,700 *	39,500 *	340
350	17.1	113.5	12,100 *	27,900 *	33,700 *	350




Liftcrane Boom Capacities

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

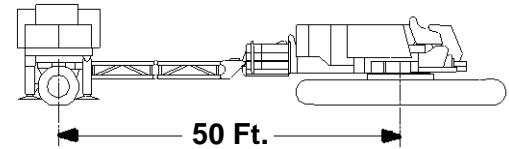

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
380 Ft. Boom						
55	82.9	386.9	177,800 *	177,800 *	177,800 *	55
60	82.1	386.2	175,800 *	175,800 *	175,800 *	60
65	81.4	385.4	173,800 *	173,800 *	173,800 *	65
70	80.6	384.6	171,800 *	171,800 *	171,800 *	70
75	79.8	383.7	168,700 *	168,700 *	168,700 *	75
80	79.1	382.7	162,300 *	162,300 *	162,300 *	80
85	78.3	381.7	155,900 *	155,900 *	155,900 *	85
90	77.5	380.6	149,800 *	149,800 *	149,800 *	90
95	76.8	379.4	143,700 *	143,700 *	143,700 *	95
100	76.0	378.2	137,900 *	137,900 *	137,900 *	100
105	75.2	376.8	132,100 *	132,100 *	132,100 *	105
110	74.4	375.4	131,300 *	131,300 *	131,300 *	110
115	73.6	374.0	130,500 *	130,500 *	130,500 *	115
120	72.8	372.4	129,700 *	129,700 *	129,700 *	120
125	72.1	370.8	128,900 *	128,900 *	128,900 *	125
130	71.3	369.1	122,500 *	128,100 *	128,100 *	130
135	70.5	367.3	116,400 *	127,300 *	127,300 *	135
140	69.7	365.4	110,700 *	126,500 *	126,500 *	140
145	68.8	363.5	105,300 *	125,700 *	125,700 *	145
150	68.0	361.5	100,400 *	124,900 *	124,900 *	150
155	67.2	359.4	95,300	123,600 *	124,100 *	155
160	66.4	357.2	90,500	118,400 *	123,300 *	160
165	65.6	354.9	86,100	113,400 *	122,500 *	165
170	64.7	352.6	81,900	108,800 *	121,700 *	170
175	63.9	350.1	78,000	104,400 *	120,900 *	175
180	63.0	347.6	74,300	100,300 *	119,900 *	180
185	62.2	344.9	70,800	96,400 *	115,500 *	185
190	61.3	342.2	67,500	92,600 *	111,300 *	190
195	60.5	339.4	64,400	89,100 *	107,200 *	195
200	59.6	336.4	61,500	85,700 *	103,400 *	200
205	58.7	333.4	58,700	82,500 *	99,800 *	205
210	57.8	330.2	56,000	79,500 *	96,300 *	210
220	56.0	323.6	51,100	73,800 *	89,900 *	220
230	54.2	316.5	46,600	68,600 *	83,900 *	230
240	52.3	308.9	42,500	63,800 *	78,500 *	240
250	50.3	300.8	38,700	59,400 *	73,500 *	250
260	48.3	292.1	35,300	55,300 *	68,900 *	260
270	46.3	282.7	32,000	51,500 *	64,600 *	270
280	44.1	272.6	29,100	47,900 *	60,600 *	280
290	41.9	261.7	26,300	44,600 *	56,800 *	290
300	39.6	249.9	23,700	41,600 *	53,300 *	300
310	37.1	237.0	21,200 *	38,700 *	50,000 *	310
320	34.5	223.0	18,500 *	35,800 *	46,900 *	320
330	31.7	207.3	15,900 *	32,700 *	44,000 *	330
340	28.7	189.8	13,500 *	29,800 *	40,300 *	340
350	25.3	169.8	11,300 *	27,100 *	35,100 *	350
360	21.4	146.1	9,100 *	24,500 *	30,100 *	360
370	16.7	116.4	6,900 *	21,900 *	25,200 *	370




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 50 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

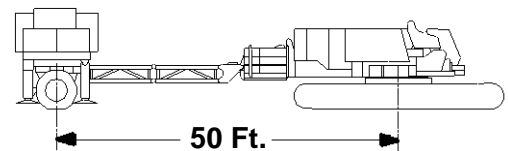

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
400 Ft. Boom						
60	82.5	406.4	148,000 *	148,000 *	148,000 *	60
65	81.8	405.7	141,900 *	141,900 *	141,900 *	65
70	81.1	404.9	135,800 *	135,800 *	135,800 *	70
75	80.4	404.0	129,900 *	129,900 *	129,900 *	75
80	79.6	403.1	124,100 *	124,100 *	124,100 *	80
85	78.9	402.1	118,300 *	118,300 *	118,300 *	85
90	78.2	401.1	112,800 *	112,800 *	112,800 *	90
95	77.4	400.0	107,300 *	107,300 *	107,300 *	95
100	76.7	398.8	106,800 *	106,800 *	106,800 *	100
105	76.0	397.5	106,300 *	106,300 *	106,300 *	105
110	75.2	396.2	105,800 *	105,800 *	105,800 *	110
115	74.5	394.8	105,300 *	105,300 *	105,300 *	115
120	73.7	393.3	104,800 *	104,800 *	104,800 *	120
125	73.0	391.8	104,300 *	104,300 *	104,300 *	125
130	72.2	390.2	103,800 *	103,800 *	103,800 *	130
135	71.5	388.5	103,300 *	103,300 *	103,300 *	135
140	70.7	386.8	102,800 *	102,800 *	102,800 *	140
145	70.0	384.9	102,300 *	102,300 *	102,300 *	145
150	69.2	383.0	100,000 *	101,800 *	101,800 *	150
155	68.4	381.1	95,100	101,300 *	101,300 *	155
160	67.6	379.0	90,400	100,800 *	100,800 *	160
165	66.9	376.9	85,900	100,300 *	100,300 *	165
170	66.1	374.6	81,700	99,800 *	99,800 *	170
175	65.3	372.3	77,800	99,300 *	99,300 *	175
180	64.5	369.9	74,100	98,800 *	98,800 *	180
185	63.7	367.5	70,700	96,000 *	98,300 *	185
190	62.9	364.9	67,400	92,300 *	97,800 *	190
195	62.1	362.3	64,300	88,800 *	97,300 *	195
200	61.3	359.5	61,300	85,400 *	96,800 *	200
205	60.4	356.7	58,500	82,200 *	96,300 *	205
210	59.6	353.7	55,900	79,200 *	95,800 *	210
220	57.9	347.6	50,900	73,500 *	89,600 *	220
230	56.2	341.0	46,400	68,300 *	83,700 *	230
240	54.5	334.0	42,300	63,500 *	78,300 *	240
250	52.7	326.5	38,600	59,100 *	73,300 *	250
260	50.8	318.5	35,100	55,000 *	68,600 *	260
270	49.0	309.9	31,900	51,200 *	64,300 *	270
280	47.0	300.8	28,900	47,700 *	60,300 *	280
290	45.0	291.0	26,100	44,400 *	56,600 *	290
300	42.9	280.5	23,500	41,300 *	53,100 *	300
310	40.8	269.2	20,900 *	38,400 *	49,800 *	310
320	38.5	256.9	18,200 *	35,500 *	46,800 *	320
330	36.1	243.6	15,700 *	32,500 *	43,900 *	330
340	33.6	229.0	13,300 *	29,600 *	41,100 *	340
350	30.9	212.9	11,000 *	26,900 *	36,600 *	350
360	27.9	194.8	8,900 *	24,300 *	31,900 *	360
370	24.6	174.2	6,800 *	21,800 *	27,400 *	370
380	20.8	149.8	4,800 *	19,400 *	23,000 *	380
390	16.2	119.2		17,200 *	18,600 *	390