




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

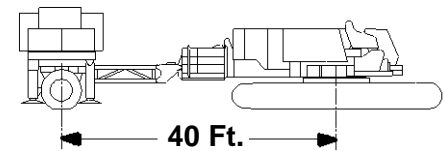

LIFTING CAPACITIES: Lifting capacities for various boom lengths and operating radii are for freely suspended loads and do not exceed 75% of a static tipping load. Capacities based on structural competence are denoted by an asterisk (*).

Wheeled counterweight must be attached to support beam and MAX-ER mode must be selected to operate. Swing and travel (forward or side crawl) requires proper position of counterweight wheels when contacting ground. Exit MAX-ER mode before operating without wheeled counterweight.

Upper boom point capacity for liftcrane service with single part whip line is 27,700 Lbs. or 55,400 Lbs. with two part whip line. When luffing hoist for 7/8 in. wire rope is used, capacity is 20,000 Lbs. with single part whip line or 40,000 Lbs. with two part whip line. In all cases, upper boom point capacities cannot exceed those listed for main boom capacities.

Weight of jib, all load blocks, hooks, weight ball, slings, hoist lines, etc., beneath boom and jib point sheaves, is considered part of main boom load. Boom is not to be lowered beyond radii where combined weights are greater than rated capacity. Where no capacity is shown, operation is not intended or approved.

OPERATING CONDITIONS: Machine to operate on a firm uniformly supporting surface with gantry in intermediate position and mast up. Refer to boom rigging No. 195224, Wire Rope Specification chart No. 8262-A and Counterweight Arrangement chart No. 8412-A. Crane operator judgment must be used to allow for dynamic load effects of swinging, hoisting or lowering, travel, wind conditions, as well as adverse operating conditions and physical machine depreciation. Refer to operators manual for operating guidelines.

MACHINE TRAVEL: Machine to travel on a firm, level and uniformly supporting surface with boom within boom angle range shown in capacity chart. Travel may be limited depending upon ground conditions. Refer to Maximum Allowable Travel Specification chart No. 8263-A when operating without load.

OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation to center of vertical hoist line or load block. Boom angle is angle between horizontal and centerline of boom butt and inserts, and is an indication of operating radius. In all cases, operating radius shall govern capacity.

BOOM POINT ELEVATION: Boom point elevation is vertical distance from ground level to centerline of boom point shaft.

MACHINE EQUIPMENT: Machine equipped with MAX-ER 2000, 30 Ft. 9 in. crawlers, 48 in. treads, 28 Ft. retractable gantry, 130 Ft. mast, 10 part boom hoist reeving, boom support straps, 169,200 Lb. crane counterweight, two 30,000 Lb. carbody counterweights and wheeled counterweight as specified.

WARNING: Check amount of wheeled counterweight on machine before use of this chart. Refer to Counterweight Assembly.

Consult jib chart for jib capacities. Upper boom point cannot be used when jib is attached.

Deduct From Capacities When Jib Is Attached	
Jib Length	Jib No. 132
40 Ft.	6,400 Lbs.
60 Ft.	8,200 Lbs.
80 Ft.	10,300 Lbs.
100 Ft.	12,800 Lbs.
120 Ft.	15,300 Lbs.

Boom Catwalks Deduct
Deduct 800 Lbs. from capacities when boom catwalks are attached.




Liftcrane Boom Capacities

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 0 Lb. Thru 462,000 Lb. Wheeled Counterweight
 at 40 Ft. Position
 360 Degree Rating

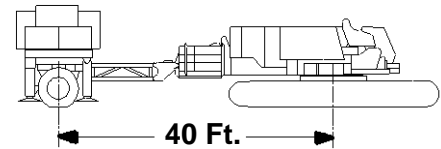

Maximum Boom and Jib Lengths Lifted Unassisted			
Over End of Blocked Crawlers		Over Side or End of Unblocked Crawlers	
Boom Length	Jib No. 132	Boom Length	Jib No. 132
0 Lb. Wheeled Counterweight			
220 Ft.	—	220 Ft.	—
200 Ft.	100 Ft.	200 Ft.	40 Ft.
120,000 Lb. Wheeled Counterweight			
320 Ft.	Not Allowed	300 Ft.	Not Allowed
240,000 Lb. Wheeled Counterweight			
400 Ft.	—	380 Ft.	—
380 Ft.	—	360 Ft.	—
360 Ft.	—	340 Ft.	(a) 80 Ft.
340 Ft.	120 Ft.	320 Ft.	120 Ft.
362,000 Lb. Wheeled Counterweight			
400 Ft.	Not Allowed	400 Ft.	Not Allowed
462,000 Lb. Wheeled Counterweight			
400 Ft.	—	400 Ft.	—
380 Ft.	—	380 Ft.	—
360 Ft.	100 Ft.	360 Ft.	100 Ft.
340 Ft.	120 Ft.	340 Ft.	120 Ft.
Load block, hook and weight ball on ground at start. (a) When equipped with boom catwalks, 80 Ft. jib on 340 Ft. boom cannot be raised.			




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

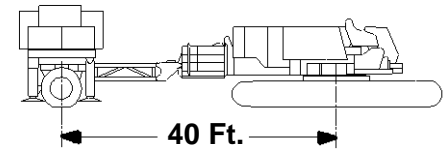

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	0 Lb. Wheeled Counterweight Boom Capacity Pounds	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
200 Ft. Boom								
38	81.4	207.5	281,400	387,500 *	472,700 *	559,300 *	600,000 *	38
40	80.8	207.1	259,300	367,500 *	448,600 *	531,100 *	598,700 *	40
45	79.3	206.2	215,700	324,800 *	397,300 *	471,100 *	531,500 *	45
50	77.9	205.1	183,400	290,300 *	355,900 *	422,500 *	477,200 *	50
55	76.4	203.9	158,500	261,900 *	321,700 *	382,500 *	432,400 *	55
60	74.9	202.5	138,700	238,000 *	293,000 *	348,900 *	394,700 *	60
65	73.4	201.0	122,500	215,900	268,600 *	320,300 *	362,700 *	65
70	71.9	199.4	109,100	194,600	247,500 *	295,700 *	335,100 *	70
75	70.4	197.6	97,800	176,600	229,200 *	274,200 *	311,100 *	75
80	68.9	195.7	88,100	161,200	213,100 *	255,400 *	290,000 *	80
85	67.3	193.6	79,800	147,800	198,800 *	238,700 *	271,400 *	85
90	65.7	191.3	72,500	136,200	186,100 *	223,800 *	254,700 *	90
95	64.1	188.9	66,000	126,000	174,700 *	210,500 *	239,800 *	95
100	62.5	186.3	60,300	116,900	164,400 *	198,400 *	226,300 *	100
105	60.9	183.5	55,200	108,700	155,100 *	187,500 *	214,000 *	105
110	59.2	180.5	50,600	101,400	146,500 *	177,500 *	202,900 *	110
115	57.5	177.3	46,400	94,800	138,800 *	168,400 *	192,700 *	115
120	55.8	173.9	42,600	88,800	131,300	160,000 *	183,300 *	120
125	54.0	170.3	39,200	83,300	123,900	152,300 *	174,700 *	125
130	52.2	166.4	36,000	78,200	117,200	145,200 *	166,700 *	130
135	50.4	162.3	33,100	73,600	111,000	138,500 *	159,300 *	135
140	48.4	157.9	30,400	69,300	105,300	132,400 *	152,400 *	140
145	46.5	153.2	27,900	65,400	100,000	126,600 *	146,000 *	145
150	44.4	148.1	25,500	61,700	95,000	121,200 *	139,900 *	150
155	42.3	142.7	23,400	58,300	90,400	116,200 *	134,300 *	155
160	40.1	136.8	21,300	55,000	86,100	111,500 *	129,000 *	160
165	37.8	130.4	19,400	52,000	82,100	107,000 *	124,000 *	165
170	35.3	123.4	17,600	49,200	78,300	102,800 *	119,300 *	170
175	32.7	115.8	15,900	46,600	74,800	98,800 *	114,900 *	175
180	29.9	107.3	14,300	44,000	71,400	95,000 *	110,700 *	180
185	26.8	97.7	12,800	41,700	68,300	91,500 *	106,700 *	185
190	23.3	86.6	11,300	39,400	65,300	88,100 *	102,900 *	190
195	19.2	73.1	10,000	37,200	62,400	84,800 *	99,200 *	195




Liftcrane Boom Capacities

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

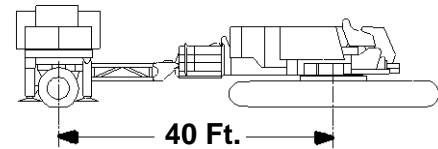


Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	0 Lb. Wheeled Counterweight Boom Capacity Pounds	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
220 Ft. Boom								
38	82.2	227.7	279,900	385,300 *	470,500 *	557,100 *	567,900 *	38
40	81.6	227.4	257,900	365,300 *	446,400 *	528,900 *	562,900 *	40
45	80.3	226.6	214,200	322,700 *	395,200 *	468,900 *	529,400 *	45
50	79.0	225.6	181,900	288,200 *	353,800 *	420,400 *	475,100 *	50
55	77.7	224.5	156,900	259,800 *	319,600 *	380,400 *	430,300 *	55
60	76.3	223.2	137,100	236,000 *	291,000 *	346,900 *	392,700 *	60
65	75.0	221.9	120,900	214,400	266,600 *	318,300 *	360,700 *	65
70	73.6	220.4	107,500	193,000	245,500 *	293,700 *	333,200 *	70
75	72.2	218.8	96,200	175,000	227,200 *	272,300 *	309,200 *	75
80	70.9	217.1	86,500	159,600	211,200 *	253,400 *	288,100 *	80
85	69.5	215.2	78,200	146,200	196,900 *	236,800 *	269,500 *	85
90	68.1	213.2	70,900	134,600	184,200 *	221,900 *	252,800 *	90
95	66.7	211.0	64,400	124,400	172,800 *	208,600 *	237,900 *	95
100	65.2	208.7	58,700	115,300	162,500 *	196,600 *	224,400 *	100
105	63.8	206.2	53,600	107,100	153,200 *	185,600 *	212,200 *	105
110	62.3	203.6	49,000	99,800	144,700 *	175,700 *	201,100 *	110
115	60.8	200.8	44,800	93,200	136,900 *	166,600 *	190,900 *	115
120	59.3	197.8	41,100	87,200	129,700	158,200 *	181,500 *	120
125	57.8	194.7	37,600	81,700	122,400	150,500 *	172,900 *	125
130	56.2	191.3	34,400	76,700	115,600	143,400 *	164,900 *	130
135	54.6	187.8	31,500	72,100	109,400	136,800 *	157,500 *	135
140	53.0	184.0	28,800	67,800	103,700	130,600 *	150,600 *	140
145	51.3	180.0	26,300	63,800	98,400	124,900 *	144,200 *	145
150	49.6	175.8	24,000	60,100	93,500	119,500 *	138,200 *	150
155	47.8	171.3	21,800	56,700	88,900	114,500 *	132,600 *	155
160	46.0	166.5	19,800	53,500	84,600	109,800 *	127,300 *	160
165	44.2	161.4	17,900	50,500	80,600	105,300 *	122,300 *	165
170	42.2	155.9	16,100	47,700	76,800	101,100 *	117,700 *	170
175	40.2	150.0	14,400	45,100	73,300	97,200 *	113,200 *	175
180	38.1	143.7	12,900	42,600	70,000	93,400 *	109,000 *	180
185	35.9	136.9	11,300	40,200	66,800	89,900 *	105,100 *	185
190	33.6	129.5	9,900	38,000	63,900	86,500 *	101,300 *	190
195	31.1	121.4	8,600	35,900	61,000	83,300 *	97,700 *	195
200	28.4	112.3	7,300	33,800	58,300	80,200 *	94,300 *	200
205	25.5	102.2	6,000	31,900	55,800	77,300 *	91,000 *	205
210	22.2	90.4	4,900	30,100	53,400	74,500 *	87,900 *	210

Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

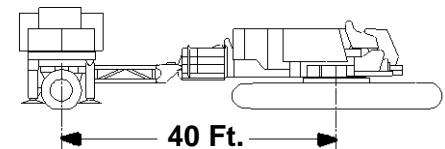

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
240 Ft. Boom							
38	82.8	247.9	382,500 *	467,700 *	515,300 *	515,300 *	38
40	82.3	247.6	362,500 *	443,600 *	510,300 *	510,300 *	40
45	81.1	246.9	319,900 *	392,400 *	466,200 *	505,300 *	45
50	79.9	246.0	285,500 *	351,000 *	417,700 *	472,300 *	50
55	78.7	245.0	257,100 *	316,900 *	377,700 *	427,500 *	55
60	77.5	243.8	233,200 *	288,200 *	344,100 *	390,000 *	60
65	76.3	242.6	212,400	263,800 *	315,600 *	358,000 *	65
70	75.0	241.3	190,900	242,800 *	291,000 *	330,500 *	70
75	73.8	239.8	172,900	224,500 *	269,600 *	306,500 *	75
80	72.5	238.2	157,400	208,500 *	250,800 *	285,400 *	80
85	71.3	236.5	144,100	194,200 *	234,100 *	266,800 *	85
90	70.0	234.7	132,400	181,500 *	219,200 *	250,100 *	90
95	68.7	232.7	122,100	170,200 *	205,900 *	235,200 *	95
100	67.4	230.7	113,000	159,900 *	193,900 *	221,800 *	100
105	66.1	228.4	104,900	150,600 *	183,000 *	209,500 *	105
110	64.8	226.1	97,600	142,100 *	173,000 *	198,400 *	110
115	63.5	223.6	90,900	134,300 *	163,900 *	188,200 *	115
120	62.1	220.9	84,900	127,200 *	155,600 *	178,900 *	120
125	60.7	218.1	79,400	120,100	147,900 *	170,300 *	125
130	59.4	215.2	74,400	113,300	140,800 *	162,300 *	130
135	57.9	212.0	69,700	107,100	134,100 *	154,900 *	135
140	56.5	208.7	65,500	101,400	128,000 *	148,000 *	140
145	55.1	205.2	61,500	96,100	122,300 *	141,600 *	145
150	53.6	201.5	57,800	91,100	116,900 *	135,600 *	150
155	52.1	197.7	54,400	86,600	111,900 *	130,000 *	155
160	50.5	193.6	51,200	82,300	107,200 *	124,700 *	160
165	48.9	189.2	48,200	78,300	102,700 *	119,800 *	165
170	47.3	184.6	45,400	74,500	98,500 *	115,100 *	170
175	45.7	179.8	42,700	71,000	94,600 *	110,700 *	175
180	43.9	174.6	40,200	67,600	90,900 *	106,500 *	180
185	42.2	169.1	37,900	64,500	87,300 *	102,500 *	185
190	40.3	163.3	35,600	61,500	83,900 *	98,800 *	190
195	38.4	157.0	33,500	58,700	80,700 *	95,200 *	195
200	36.4	150.3	31,500	56,000	77,700 *	91,800 *	200
205	34.3	143.1	29,600	53,500	74,800 *	88,500 *	205
210	32.1	135.2	27,800	51,100	72,000 *	85,400 *	210
220	27.2	117.2	24,400	46,600	66,800 *	79,600 *	220
230	21.2	94.1	21,300	42,400	62,000 *	74,300 *	230




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 0 Lb. Thru 462,000 Lb. Wheeled Counterweight
 at 40 Ft. Position
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

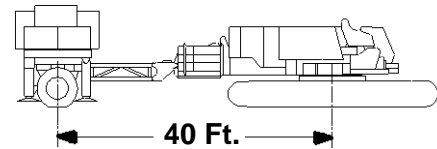

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
260 Ft. Boom							
40	82.9	267.8	362,000 *	443,100 *	447,300 *	447,300 *	40
45	81.8	267.1	319,400 *	391,900 *	442,300 *	442,300 *	45
50	80.7	266.3	285,000 *	350,600 *	417,200 *	437,300 *	50
55	79.6	265.4	256,600 *	316,400 *	377,200 *	427,100 *	55
60	78.5	264.3	232,800 *	287,800 *	343,700 *	389,500 *	60
65	77.3	263.2	212,500 *	263,400 *	315,100 *	357,600 *	65
70	76.2	262.0	191,100	242,400 *	290,600 *	330,000 *	70
75	75.1	260.6	173,000	224,100 *	269,200 *	306,100 *	75
80	73.9	259.2	157,500	208,100 *	250,300 *	285,000 *	80
85	72.8	257.6	144,100	193,800 *	233,700 *	266,400 *	85
90	71.6	256.0	132,400	181,200 *	218,800 *	249,700 *	90
95	70.4	254.2	122,200	169,800 *	205,500 *	234,800 *	95
100	69.2	252.3	113,000	159,500 *	193,500 *	221,400 *	100
105	68.1	250.2	104,900	150,200 *	182,600 *	209,200 *	105
110	66.9	248.1	97,500	141,700 *	172,700 *	198,100 *	110
115	65.7	245.8	90,900	133,900 *	163,600 *	187,900 *	115
120	64.4	243.4	84,900	126,800 *	155,200 *	178,500 *	120
125	63.2	240.9	79,400	120,000	147,500 *	169,900 *	125
130	61.9	238.2	74,300	113,300	140,400 *	162,000 *	130
135	60.7	235.4	69,700	107,000	133,800 *	154,600 *	135
140	59.4	232.5	65,400	101,300	127,700 *	147,700 *	140
145	58.1	229.4	61,400	96,000	121,900 *	141,300 *	145
150	56.8	226.1	57,700	91,100	116,600 *	135,300 *	150
155	55.5	222.7	54,300	86,500	111,600 *	129,700 *	155
160	54.1	219.0	51,100	82,200	106,900 *	124,400 *	160
165	52.7	215.2	48,100	78,200	102,400 *	119,500 *	165
170	51.3	211.2	45,300	74,400	98,300 *	114,800 *	170
175	49.9	207.0	42,600	70,900	94,300 *	110,400 *	175
180	48.4	202.6	40,100	67,500	90,600 *	106,200 *	180
185	46.9	197.9	37,800	64,400	87,000 *	102,200 *	185
190	45.3	193.0	35,600	61,400	83,700 *	98,500 *	190
195	43.7	187.8	33,500	58,600	80,500 *	94,900 *	195
200	42.1	182.3	31,500	56,000	77,500 *	91,500 *	200
205	40.4	176.5	29,600	53,400	74,600 *	88,300 *	205
210	38.7	170.3	27,700	51,000	71,800 *	85,200 *	210
220	34.9	156.6	24,400	46,500	66,600 *	79,400 *	220
230	30.8	140.7	21,300	42,400	61,900 *	74,200 *	230
240	26.1	121.8	18,400	38,700	57,500 *	69,300 *	240
250	20.3	97.7	15,800	35,200	53,500 *	64,700 *	250




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

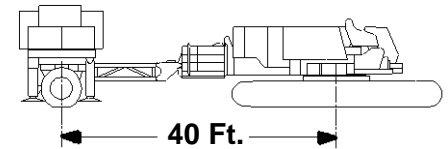

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
280 Ft. Boom							
45	82.4	287.3	319,400 *	373,500 *	373,500 *	373,500 *	45
50	81.4	286.6	285,000 *	350,600 *	370,300 *	370,300 *	50
55	80.3	285.7	256,700 *	316,500 *	358,600 *	358,600 *	55
60	79.3	284.8	232,800 *	287,800 *	343,800 *	347,400 *	60
65	78.3	283.7	212,600 *	263,500 *	315,200 *	336,200 *	65
70	77.2	282.6	191,600	242,500 *	290,600 *	325,700 *	70
75	76.2	281.3	173,500	224,200 *	269,200 *	306,200 *	75
80	75.1	280.0	158,000	208,200 *	250,500 *	285,100 *	80
85	74.0	278.6	144,600	194,000 *	233,800 *	266,500 *	85
90	73.0	277.0	132,900	181,300 *	219,000 *	249,900 *	90
95	71.9	275.4	122,600	169,900 *	205,700 *	235,000 *	95
100	70.8	273.6	113,500	159,600 *	193,600 *	221,500 *	100
105	69.7	271.8	105,300	150,300 *	182,800 *	209,300 *	105
110	68.6	269.8	98,000	141,900 *	172,800 *	198,200 *	110
115	67.5	267.7	91,300	134,100 *	163,700 *	188,000 *	115
120	66.4	265.5	85,300	127,000 *	155,400 *	178,700 *	120
125	65.3	263.2	79,800	120,400 *	147,700 *	170,100 *	125
130	64.1	260.8	74,700	113,700	140,600 *	162,100 *	130
135	63.0	258.3	70,100	107,500	134,000 *	154,800 *	135
140	61.8	255.6	65,800	101,700	127,900 *	147,900 *	140
145	60.6	252.8	61,800	96,400	122,100 *	141,500 *	145
150	59.4	249.8	58,200	91,500	116,800 *	135,500 *	150
155	58.2	246.7	54,700	86,900	111,800 *	129,900 *	155
160	57.0	243.5	51,500	82,600	107,100 *	124,600 *	160
165	55.8	240.1	48,500	78,600	102,700 *	119,700 *	165
170	54.5	236.5	45,700	74,800	98,500 *	115,000 *	170
175	53.3	232.8	43,100	71,300	94,500 *	110,600 *	175
180	52.0	228.9	40,600	68,000	90,800 *	106,400 *	180
185	50.6	224.8	38,200	64,800	87,300 *	102,500 *	185
190	49.3	220.5	36,000	61,900	83,900 *	98,800 *	190
195	47.9	216.0	33,900	59,000	80,800 *	95,200 *	195
200	46.5	211.3	31,900	56,400	77,700 *	91,800 *	200
205	45.1	206.3	30,000	53,900	74,800 *	88,600 *	205
210	43.6	201.1	28,200	51,400	72,100 *	85,500 *	210
220	40.5	189.7	24,800	47,000	66,900 *	79,800 *	220
230	37.2	177.1	21,700	42,900	62,200 *	74,500 *	230
240	33.6	162.7	18,900	39,100	57,900 *	69,600 *	240
250	29.6	146.0	16,300	35,700	53,900 *	65,200 *	250
260	25.1	126.2	13,900	32,500	50,100 *	61,000 *	260
270	19.5	101.1	11,600	29,500	46,600 *	57,100 *	270




Liftcrane Boom Capacities

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

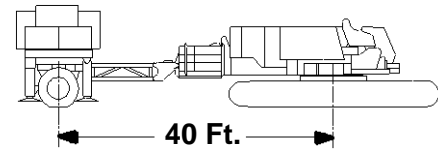

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
300 Ft. Boom							
45	82.9	307.5	314,400 *	314,400 *	314,400 *	314,400 *	45
50	82.0	306.8	284,300 *	313,300 *	313,300 *	313,300 *	50
55	81.0	306.0	255,900 *	312,200 *	312,200 *	312,200 *	55
60	80.0	305.1	232,100 *	287,100 *	311,100 *	311,100 *	60
65	79.0	304.2	211,800 *	262,700 *	309,900 *	309,900 *	65
70	78.1	303.1	191,400	241,800 *	289,900 *	300,300 *	70
75	77.1	301.9	173,300	223,500 *	268,500 *	290,900 *	75
80	76.1	300.7	157,700	207,500 *	249,700 *	281,900 *	80
85	75.1	299.4	144,300	193,300 *	233,100 *	265,800 *	85
90	74.1	297.9	132,600	180,600 *	218,300 *	249,200 *	90
95	73.1	296.4	122,300	169,200 *	205,000 *	234,300 *	95
100	72.1	294.8	113,100	159,000 *	193,000 *	220,800 *	100
105	71.1	293.1	105,000	149,700 *	182,100 *	208,600 *	105
110	70.1	291.3	97,600	141,200 *	172,200 *	197,500 *	110
115	69.1	289.3	90,900	133,400 *	163,100 *	187,400 *	115
120	68.0	287.3	84,900	126,300 *	154,700 *	178,000 *	120
125	67.0	285.2	79,400	119,700 *	147,100 *	169,400 *	125
130	66.0	283.0	74,300	113,300	140,000 *	161,500 *	130
135	64.9	280.6	69,700	107,100	133,400 *	154,100 *	135
140	63.8	278.2	65,400	101,300	127,200 *	147,300 *	140
145	62.8	275.6	61,400	96,000	121,500 *	140,900 *	145
150	61.7	272.9	57,700	91,100	116,200 *	134,900 *	150
155	60.6	270.1	54,300	86,500	111,200 *	129,300 *	155
160	59.5	267.1	51,100	82,200	106,500 *	124,000 *	160
165	58.4	264.1	48,100	78,200	102,000 *	119,100 *	165
170	57.2	260.8	45,300	74,400	97,900 *	114,400 *	170
175	56.1	257.5	42,600	70,900	93,900 *	110,000 *	175
180	54.9	254.0	40,100	67,500	90,200 *	105,800 *	180
185	53.7	250.3	37,800	64,400	86,700 *	101,900 *	185
190	52.5	246.5	35,600	61,400	83,400 *	98,200 *	190
195	51.3	242.5	33,500	58,600	80,200 *	94,600 *	195
200	50.1	238.3	31,500	56,000	77,200 *	91,200 *	200
205	48.8	233.9	29,600	53,400	74,300 *	88,000 *	205
210	47.5	229.4	27,800	51,000	71,500 *	84,900 *	210
220	44.8	219.6	24,400	46,600	66,400 *	79,200 *	220
230	42.0	208.8	21,300	42,500	61,700 *	74,000 *	230
240	39.0	196.9	18,500	38,700	57,400 *	69,100 *	240
250	35.9	183.5	15,900	35,300	53,400 *	64,700 *	250
260	32.4	168.5	13,600	32,100	49,700 *	60,500 *	260
270	28.6	151.1	11,300	29,200	46,200 *	56,700 *	270
280	24.2	130.4	9,200	26,400	43,000 *	53,100 *	280
290	18.8	104.3	7,300	23,900	39,900 *	49,700 *	290




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

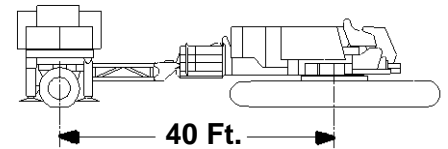

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	120,000 Lb. Wheeled Counterweight Boom Capacity Pounds	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
320 Ft. Boom							
50	82.5	327.0	280,300 *	280,900 *	280,900 *	280,900 *	50
55	81.6	326.3	251,900 *	278,900 *	278,900 *	278,900 *	55
60	80.7	325.4	228,100 *	276,900 *	276,900 *	276,900 *	60
65	79.7	324.5	207,800 *	258,700 *	274,900 *	274,900 *	65
70	78.8	323.5	188,100	237,800 *	272,900 *	272,900 *	70
75	77.9	322.5	169,900	219,500 *	264,500 *	270,900 *	75
80	77.0	321.3	154,400	203,500 *	245,800 *	262,000 *	80
85	76.1	320.1	140,900	189,300 *	229,100 *	253,600 *	85
90	75.1	318.7	129,200	176,600 *	214,300 *	245,200 *	90
95	74.2	317.3	118,800	165,200 *	201,000 *	230,300 *	95
100	73.3	315.8	109,600	155,000 *	189,000 *	216,900 *	100
105	72.3	314.2	101,400	145,700 *	178,100 *	204,700 *	105
110	71.4	312.5	94,100	137,200 *	168,200 *	193,600 *	110
115	70.4	310.7	87,400	129,500 *	159,100 *	183,400 *	115
120	69.5	308.9	81,300	122,300 *	150,800 *	174,100 *	120
125	68.5	306.9	75,800	115,800 *	143,100 *	165,500 *	125
130	67.6	304.8	70,700	109,700	136,000 *	157,500 *	130
135	66.6	302.7	66,100	103,500	129,400 *	150,200 *	135
140	65.6	300.4	61,800	97,700	123,300 *	143,300 *	140
145	64.6	298.0	57,800	92,400	117,600 *	136,900 *	145
150	63.6	295.5	54,100	87,400	112,200 *	130,900 *	150
155	62.6	292.9	50,700	82,800	107,200 *	125,300 *	155
160	61.6	290.2	47,400	78,500	102,500 *	120,100 *	160
165	60.6	287.4	44,400	74,500	98,100 *	115,100 *	165
170	59.5	284.5	41,600	70,700	93,900 *	110,500 *	170
175	58.5	281.4	39,000	67,200	90,000 *	106,100 *	175
180	57.4	278.2	36,500	63,900	86,300 *	101,900 *	180
185	56.3	274.9	34,100	60,700	82,800 *	98,000 *	185
190	55.2	271.4	31,900	57,800	79,400 *	94,200 *	190
195	54.1	267.8	29,800	54,900	76,300 *	90,700 *	195
200	53.0	264.0	27,800	52,300	73,200 *	87,300 *	200
205	51.9	260.1	25,900	49,700	70,400 *	84,100 *	205
210	50.7	256.0	24,100	47,300	67,600 *	81,000 *	210
220	48.3	247.3	20,700	42,900	62,500 *	75,300 *	220
230	45.9	237.9	17,700	38,800	57,800 *	70,100 *	230
240	43.3	227.5	14,800	35,100	53,500 *	65,200 *	240
250	40.6	216.2	12,300	31,600	49,500 *	60,800 *	250
260	37.7	203.7	9,900	28,500	45,800 *	56,700 *	260
270	34.7	189.8	7,700	25,500	42,200 *	52,800 *	270
280	31.3	174.1	5,600	22,800	38,500 *	49,300 *	280
290	27.6	156.0		20,100 *	35,000 *	45,900 *	290
300	23.4	134.5		17,200 *	31,700 *	42,800 *	300
310	18.2	107.5		14,600 *	28,500 *	39,800 *	310




Liftcrane Boom Capacities

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

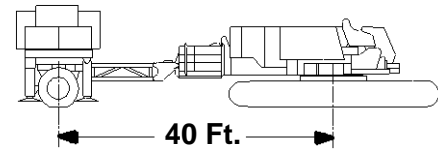


Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
340 Ft. Boom						
50	82.9	347.2	241,000 *	241,000 *	241,000 *	50
55	82.1	346.5	240,900 *	240,900 *	240,900 *	55
60	81.2	345.7	239,800 *	239,800 *	239,800 *	60
65	80.4	344.9	238,700 *	238,700 *	238,700 *	65
70	79.5	343.9	237,000 *	237,600 *	237,600 *	70
75	78.6	342.9	218,800 *	236,500 *	236,500 *	75
80	77.8	341.8	202,700 *	235,400 *	235,400 *	80
85	76.9	340.7	188,500 *	228,400 *	233,400 *	85
90	76.0	339.4	175,900 *	213,600 *	225,900 *	90
95	75.2	338.1	164,500 *	200,300 *	218,400 *	95
100	74.3	336.7	154,300 *	188,300 *	211,400 *	100
105	73.4	335.2	145,000 *	177,400 *	204,000 *	105
110	72.5	333.6	136,500 *	167,500 *	192,900 *	110
115	71.6	331.9	128,800 *	158,400 *	182,700 *	115
120	70.7	330.2	121,700 *	150,100 *	173,400 *	120
125	69.9	328.4	115,100 *	142,400 *	164,800 *	125
130	68.9	326.4	109,000 *	135,300 *	156,900 *	130
135	68.0	324.4	103,000	128,700 *	149,500 *	135
140	67.1	322.3	97,300	122,600 *	142,600 *	140
145	66.2	320.1	91,900	116,900 *	136,300 *	145
150	65.3	317.8	87,000	111,600 *	130,300 *	150
155	64.3	315.4	82,400	106,600 *	124,700 *	155
160	63.4	312.9	78,100	101,900 *	119,400 *	160
165	62.4	310.3	74,100	97,500 *	114,500 *	165
170	61.5	307.5	70,300	93,300 *	109,800 *	170
175	60.5	304.7	66,800	89,400 *	105,400 *	175
180	59.5	301.8	63,400	85,700 *	101,300 *	180
185	58.6	298.7	60,300	82,200 *	97,400 *	185
190	57.6	295.5	57,300	78,800 *	93,600 *	190
195	56.5	292.2	54,500	75,600 *	90,100 *	195
200	55.5	288.8	51,800	72,600 *	86,700 *	200
205	54.5	285.2	49,300	69,800 *	83,500 *	205
210	53.4	281.5	46,900	67,000 *	80,400 *	210
220	51.3	273.7	42,400	61,900 *	74,700 *	220
230	49.1	265.2	38,300	57,200 *	69,500 *	230
240	46.8	256.0	34,600	52,900 *	64,700 *	240
250	44.4	246.1	31,200	48,900 *	60,200 *	250
260	41.9	235.2	28,000	45,300 *	56,100 *	260
270	39.3	223.4	25,100	41,500 *	52,300 *	270
280	36.6	210.3	22,300 *	37,800 *	48,700 *	280
290	33.6	195.8	19,400 *	34,300 *	45,400 *	290
300	30.4	179.5	16,600 *	31,000 *	42,300 *	300
310	26.8	160.7	14,000 *	27,900 *	39,400 *	310
320	22.7	138.5	11,500 *	25,000 *	36,100 *	320
330	17.7	110.6	9,100 *	22,200 *	33,000 *	330

Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

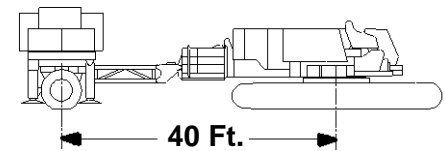

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
360 Ft. Boom						
55	82.5	366.7	205,900 *	205,900 *	205,900 *	55
60	81.7	366.0	202,400 *	202,400 *	202,400 *	60
65	80.9	365.2	199,600 *	199,600 *	199,600 *	65
70	80.1	364.3	192,300 *	192,300 *	192,300 *	70
75	79.3	363.3	185,200 *	185,200 *	185,200 *	75
80	78.5	362.3	178,100 *	178,100 *	178,100 *	80
85	77.6	361.2	171,400 *	171,400 *	171,400 *	85
90	76.8	360.0	164,700 *	164,700 *	164,700 *	90
95	76.0	358.8	158,200 *	158,200 *	158,200 *	95
100	75.2	357.5	151,900 *	151,900 *	151,900 *	100
105	74.4	356.1	144,800 *	145,600 *	145,600 *	105
110	73.5	354.6	136,400 *	139,800 *	139,800 *	110
115	72.7	353.0	128,600 *	133,900 *	133,900 *	115
120	71.9	351.4	121,500 *	128,800 *	128,800 *	120
125	71.0	349.6	115,000 *	127,900 *	127,900 *	125
130	70.2	347.8	108,900 *	127,000 *	127,000 *	130
135	69.3	345.9	103,100	126,100 *	126,100 *	135
140	68.5	344.0	97,300	122,500 *	125,200 *	140
145	67.6	341.9	92,000	116,800 *	124,300 *	145
150	66.7	339.8	87,100	111,500 *	123,400 *	150
155	65.9	337.5	82,500	106,500 *	122,500 *	155
160	65.0	335.2	78,200	101,800 *	119,300 *	160
165	64.1	332.7	74,100	97,400 *	114,400 *	165
170	63.2	330.2	70,400	93,200 *	109,700 *	170
175	62.3	327.6	66,800	89,300 *	105,400 *	175
180	61.4	324.9	63,500	85,600 *	101,200 *	180
185	60.5	322.0	60,300	82,100 *	97,300 *	185
190	59.6	319.1	57,400	78,700 *	93,500 *	190
195	58.6	316.1	54,500	75,600 *	90,000 *	195
200	57.7	312.9	51,900	72,600 *	86,600 *	200
205	56.7	309.6	49,400	69,700 *	83,400 *	205
210	55.8	306.2	46,900	67,000 *	80,400 *	210
220	53.8	299.0	42,500	61,800 *	74,700 *	220
230	51.8	291.3	38,400	57,200 *	69,400 *	230
240	49.7	283.0	34,700	52,900 *	64,600 *	240
250	47.6	274.1	31,300	48,900 *	60,200 *	250
260	45.4	264.4	28,100	45,200 *	56,100 *	260
270	43.1	254.0	25,200	41,500 *	52,300 *	270
280	40.7	242.7	22,300 *	37,800 *	48,800 *	280
290	38.2	230.3	19,400 *	34,300 *	45,400 *	290
300	35.5	216.7	16,600 *	31,100 *	42,300 *	300
310	32.6	201.7	14,000 *	28,000 *	39,400 *	310
320	29.5	184.7	11,600 *	25,100 *	36,200 *	320
330	26.0	165.3	9,200 *	22,400 *	33,100 *	330
340	22.0	142.4	7,000 *	19,800 *	30,200 *	340
350	17.1	113.5	4,900 *	17,300 *	27,400 *	350




Liftcrane Boom Capacities

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

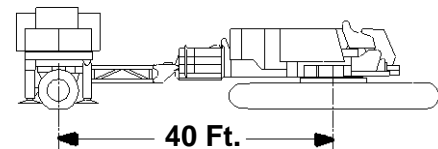

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
380 Ft. Boom						
55	82.9	386.9	177,800 *	177,800 *	177,800 *	55
60	82.1	386.2	175,800 *	175,800 *	175,800 *	60
65	81.4	385.4	173,800 *	173,800 *	173,800 *	65
70	80.6	384.6	171,800 *	171,800 *	171,800 *	70
75	79.8	383.7	168,700 *	168,700 *	168,700 *	75
80	79.1	382.7	162,300 *	162,300 *	162,300 *	80
85	78.3	381.7	155,900 *	155,900 *	155,900 *	85
90	77.5	380.6	149,800 *	149,800 *	149,800 *	90
95	76.8	379.4	143,700 *	143,700 *	143,700 *	95
100	76.0	378.2	137,900 *	137,900 *	137,900 *	100
105	75.2	376.8	132,100 *	132,100 *	132,100 *	105
110	74.4	375.4	131,300 *	131,300 *	131,300 *	110
115	73.6	374.0	127,800 *	130,500 *	130,500 *	115
120	72.8	372.4	120,700 *	129,700 *	129,700 *	120
125	72.1	370.8	114,100 *	128,900 *	128,900 *	125
130	71.3	369.1	108,100 *	128,100 *	128,100 *	130
135	70.5	367.3	102,400 *	127,300 *	127,300 *	135
140	69.7	365.4	96,700	121,700 *	126,500 *	140
145	68.8	363.5	91,400	116,000 *	125,700 *	145
150	68.0	361.5	86,400	110,600 *	124,900 *	150
155	67.2	359.4	81,800	105,600 *	123,700 *	155
160	66.4	357.2	77,500	100,900 *	118,500 *	160
165	65.6	354.9	73,500	96,500 *	113,600 *	165
170	64.7	352.6	69,700	92,400 *	108,900 *	170
175	63.9	350.1	66,200	88,500 *	104,500 *	175
180	63.0	347.6	62,800	84,800 *	100,400 *	180
185	62.2	344.9	59,700	81,200 *	96,500 *	185
190	61.3	342.2	56,700	77,900 *	92,700 *	190
195	60.5	339.4	53,900	74,800 *	89,200 *	195
200	59.6	336.4	51,200	71,800 *	85,800 *	200
205	58.7	333.4	48,700	68,900 *	82,600 *	205
210	57.8	330.2	46,300	66,200 *	79,600 *	210
220	56.0	323.6	41,800	61,100 *	73,900 *	220
230	54.2	316.5	37,800	56,400 *	68,600 *	230
240	52.3	308.9	34,000	52,100 *	63,900 *	240
250	50.3	300.8	30,600	48,100 *	59,400 *	250
260	48.3	292.1	27,500	44,400 *	55,300 *	260
270	46.3	282.7	24,400 *	40,400 *	51,500 *	270
280	44.1	272.6	21,300 *	36,700 *	48,000 *	280
290	41.9	261.7	18,400 *	33,300 *	44,700 *	290
300	39.6	249.9	15,600 *	30,100 *	41,600 *	300
310	37.1	237.0	13,100 *	27,000 *	38,500 *	310
320	34.5	223.0	10,600 *	24,200 *	35,300 *	320
330	31.7	207.3	8,300 *	21,500 *	32,200 *	330
340	28.7	189.8	6,200 *	18,900 *	29,400 *	340
350	25.3	169.8	4,100 *	16,500 *	26,600 *	350
360	21.4	146.1		14,100 *	24,000 *	360
370	16.7	116.4		11,900 *	21,500 *	370




Liftcrane Boom Capacities

Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
0 Lb. Thru 462,000 Lb. Wheeled Counterweight
at 40 Ft. Position
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

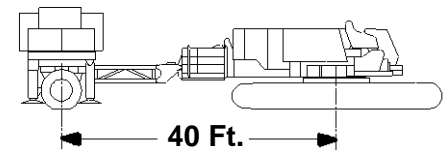

Oper. Rad. Feet	Boom Ang. Deg.	Boom Point Elev. Feet	240,000 Lb. Wheeled Counterweight Boom Capacity Pounds	362,000 Lb. Wheeled Counterweight Boom Capacity Pounds	462,000 Lb. Wheeled Counterweight Boom Capacity Pounds	Oper. Rad. Feet
400 Ft. Boom						
60	82.5	406.4	148,000 *	148,000 *	148,000 *	60
65	81.8	405.7	141,900 *	141,900 *	141,900 *	65
70	81.1	404.9	135,800 *	135,800 *	135,800 *	70
75	80.4	404.0	129,900 *	129,900 *	129,900 *	75
80	79.6	403.1	124,100 *	124,100 *	124,100 *	80
85	78.9	402.1	118,300 *	118,300 *	118,300 *	85
90	78.2	401.1	112,800 *	112,800 *	112,800 *	90
95	77.4	400.0	107,300 *	107,300 *	107,300 *	95
100	76.7	398.8	106,800 *	106,800 *	106,800 *	100
105	76.0	397.5	106,300 *	106,300 *	106,300 *	105
110	75.2	396.2	105,800 *	105,800 *	105,800 *	110
115	74.5	394.8	105,300 *	105,300 *	105,300 *	115
120	73.7	393.3	104,800 *	104,800 *	104,800 *	120
125	73.0	391.8	104,300 *	104,300 *	104,300 *	125
130	72.2	390.2	103,800 *	103,800 *	103,800 *	130
135	71.5	388.5	102,100 *	103,300 *	103,300 *	135
140	70.7	386.8	96,600	102,800 *	102,800 *	140
145	70.0	384.9	91,200	102,300 *	102,300 *	145
150	69.2	383.0	86,300	101,800 *	101,800 *	150
155	68.4	381.1	81,700	101,300 *	101,300 *	155
160	67.6	379.0	77,300	100,600 *	100,800 *	160
165	66.9	376.9	73,300	96,200 *	100,300 *	165
170	66.1	374.6	69,500	92,100 *	99,800 *	170
175	65.3	372.3	66,000	88,200 *	99,300 *	175
180	64.5	369.9	62,700	84,400 *	98,800 *	180
185	63.7	367.5	59,500	80,900 *	96,100 *	185
190	62.9	364.9	56,500	77,600 *	92,400 *	190
195	62.1	362.3	53,700	74,500 *	88,900 *	195
200	61.3	359.5	51,100	71,500 *	85,500 *	200
205	60.4	356.7	48,500	68,600 *	82,300 *	205
210	59.6	353.7	46,100	65,900 *	79,300 *	210
220	57.9	347.6	41,600	60,800 *	73,600 *	220
230	56.2	341.0	37,600	56,100 *	68,400 *	230
240	54.5	334.0	33,900	51,800 *	63,600 *	240
250	52.7	326.5	30,400	47,900 *	59,200 *	250
260	50.8	318.5	27,300	44,000 *	55,100 *	260
270	49.0	309.9	24,100 *	40,100 *	51,300 *	270
280	47.0	300.8	21,000 *	36,400 *	47,800 *	280
290	45.0	291.0	18,100 *	33,000 *	44,500 *	290
300	42.9	280.5	15,300 *	29,800 *	41,400 *	300
310	40.8	269.2	12,800 *	26,700 *	38,200 *	310
320	38.5	256.9	10,400 *	23,900 *	35,000 *	320
330	36.1	243.6	8,100 *	21,200 *	32,000 *	330
340	33.6	229.0	5,900 *	18,700 *	29,100 *	340
350	30.9	212.9		16,200 *	26,400 *	350
360	27.9	194.8		14,000 *	23,800 *	360
370	24.6	174.2		11,800 *	21,400 *	370
380	20.8	149.8		9,700 *	19,000 *	380
390	16.2	119.2		7,600 *	16,700 *	390