


Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled Counterweight at 15.2m Position
360 Degree Rating

Maximum Operating Wind Speeds
14 m/s thru 73.2m Boom
10 m/s 79.2m thru 91.4m Boom
7 m/s 97.5m thru 109.7m Boom

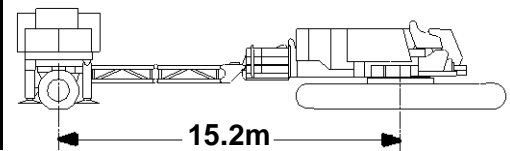

LIFTING CAPACITIES: Lifting capacities for various boom lengths and operating radii are for freely suspended loads and are calculated to comply with EN 13000, ISO 4305 and include factors based on a 4.0 degree tipping angle. Capacities based on structural competence are denoted by an asterisk (*).

Wheeled counterweight must be attached to support beam and MAX-ER mode must be selected to operate. Swing and travel (forward or side crawl) requires proper position of counterweight wheels when contacting ground. Exit MAX-ER mode before operating without wheeled counterweight.

Upper boom point capacity for liftcrane service with single part whip line is 12 560 kg or 25 130 kg with two part whip line. When luffing hoist for 22 mm wire rope is used, capacity is 9 070 kg with single part whip line or 18 140 kg with two part whip line. In all cases, upper boom point capacities cannot exceed those listed for main boom capacities.

Weight of all load blocks, hooks, weight ball, slings, etc., beneath boom point sheaves, is considered part of main boom load. Reeved hoist line included in boom weight. Boom is not to be lowered beyond radii where combined weights are greater than rated capacity. Where no capacity is shown, operation is not intended or approved.

OPERATING CONDITIONS: Machine to operate on a firm uniformly supporting surface with gantry in intermediate position and mast up. Refer to boom rigging **No. 194041**, Wire Rope Specification chart **No. 8215-A** and Counterweight Arrangement chart **No. 8412-A**. Crane operator judgment must be used to allow for dynamic load effects of swinging, hoisting or lowering, travel, wind conditions, as well as adverse operating conditions and physical machine depreciation. Refer to operators manual for operating guidelines.

WIND CONDITIONS: Machine may be operated in winds stated in Maximum Operating Wind Speed table provided crane operator judgment is used to allow for wind effect on lifted load and other considerations noted on capacity chart are followed. Wind will have a considerable effect on load with a large "sail area" and must be compensated for accordingly by reducing load ratings, reducing operating speeds or by a combination of both. Wind speed to be measured at boom point elevation.

Operation is not permitted when wind is above conditions stated in Maximum Operating Wind Speed table. Park crane (upper inline with crawlers) with load block on ground or secured and position boom at 70 degrees. Lower boom onto blocking at ground level and haul in boom hoist wire rope just enough to tension mast straps when wind is above 22 m/s. Lower mast onto blocking at ground level when wind is above 34 m/s.

MACHINE TRAVEL: Machine to travel on a firm, level, and uniformly supporting surface and boom within boom angle range shown in capacity chart. *Travel with 100 percent of rated load prohibited.* Travel restricted to 90 percent of rated capacity with speed not to exceed 0.4 m/s. Refer to Maximum Allowable Travel Specification chart **No. 9228-A**.

MAX PERMISSIBLE SLEWING SPEED: Slewing operation with working load shall not exceed 0.4 m/s as measured at the operating radius. The amount of time to brake or start slewing a working load shall not be less than 2.5 seconds.

OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation to center of vertical hoist line or load block. Boom angle is angle between horizontal and centerline of boom butt and inserts, and is an indication of operating radius. In all cases, operating radius shall govern capacity.

BOOM POINT ELEVATION: Boom point elevation is vertical distance from ground level to centerline of boom point shaft.

MACHINE EQUIPMENT: Machine equipped with MAX-ER 2000, 9 373 mm crawlers, 1 219 mm treads, 8 534 mm retractable gantry, 39.6m mast, 10 part boom hoist reeving, boom support straps, 76 750 kg crane counterweight, two 13 610 kg carbody counterweights and wheeled counterweight as specified.

WARNING: Check amount of wheeled counterweight on machine before use of this chart. Refer to Counterweight Assembly.


Boom Catwalks Deduct
Deduct 350 kg from capacities when boom catwalks are attached.

Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled Counterweight at 15.2m Position
360 Degree Rating

Maximum Operating Wind Speeds	
14 m/s thru 73.2m Boom	
10 m/s 79.2m thru 91.4m Boom	
7 m/s 97.5m thru 109.7m Boom	

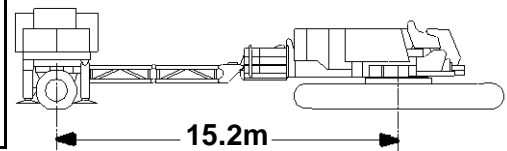


Maximum Boom Lengths Lifted Unassisted		
Over End of Blocked Crawlers	Over End of Unblocked Crawlers	Over Side of Crawlers
Boom Length	Boom Length	Boom Length
0 kg Wheeled Counterweight		
(a) 67.1m 61.0m	54.9m	61.0m
54 430 kg Wheeled Counterweight		
(b) 91.4m 85.3m	79.2m	79.2m
108 860 kg Wheeled Counterweight		
(b) 109.7m 103.6m	103.6m	103.6m
164 200 kg Wheeled Counterweight		
109.7m	109.7m	109.7m
209 560 kg Wheeled Counterweight		
109.7m	109.7m	109.7m
Load block, hook and weight ball on ground at start. (a) Upper boom point must be removed. Machine must be equipped with optional upperworks jacking cylinders and boom must be rigged with one hoist lead line. (b) Raising reserve is less than 10% tip weight.		

Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled
Counterweight at 15.2m Position
360 Degree Rating

**Maximum Operating
Wind Speeds**
14 m/s thru 73.2m Boom
10 m/s 79.2m thru 91.4m Boom
7 m/s 97.5m thru 109.7m Boom

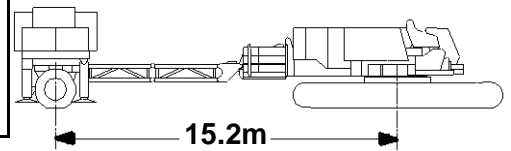

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	0 kg Wheeled Counterweight Boom Capacity Kilograms	54 430 kg Wheeled Counterweight Boom Capacity Kilograms	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
36.6m (120 Ft.) Boom								
7.6	82.8	39.2					450 000 * ¹	7.6
8.0	82.2	39.1	179 300	288 800 *	362 600 *	408 200 *	408 200 *	8.0
9.0	80.6	38.9	154 900	256 800 *	322 800 *	389 700 *	408 200 *	9.0
10.0	79.0	38.7	135 900	230 800 *	290 700 *	351 500 *	399 800 *	10.0
11.0	77.4	38.5	120 600	209 400 *	264 000 *	319 700 *	365 200 *	11.0
12.0	75.7	38.2	107 900	191 300 *	241 700 *	292 900 *	334 800 *	12.0
14.0	72.5	37.5	88 400	162 500 *	206 000 *	250 200 *	286 400 *	14.0
16.0	69.1	36.7	74 000	140 700 *	179 000 *	217 800 *	249 700 *	16.0
18.0	65.6	35.8	62 900	123 600 *	157 800 *	192 500 *	220 900 *	18.0
20.0	62.1	34.7	53 500	107 500	140 700 *	172 100 *	197 800 *	20.0
22.0	58.4	33.5	45 500	93 600	126 700 *	155 300 *	178 700 *	22.0
24.0	54.5	32.0	39 100	82 500	114 900 *	141 200 *	162 700 *	24.0
26.0	50.4	30.4	33 900	73 500	105 000 *	129 300 *	149 200 *	26.0
28.0	46.1	28.4	29 600	66 000	96 500 *	119 100 *	137 600 *	28.0
30.0	41.3	26.2	26 000	59 600	89 100 *	110 200 *	127 500 *	30.0
32.0	36.1	23.4	23 000	54 200	82 700 *	102 500 *	118 800 *	32.0
34.0	29.9	20.1	20 400	49 600	76 300	95 700 *	107 600 *	34.0
36.0	22.2	15.5	18 300	45 700	70 700	89 800 *	93 500 *	36.0
42.7m (140 Ft.) Boom								
8.5	82.6	45.2	154 500	269 200 *	338 700 *	398 700 *	398 700 *	8.5
9.0	82.0	45.1	145 200	255 500 *	321 600 *	386 300 *	398 700 *	9.0
10.0	80.6	45.0	127 600	229 300 *	289 200 *	350 000 *	393 500 *	10.0
11.0	79.2	44.7	113 500	207 900 *	262 600 *	318 200 *	363 800 *	11.0
12.0	77.8	44.5	101 800	189 800 *	240 200 *	291 400 *	333 300 *	12.0
14.0	75.1	43.9	83 400	161 100 *	204 600 *	248 800 *	285 000 *	14.0
16.0	72.2	43.3	69 800	139 300 *	177 500 *	216 400 *	248 200 *	16.0
18.0	69.3	42.5	59 200	122 000	156 300 *	191 000 *	219 500 *	18.0
20.0	66.4	41.6	50 900	106 100	139 300 *	170 600 *	196 300 *	20.0
22.0	63.4	40.6	43 900	92 200	125 200 *	153 800 *	177 200 *	22.0
24.0	60.3	39.4	37 700	81 100	113 500 *	139 700 *	161 200 *	24.0
26.0	57.1	38.1	32 400	72 000	103 500 *	127 800 *	147 700 *	26.0
28.0	53.7	36.6	28 000	64 400	95 000 *	117 600 *	136 100 *	28.0
30.0	50.2	35.0	24 400	58 000	87 600 *	108 700 *	126 000 *	30.0
32.0	46.5	33.0	21 300	52 500	81 100	100 900 *	117 200 *	32.0
34.0	42.6	30.9	18 600	47 800	74 500	94 100 *	109 400 *	34.0
36.0	38.2	28.3	16 300	43 700	68 800	88 100 *	102 500 *	36.0
38.0	33.4	25.4	14 400	40 200	63 800	82 700 *	96 400 *	38.0
40.0	27.8	21.7	12 700	37 100	59 500	77 900 *	90 700 *	40.0
42.0	20.7	16.8	11 400	34 600	55 700	73 700 *	82 000 *	42.0


¹ Note: Requires additional rigging components.

Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled
Counterweight at 15.2m Position
360 Degree Rating

**Maximum Operating
Wind Speeds**
14 m/s thru 73.2m Boom
10 m/s 79.2m thru 91.4m Boom
7 m/s 97.5m thru 109.7m Boom

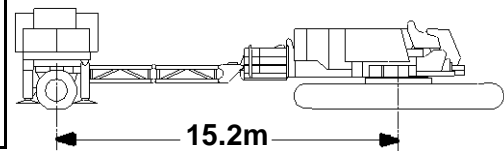


Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	0 kg Wheeled Counterweight Boom Capacity Kilograms	54 430 kg Wheeled Counterweight Boom Capacity Kilograms	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
48.8m (160 Ft.) Boom								
9.1	82.8	51.3	133 800	250 000 *	315 100 *	358 800 *	358 800 *	9.1
10.0	81.8	51.2	120 400	228 100 *	288 000 *	351 500 *	358 800 *	10.0
11.0	80.6	51.0	107 300	206 500	261 400 *	317 000 *	358 100 *	11.0
12.0	79.4	50.8	96 400	187 500	239 000 *	290 200 *	332 700 *	12.0
14.0	77.0	50.3	79 200	157 500	203 400 *	247 600 *	283 800 *	14.0
16.0	74.5	49.7	66 200	134 900	176 400 *	215 200 *	247 100 *	16.0
18.0	72.0	49.0	56 100	117 400	155 200 *	189 900 *	218 400 *	18.0
20.0	69.5	48.3	48 100	103 400	138 100 *	169 500 *	195 200 *	20.0
22.0	67.0	47.4	41 500	91 400	124 100 *	152 700 *	176 100 *	22.0
24.0	64.4	46.4	36 000	80 100	112 300 *	138 600 *	160 100 *	24.0
26.0	61.7	45.3	31 400	71 000	102 400 *	126 600 *	146 600 *	26.0
28.0	58.9	44.1	27 000	63 300	93 700 *	116 400 *	134 900 *	28.0
30.0	56.1	42.8	23 200	56 800	86 300 *	107 400 *	124 700 *	30.0
32.0	53.1	41.2	20 000	51 300	79 800 *	99 700 *	115 900 *	32.0
34.0	50.1	39.6	17 300	46 500	73 200	92 800 *	108 100 *	34.0
36.0	46.8	37.7	14 900	42 400	67 400	86 700 *	101 100 *	36.0
38.0	43.4	35.6	12 900	38 700	62 300	81 200 *	95 000 *	38.0
40.0	39.8	33.2	11 100	35 500	57 800	76 300 *	89 400 *	40.0
42.0	35.8	30.4	9 500	32 700	53 800	71 900 *	84 400 *	42.0
44.0	31.3	27.2	8 100	30 200	50 300	68 000 *	79 900 *	44.0
46.0	26.1	23.3	7 000	28 000	47 100	64 400 *	75 800 *	46.0
48.0	19.6	18.1	6 100	26 100	44 400	61 300 *	70 900 *	48.0

Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled
Counterweight at 15.2m Position
360 Degree Rating

Maximum Operating Wind Speeds	
14 m/s	thru 73.2m Boom
10 m/s	79.2m thru 91.4m Boom
7 m/s	97.5m thru 109.7m Boom

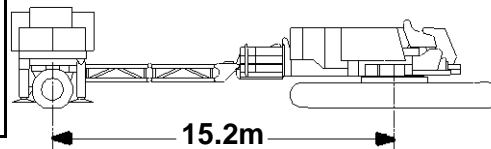

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	0 kg Wheeled Counterweight Boom Capacity Kilograms	54 430 kg Wheeled Counterweight Boom Capacity Kilograms	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
54.9m (180 Ft.) Boom								
9.8	83.0	57.4	117 000	223 900	294 300 *	323 300 *	323 300 *	9.8
10.0	82.7	57.3	113 800	218 300	287 200 *	323 300 *	323 300 *	10.0
11.0	81.6	57.2	101 600	197 000	260 400 *	316 300 *	323 300 *	11.0
12.0	80.6	57.0	91 400	179 300	238 000 *	289 200 *	323 300 *	12.0
14.0	78.4	56.6	75 200	151 200	202 400 *	246 600 *	283 100 *	14.0
16.0	76.3	56.1	62 900	129 800	175 400 *	214 300 *	246 100 *	16.0
18.0	74.1	55.5	53 300	113 100	154 300 *	189 000 *	217 400 *	18.0
20.0	71.9	54.8	45 600	99 600	137 200 *	168 600 *	194 300 *	20.0
22.0	69.7	54.0	39 200	88 500	123 100 *	151 700 *	175 100 *	22.0
24.0	67.4	53.2	33 800	79 100	111 400 *	137 600 *	159 200 *	24.0
26.0	65.1	52.2	29 400	70 100	101 400 *	125 700 *	145 600 *	26.0
28.0	62.7	51.2	25 500	62 400	92 800 *	115 400 *	133 900 *	28.0
30.0	60.3	50.0	22 200	55 900	85 400 *	106 500 *	123 800 *	30.0
32.0	57.9	48.8	19 100	50 400	78 800 *	98 700 *	114 900 *	32.0
34.0	55.3	47.4	16 300	45 500	72 200	91 800 *	107 100 *	34.0
36.0	52.7	45.8	13 900	41 300	66 300	85 600 *	100 100 *	36.0
38.0	49.9	44.1	11 800	37 600	61 200	80 200 *	93 900 *	38.0
40.0	47.1	42.3	9 900	34 300	56 600	75 200 *	88 300 *	40.0
42.0	44.1	40.2	8 300	31 400	52 600	70 800 *	83 200 *	42.0
44.0	40.9	37.9	6 800	28 800	48 900	66 800 *	78 700 *	44.0
46.0	37.5	35.3	5 600	26 500	45 700	63 100 *	74 500 *	46.0
48.0	33.8	32.4		24 500	42 800	59 800 *	70 700 *	48.0
50.0	29.6	28.9		22 700	40 200	56 800 *	67 300 *	50.0
52.0	24.8	24.8		21 000	37 900	54 100 *	64 100 *	52.0
54.0	18.7	19.3		19 700	35 800	51 600 *	60 900 *	54.0




Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled Counterweight at 15.2m Position
360 Degree Rating

Maximum Operating Wind Speeds
14 m/s thru 73.2m Boom
10 m/s 79.2m thru 91.4m Boom
7 m/s 97.5m thru 109.7m Boom

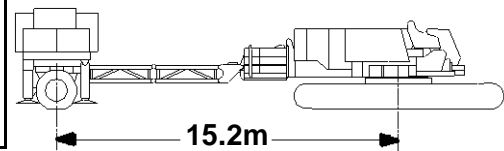


Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	0 kg Wheeled Counterweight Boom Capacity Kilograms	54 430 kg Wheeled Counterweight Boom Capacity Kilograms	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
61.0m (200 Ft.) Boom								
11.0	82.5	63.3	96 300	188 500	259 900 *	291 400 *	291 400 *	11.0
12.0	81.5	63.2	86 500	171 500	236 800 *	285 900 *	291 400 *	12.0
14.0	79.6	62.8	71 100	144 900	201 200 *	245 400 *	284 200 *	14.0
16.0	77.7	62.3	59 500	124 600	174 200 *	213 100 *	244 900 *	16.0
18.0	75.8	61.8	50 200	108 600	153 000 *	187 700 *	216 200 *	18.0
20.0	73.8	61.2	42 800	95 600	136 000 *	167 300 *	193 000 *	20.0
22.0	71.8	60.6	36 600	85 000	121 900 *	150 400 *	173 900 *	22.0
24.0	69.8	59.8	31 400	75 900	110 100 *	136 300 *	157 900 *	24.0
26.0	67.8	59.0	27 000	68 300	100 100 *	124 400 *	144 300 *	26.0
28.0	65.7	58.1	23 200	61 200	91 500 *	114 100 *	132 600 *	28.0
30.0	63.6	57.0	19 900	54 600	84 000 *	105 200 *	122 500 *	30.0
32.0	61.4	55.9	17 100	49 000	77 500 *	97 300 *	113 500 *	32.0
34.0	59.3	54.7	14 500	44 200	70 800	90 400 *	105 700 *	34.0
36.0	57.0	53.4	12 300	39 900	64 900	84 200 *	98 700 *	36.0
38.0	54.7	52.0	10 300	36 200	59 800	78 700 *	92 500 *	38.0
40.0	52.3	50.4	8 500	32 900	55 100	73 800 *	86 800 *	40.0
42.0	49.9	48.7	6 800	29 900	51 000	69 300 *	81 800 *	42.0
44.0	47.3	46.9	5 300	27 300	47 400	65 200 *	77 100 *	44.0
46.0	44.6	44.9		24 900	44 000	61 500 *	72 900 *	46.0
48.0	41.8	42.6		22 800	41 000	58 200 *	69 100 *	48.0
50.0	38.8	40.1		20 800	38 300	55 100 *	65 600 *	50.0
52.0	35.6	37.4		19 100	35 900	52 300 *	62 300 *	52.0
54.0	32.1	34.2		17 500	33 700	49 700 *	59 400 *	54.0
56.0	28.2	30.6		16 200	31 700	47 300 *	56 700 *	56.0
58.0	23.6	26.2		15 000	29 900	45 100	54 200 *	58.0

Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled
Counterweight at 15.2m Position
360 Degree Rating

**Maximum Operating
Wind Speeds**
14 m/s thru 73.2m Boom
10 m/s 79.2m thru 91.4m Boom
7 m/s 97.5m thru 109.7m Boom

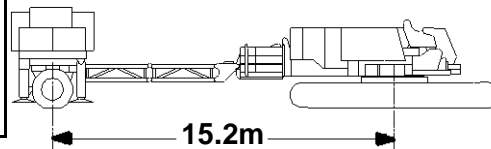

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	0 kg Wheeled Counterweight Boom Capacity Kilograms	54 430 kg Wheeled Counterweight Boom Capacity Kilograms	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
67.1m (220 Ft.) Boom								
11.6	82.7	69.4	86 100	171 000	245 200 *	263 000 *	263 000 *	11.6
12.0	82.3	69.4	82 500	164 800	236 400 *	263 000 *	263 000 *	12.0
14.0	80.6	69.0	68 100	139 700	200 700 *	246 400 *	260 400 *	14.0
16.0	78.8	68.6	56 900	120 400	173 600 *	212 500 *	247 700 *	16.0
18.0	77.1	68.1	48 100	105 100	152 500 *	187 200 *	215 600 *	18.0
20.0	75.3	67.6	40 900	92 600	135 400 *	166 700 *	192 400 *	20.0
22.0	73.5	67.0	34 900	82 300	121 300 *	149 900 *	173 300 *	22.0
24.0	71.7	66.3	29 900	73 600	109 500 *	135 800 *	157 300 *	24.0
26.0	69.9	65.6	25 600	66 200	99 500 *	123 800 *	143 700 *	26.0
28.0	68.1	64.7	21 900	59 800	90 900 *	113 500 *	132 000 *	28.0
30.0	66.2	63.8	18 700	54 100	83 500 *	104 600 *	121 900 *	30.0
32.0	64.3	62.9	15 800	48 500	76 900 *	96 700 *	113 000 *	32.0
34.0	62.3	61.8	13 400	43 700	70 300	89 800 *	105 100 *	34.0
36.0	60.4	60.7	11 100	39 400	64 400	83 600 *	98 100 *	36.0
38.0	58.4	59.4	9 200	35 600	59 200	78 100 *	91 800 *	38.0
40.0	56.3	58.1	7 400	32 300	54 500	73 100 *	86 200 *	40.0
42.0	54.2	56.6	5 800	29 300	50 400	68 600 *	81 100 *	42.0
44.0	52.0	55.0		26 600	46 700	64 600 *	76 400 *	44.0
46.0	49.8	53.3		24 200	43 300	60 800 *	72 200 *	46.0
48.0	47.4	51.5		22 000	40 300	57 400 *	68 300 *	48.0
50.0	45.0	49.5		20 000	37 500	54 300 *	64 800 *	50.0
52.0	42.5	47.3		18 300	35 000	51 500 *	61 500 *	52.0
54.0	39.8	44.9		16 600	32 700	48 800 *	58 500 *	54.0
56.0	37.0	42.3		15 100	30 600	46 300	55 700 *	56.0
58.0	34.0	39.4		13 800	28 700	43 900	53 100 *	58.0
60.0	30.7	36.0		12 600	27 000	41 600	50 800 *	60.0
62.0	27.0	32.2		11 500	25 400	39 600	48 600 *	62.0
64.0	22.7	27.6		10 500	24 000	37 700	46 600 *	64.0




Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 0 kg Thru 209 560 kg Wheeled
 Counterweight at 15.2m Position
 360 Degree Rating

**Maximum Operating
Wind Speeds**
 14 m/s thru 73.2m Boom
 10 m/s 79.2m thru 91.4m Boom
 7 m/s 97.5m thru 109.7m Boom

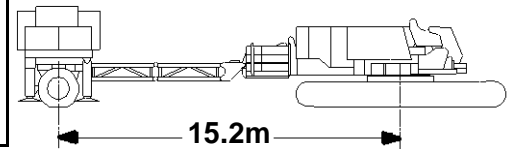


Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	54 430 kg Wheeled Counterweight Boom Capacity Kilograms	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
73.2m (240 Ft.) Boom							
12.2	82.8	75.5	155 200	227 000	238 100 *	238 100 *	12.2
14.0	81.4	75.2	134 100	197 700	230 700 *	231 500 *	14.0
16.0	79.8	74.8	115 700	172 200	213 500 *	229 300 *	16.0
18.0	78.2	74.4	101 000	151 400 *	186 000 *	215 400 *	18.0
20.0	76.6	73.9	89 000	134 200 *	165 600 *	191 300 *	20.0
22.0	74.9	73.4	79 000	120 100 *	148 700 *	172 100 *	22.0
24.0	73.3	72.7	70 600	108 400 *	134 600 *	156 100 *	24.0
26.0	71.6	72.1	63 400	98 400 *	122 600 *	142 600 *	26.0
28.0	70.0	71.3	57 100	89 700 *	112 300 *	130 800 *	28.0
30.0	68.3	70.5	51 700	82 200 *	103 400 *	120 700 *	30.0
32.0	66.6	69.6	46 900	75 700 *	95 500 *	111 800 *	32.0
34.0	64.8	68.7	42 500	69 200	88 600 *	103 900 *	34.0
36.0	63.1	67.7	38 200	63 300	82 400 *	96 900 *	36.0
38.0	61.3	66.6	34 400	58 000	76 900 *	90 600 *	38.0
40.0	59.5	65.4	31 100	53 400	71 900 *	84 900 *	40.0
42.0	57.6	64.1	28 100	49 200	67 400 *	79 800 *	42.0
44.0	55.7	62.7	25 300	45 400	63 300 *	75 100 *	44.0
46.0	53.8	61.2	22 900	42 000	59 500 *	70 900 *	46.0
48.0	51.8	59.6	20 700	39 000	56 100 *	67 000 *	48.0
50.0	49.7	57.9	18 700	36 200	53 000 *	63 400 *	50.0
52.0	47.6	56.1	16 800	33 600	50 100 *	60 100 *	52.0
54.0	45.4	54.1	15 200	31 300	47 400 *	57 100 *	54.0
56.0	43.1	52.0	13 700	29 100	44 900	54 300 *	56.0
58.0	40.7	49.7	12 200	27 200	42 300	51 700 *	58.0
60.0	38.2	47.1	10 900	25 400	40 000	49 200 *	60.0
62.0	35.5	44.3	9 800	23 700	37 800	47 000 *	62.0
64.0	32.6	41.3	8 700	22 100	35 800	44 900 *	64.0
66.0	29.4	37.8	7 700	20 800	34 000	43 000 *	66.0
68.0	25.9	33.8	6 900	19 500	32 300	41 100 *	68.0
70.0	21.9	29.0	6 100	18 300	30 800	39 500 *	70.0

Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled
Counterweight at 15.2m Position
360 Degree Rating

Maximum Operating Wind Speeds	
14 m/s	thru 73.2m Boom
10 m/s	79.2m thru 91.4m Boom
7 m/s	97.5m thru 109.7m Boom

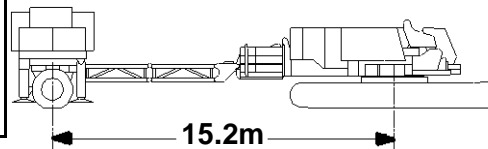

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	54 430 kg Wheeled Counterweight Boom Capacity Kilograms	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
79.2m (260 Ft.) Boom							
13.7	82.2	81.4	132 200	195 300	207 800 *	207 800 *	13.7
14.0	82.0	81.4	129 500	191 600	207 500 *	207 500 *	14.0
16.0	80.6	81.0	111 800	167 000	204 100 *	205 700 *	16.0
18.0	79.1	80.6	97 700	147 600	186 700 *	203 500 *	18.0
20.0	77.6	80.2	86 200	131 600	165 000 *	191 100 *	20.0
22.0	76.1	79.7	76 600	118 300	148 200 *	171 600 *	22.0
24.0	74.6	79.1	68 400	107 000	134 100 *	155 600 *	24.0
26.0	73.1	78.5	61 400	97 300	122 100 *	142 000 *	26.0
28.0	71.6	77.8	55 300	88 800	111 800 *	130 300 *	28.0
30.0	70.0	77.1	50 000	81 500	102 800 *	120 100 *	30.0
32.0	68.5	76.3	45 300	75 000	94 900 *	111 200 *	32.0
34.0	66.9	75.4	41 100	68 800	88 000 *	103 300 *	34.0
36.0	65.3	74.5	37 400	62 800	81 800 *	96 300 *	36.0
38.0	63.7	73.5	34 000	57 500	76 300 *	90 000 *	38.0
40.0	62.1	72.4	30 500	52 900	71 300 *	84 300 *	40.0
42.0	60.4	71.3	27 500	48 700	66 800 *	79 200 *	42.0
44.0	58.7	70.0	24 800	44 900	62 700 *	74 500 *	44.0
46.0	57.0	68.7	22 300	41 400	58 900 *	70 300 *	46.0
48.0	55.2	67.3	20 100	38 400	55 500 *	66 400 *	48.0
50.0	53.4	65.8	18 100	35 600	52 300 *	62 800 *	50.0
52.0	51.6	64.2	16 200	33 000	49 400 *	59 500 *	52.0
54.0	49.7	62.5	14 500	30 600	46 700 *	56 400 *	54.0
56.0	47.7	60.7	12 900	28 400	44 200	53 600 *	56.0
58.0	45.7	58.8	11 500	26 400	41 600	51 000 *	58.0
60.0	43.6	56.7	10 200	24 600	39 200	48 500 *	60.0
62.0	41.4	54.4	8 900	22 900	37 000	46 200 *	62.0
64.0	39.1	51.9	7 800	21 300	35 000	44 000 *	64.0
66.0	36.7	49.3	6 800	19 800	33 000	42 100 *	66.0
68.0	34.1	46.3	5 900	18 500	31 300	40 200 *	68.0
70.0	31.4	43.1	5 000	17 200	29 700	38 500 *	70.0
74.0	25.0	35.3		15 000	26 700	35 300 *	74.0




Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled Counterweight at 15.2m Position
360 Degree Rating

Maximum Operating Wind Speeds
 14 m/s thru 73.2m Boom
 10 m/s 79.2m thru 91.4m Boom
 7 m/s 97.5m thru 109.7m Boom

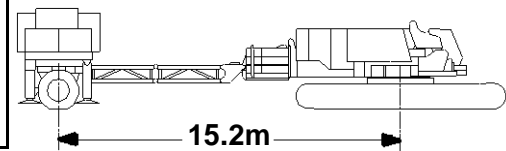

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	54 430 kg Wheeled Counterweight Boom Capacity Kilograms	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
85.3m (280 Ft.) Boom							
13.7	82.8	87.6	127 000	175 600 *	175 600 *	175 600 *	13.7
14.0	82.6	87.5	124 400	174 500	175 600 *	175 600 *	14.0
16.0	81.3	87.2	107 500	163 100	175 600 *	175 600 *	16.0
18.0	79.9	86.9	94 000	142 800	175 600 *	175 600 *	18.0
20.0	78.5	86.4	82 900	127 500	164 300 *	175 600 *	20.0
22.0	77.1	86.0	73 600	114 600	147 200 *	170 300 *	22.0
24.0	75.8	85.5	65 700	103 600	133 000 *	154 700 *	24.0
26.0	74.4	84.9	58 900	94 200	121 100 *	141 000 *	26.0
28.0	73.0	84.3	52 900	86 000	110 700 *	129 300 *	28.0
30.0	71.5	83.6	47 700	78 800	101 800 *	119 100 *	30.0
32.0	70.1	82.8	43 100	72 400	93 900 *	110 200 *	32.0
34.0	68.7	82.1	39 000	66 800	87 000 *	102 300 *	34.0
36.0	67.2	81.2	35 400	61 700	80 800 *	95 200 *	36.0
38.0	65.7	80.3	32 000	56 600	75 200 *	88 900 *	38.0
40.0	64.2	79.3	29 100	51 900	70 200 *	83 200 *	40.0
42.0	62.7	78.3	26 400	47 600	65 700 *	78 100 *	42.0
44.0	61.2	77.2	23 700	43 800	61 600 *	73 500 *	44.0
46.0	59.6	76.0	21 300	40 400	57 800 *	69 200 *	46.0
48.0	58.0	74.7	19 000	37 300	54 400 *	65 300 *	48.0
50.0	56.4	73.4	17 000	34 500	51 200 *	61 700 *	50.0
52.0	54.8	72.0	15 100	31 900	48 300 *	58 300 *	52.0
54.0	53.1	70.5	13 400	29 500	45 600 *	55 300 *	54.0
56.0	51.4	68.8	11 800	27 300	43 000	52 400 *	56.0
58.0	49.6	67.1	10 300	25 200	40 400	49 700 *	58.0
60.0	47.8	65.3	9 000	23 300	38 000	47 300 *	60.0
62.0	45.9	63.4	7 700	21 600	35 800	45 000 *	62.0
64.0	44.0	61.3	6 500	20 000	33 700	42 800 *	64.0
66.0	42.0	59.1	5 500	18 500	31 700	40 800 *	66.0
68.0	39.9	56.7		17 100	29 900	38 900 *	68.0
70.0	37.7	54.1		15 800	28 200	37 100 *	70.0
74.0	32.9	48.3		13 400	25 100	33 900 *	74.0
78.0	27.4	41.1		11 400	22 500	31 000 *	78.0
82.0	20.5	31.7		9 700	20 200	28 500 *	82.0


Liftcrane Boom Capacities

MAX-ER 2000

On 2250

Boom No. 79 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 0 kg Thru 209 560 kg Wheeled
 Counterweight at 15.2m Position
 360 Degree Rating

**Maximum Operating
Wind Speeds**
 14 m/s thru 73.2m Boom
 10 m/s 79.2m thru 91.4m Boom
 7 m/s 97.5m thru 109.7m Boom

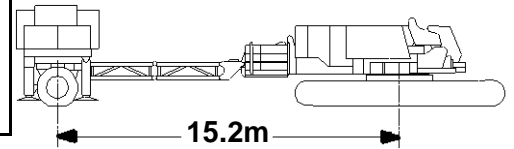

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	54 430 kg Wheeled Counterweight Boom Capacity Kilograms	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
91.4m (300 Ft.) Boom							
15.2	82.3	93.5	109 000	150 500 *	150 500 *	150 500 *	15.2
16.0	81.8	93.4	103 600	149 700	150 500 *	150 500 *	16.0
18.0	80.6	93.1	90 400	139 200	150 500 *	150 500 *	18.0
20.0	79.3	92.7	79 700	123 400	150 500 *	150 500 *	20.0
22.0	78.0	92.2	70 600	110 900	145 800 *	150 500 *	22.0
24.0	76.7	91.8	63 000	100 300	132 100 *	150 500 *	24.0
26.0	75.4	91.2	56 400	91 100	120 000 *	139 900 *	26.0
28.0	74.1	90.6	50 600	83 200	109 700 *	128 200 *	28.0
30.0	72.8	90.0	45 500	76 100	100 700 *	118 000 *	30.0
32.0	71.5	89.3	41 000	70 000	92 900 *	109 100 *	32.0
34.0	70.2	88.6	37 000	64 400	85 900 *	101 200 *	34.0
36.0	68.8	87.8	33 400	59 400	79 700 *	94 200 *	36.0
38.0	67.4	87.0	30 200	54 900	74 200 *	87 900 *	38.0
40.0	66.1	86.1	27 200	50 800	69 200 *	82 200 *	40.0
42.0	64.7	85.1	24 600	46 600	64 700 *	77 100 *	42.0
44.0	63.3	84.1	22 100	42 800	60 500 *	72 400 *	44.0
46.0	61.9	83.0	19 900	39 300	56 800 *	68 100 *	46.0
48.0	60.4	81.9	17 800	36 200	53 300 *	64 200 *	48.0
50.0	58.9	80.7	15 900	33 400	50 200 *	60 600 *	50.0
52.0	57.5	79.4	14 000	30 700	47 200 *	57 300 *	52.0
54.0	55.9	78.0	12 200	28 400	44 500 *	54 200 *	54.0
56.0	54.4	76.6	10 600	26 200	41 900	51 300 *	56.0
58.0	52.8	75.1	9 200	24 100	39 300	48 700 *	58.0
60.0	51.2	73.5	7 800	22 200	36 800	46 200 *	60.0
62.0	49.6	71.7	6 600	20 500	34 600	43 900 *	62.0
64.0	47.9	69.9	5 400	18 800	32 500	41 700 *	64.0
66.0	46.1	68.0		17 300	30 600	39 700 *	66.0
68.0	44.3	66.0		15 900	28 700	37 800 *	68.0
70.0	42.5	63.8		14 600	27 000	36 000 *	70.0
74.0	38.5	58.9		12 200	23 900	32 700 *	74.0
78.0	34.2	53.3		10 100	21 200	29 800 *	78.0
82.0	29.3	46.6		8 300	18 800	27 100 *	82.0
86.0	23.5	38.2		6 700	16 800	24 700 *	86.0




Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled
Counterweight at 15.2m Position
360 Degree Rating

**Maximum Operating
Wind Speeds**
14 m/s thru 73.2m Boom
10 m/s 79.2m thru 91.4m Boom
7 m/s 97.5m thru 109.7m Boom

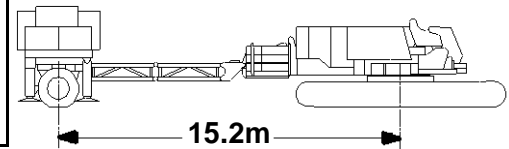


Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
97.5m (320 Ft.) Boom						
15.2	82.8	99.7	129 200 *	129 200 *	129 200 *	15.2
16.0	82.4	99.6	129 200 *	129 200 *	129 200 *	16.0
18.0	81.2	99.3	129 200 *	129 200 *	129 200 *	18.0
20.0	80.0	98.9	119 700	129 200 *	129 200 *	20.0
22.0	78.8	98.5	107 500	129 200 *	129 200 *	22.0
24.0	77.6	98.0	97 200	128 800 *	129 200 *	24.0
26.0	76.4	97.5	88 300	119 100 *	129 200 *	26.0
28.0	75.1	97.0	80 500	108 800 *	126 600 *	28.0
30.0	73.9	96.4	73 700	99 800 *	117 300 *	30.0
32.0	72.7	95.8	67 600	92 000 *	108 200 *	32.0
34.0	71.4	95.1	62 200	85 000 *	100 300 *	34.0
36.0	70.2	94.4	57 300	78 800 *	93 300 *	36.0
38.0	68.9	93.6	52 900	73 200 *	87 000 *	38.0
40.0	67.7	92.8	48 900	68 200 *	81 300 *	40.0
42.0	66.4	91.9	45 200	63 700 *	76 100 *	42.0
44.0	65.1	90.9	41 900	59 600 *	71 500 *	44.0
46.0	63.8	89.9	38 400	55 800 *	67 200 *	46.0
48.0	62.4	88.9	35 300	52 300 *	63 200 *	48.0
50.0	61.1	87.8	32 500	49 100 *	59 600 *	50.0
52.0	59.7	86.6	29 800	46 200 *	56 300 *	52.0
54.0	58.4	85.4	27 400	43 500 *	53 200 *	54.0
56.0	56.9	84.0	25 200	40 900	50 300 *	56.0
58.0	55.5	82.7	23 100	38 300	47 600 *	58.0
60.0	54.1	81.2	21 200	35 800	45 200 *	60.0
62.0	52.6	79.7	19 500	33 600	42 900 *	62.0
64.0	51.1	78.1	17 800	31 500	40 600 *	64.0
66.0	49.5	76.3	16 200	29 500	38 600 *	66.0
68.0	47.9	74.5	14 800	27 600	36 700 *	68.0
70.0	46.3	72.6	13 400	25 900	34 900 *	70.0
74.0	42.9	68.4	11 000	22 800	31 600 *	74.0
78.0	39.3	63.7	8 800	20 000	28 500 *	78.0
82.0	35.3	58.3	7 000	17 500	25 500 *	82.0
86.0	30.9	52.0	5 300	15 300	22 900 *	86.0
90.0	25.8	44.3		13 400	20 600 *	90.0
94.0	19.5	34.3		11 700	18 500 *	94.0

Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled
Counterweight at 15.2m Position
360 Degree Rating

Maximum Operating Wind Speeds	
14 m/s thru 73.2m Boom	
10 m/s 79.2m thru 91.4m Boom	
7 m/s 97.5m thru 109.7m Boom	

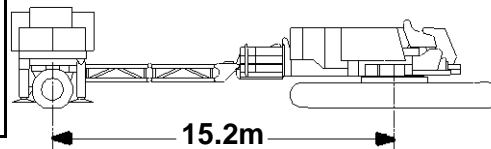


Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
103.6m (340 Ft.) Boom						
16.8	82.4	105.6	112 000 *	112 000 *	112 000 *	16.8
18.0	81.7	105.4	112 000 *	112 000 *	112 000 *	18.0
20.0	80.6	105.1	111 500	112 000 *	112 000 *	20.0
22.0	79.4	104.7	105 400	112 000 *	112 000 *	22.0
24.0	78.3	104.3	94 700	112 000 *	112 000 *	24.0
26.0	77.2	103.8	86 100	111 900 *	112 000 *	26.0
28.0	76.0	103.3	78 500	109 200 *	112 000 *	28.0
30.0	74.9	102.8	71 800	99 400 *	110 700 *	30.0
32.0	73.7	102.2	65 900	91 500 *	105 200 *	32.0
34.0	72.6	101.5	60 600	84 600 *	99 300 *	34.0
36.0	71.4	100.9	55 800	78 400 *	92 900 *	36.0
38.0	70.2	100.1	51 500	72 800 *	86 500 *	38.0
40.0	69.0	99.4	47 500	67 800 *	80 800 *	40.0
42.0	67.9	98.5	44 000	63 200 *	75 700 *	42.0
44.0	66.6	97.7	40 700	59 100 *	71 000 *	44.0
46.0	65.4	96.7	37 600	55 400 *	66 700 *	46.0
48.0	64.2	95.8	34 800	51 900 *	62 800 *	48.0
50.0	63.0	94.7	32 100	48 700 *	59 200 *	50.0
52.0	61.7	93.6	29 500	45 800 *	55 800 *	52.0
54.0	60.4	92.5	27 000	43 000 *	52 800 *	54.0
56.0	59.1	91.3	24 800	40 500	49 800 *	56.0
58.0	57.8	90.0	22 700	37 900	47 200 *	58.0
60.0	56.5	88.7	20 800	35 400	44 700 *	60.0
62.0	55.1	87.3	19 000	33 200	42 300 *	62.0
64.0	53.8	85.8	17 300	31 000	40 100 *	64.0
66.0	52.4	84.3	15 800	29 000	38 100 *	66.0
68.0	51.0	82.7	14 300	27 200	36 100 *	68.0
70.0	49.5	80.9	12 900	25 400	34 300 *	70.0
74.0	46.5	77.2	10 500	22 200	30 900 *	74.0
78.0	43.3	73.1	8 200	19 400	27 700 *	78.0
82.0	39.9	68.5	6 300	16 800	24 700 *	82.0
86.0	36.3	63.2		14 600	22 000 *	86.0
90.0	32.2	57.2		12 500	19 600 *	90.0
94.0	27.7	50.0		10 700 *	17 400 *	94.0
98.0	22.3	41.1		9 000 *	15 400 *	98.0

Liftcrane Boom Capacities

MAX-ER 2000 On 2250

Boom No. 79 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
0 kg Thru 209 560 kg Wheeled
Counterweight at 15.2m Position
360 Degree Rating

**Maximum Operating
Wind Speeds**
14 m/s thru 73.2m Boom
10 m/s 79.2m thru 91.4m Boom
7 m/s 97.5m thru 109.7m Boom

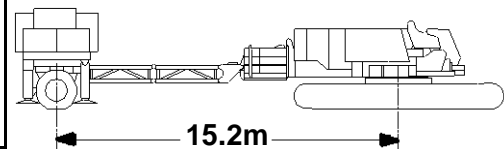

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	108 860 kg Wheeled Counterweight Boom Capacity Kilograms	164 200 kg Wheeled Counterweight Boom Capacity Kilograms	209 560 kg Wheeled Counterweight Boom Capacity Kilograms	Oper. Rad. Meters
109.7m (360 Ft.) Boom						
16.8	82.8	111.8	97 200 *	97 200 *	97 200 *	16.8
18.0	82.2	111.6	97 200 *	97 200 *	97 200 *	18.0
20.0	81.1	111.3	97 200 *	97 200 *	97 200 *	20.0
22.0	80.0	110.9	96 900	97 200 *	97 200 *	22.0
24.0	79.0	110.5	91 800	97 200 *	97 200 *	24.0
26.0	77.9	110.1	82 700	97 200 *	97 200 *	26.0
28.0	76.8	109.6	75 400	97 200 *	97 200 *	28.0
30.0	75.8	109.1	68 900	96 300 *	97 200 *	30.0
32.0	74.7	108.5	63 000	90 100 *	97 200 *	32.0
34.0	73.6	107.9	57 800	83 100 *	92 800 *	34.0
36.0	72.5	107.3	53 100	76 900 *	87 800 *	36.0
38.0	71.4	106.6	48 900	71 300 *	83 300 *	38.0
40.0	70.3	105.9	45 000	66 400 *	79 100 *	40.0
42.0	69.1	105.1	41 500	61 800 *	74 300 *	42.0
44.0	68.0	104.3	38 300	57 700 *	69 600 *	44.0
46.0	66.9	103.4	35 300	53 900 *	65 300 *	46.0
48.0	65.7	102.5	32 600	50 400 *	61 300 *	48.0
50.0	64.6	101.6	30 000	47 200 *	57 700 *	50.0
52.0	63.4	100.6	27 600	44 300 *	54 400 *	52.0
54.0	62.2	99.5	25 500	41 600 *	51 300 *	54.0
56.0	61.0	98.4	23 300	38 900 *	48 400 *	56.0
58.0	59.8	97.2	21 200	36 400	45 700 *	58.0
60.0	58.6	96.0	19 300	33 900	43 200 *	60.0
62.0	57.4	94.7	17 500	31 600	40 900 *	62.0
64.0	56.1	93.3	15 800	29 500	38 700 *	64.0
66.0	54.8	91.9	14 200	27 500	36 600 *	66.0
68.0	53.5	90.4	12 800	25 600	34 700 *	68.0
70.0	52.2	88.9	11 400	23 900	32 800 *	70.0
74.0	49.5	85.5	8 900	20 600	29 100 *	74.0
78.0	46.6	81.8	6 700	17 800	25 800 *	78.0
82.0	43.6	77.8	4 700	15 200 *	22 800 *	82.0
86.0	40.5	73.2		12 800 *	20 100 *	86.0
90.0	37.1	68.1		10 700 *	17 700 *	90.0
94.0	33.4	62.3		8 800 *	15 400 *	94.0
98.0	29.3	55.5		7 100 *	13 500 *	98.0
102.0	24.5	47.3		5 500 *	11 600 *	102.0
106.0	18.7	36.8			10 000 *	106.0