


Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
Boom No. 79-44 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
108 860 kg and 209 560 kg Wheeled Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

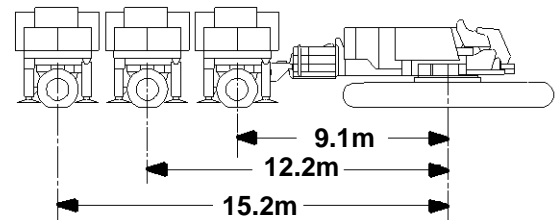

LIFTING CAPACITIES: Chart supplements boom capacity chart series No. 8252. Lifting capacities for various boom lengths, jib lengths and jib operating radii are for freely suspended loads and do not exceed 75% of a static tipping load. Capacities based on structural competence are denoted by an asterisk (*). Capacities indicated by (b) require 2 010 kg minimum block weight with 4 part hoist line reeving on 12.2m jib and 3 part on 18.3m jib.

Wheeled counterweight must be attached to support beam and MAX-ER mode must be selected to operate. Swing and travel (forward or side crawl) requires proper position of counterweight wheels when contacting ground. Exit MAX-ER mode before operating without wheeled counterweight.

Weight of all load blocks, hooks, weight ball, slings, hoist lines, etc., beneath boom and jib point sheaves, is considered part of jib load. Boom and jib are not to be lowered beyond radii where combined weights are greater than rated capacity. Where no capacity is shown, operation is not intended or approved.

OPERATING CONDITIONS: Machine to operate on a firm uniformly supporting surface with gantry in intermediate position and mast up. Refer to boom rigging No. 195224, jib assembly No. 192352, Wire Rope Specification chart No. 8262-A and Counterweight Arrangement chart No. 8412-A. Crane operator judgment must be used to allow for dynamic load effects of swinging, hoisting or lowering, travel, wind conditions, as well as adverse operating conditions and physical machine depreciation. Refer to operators manual for operating guidelines.

MACHINE TRAVEL: Machine to travel on a firm, level and uniformly supporting surface with boom within boom angle range shown in capacity chart. Travel may be limited depending upon ground conditions. Refer to Maximum Allowable Travel Specification chart No. 8263-A when operating without load.

OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation to center of vertical hoist line or load block. Boom angle is angle between horizontal and centerline of boom butt and inserts, and is an indication of operating radius. In all cases, operating radius shall govern capacity.

JIB POINT ELEVATION: Jib point elevation is vertical distance from ground level to centerline of jib point shaft.

MACHINE EQUIPMENT: Machine equipped with MAX-ER 2000, 9 373 mm crawlers, 1 219 mm treads, 8 534 mm retractable gantry, 39.6m mast, 10 part boom hoist reeving, boom support straps, 76 750 kg crane counterweight, two 13 610 kg carbody counterweights and wheeled counterweight as specified.

Maximum capacity on 25.4 mm wire rope is 12 560 kg per line.

WARNING: Check amount of wheeled counterweight on machine before use of this chart. Refer to Counterweight Assembly.

Boom Catwalks Deduct

Deduct 350 kg from capacities when boom catwalks are attached.




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

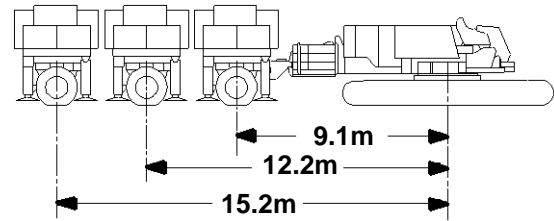

Maximum Boom and Jib Lengths Lifted Unassisted			
Over End of Blocked Crawlers		Over Side or End of Unblocked Crawlers	
Boom Length	Jib Length	Boom Length	Jib Length
108 860 kg Wheeled Counterweight at 9.1m Position			
109.7m	—	103.6m	—
103.6m	12.2m	97.5m	(a) 12.2m
97.5m	30.5m	91.4m	36.6m
91.4m	36.6m		
108 860 kg Wheeled Counterweight at 12.2m Position			
121.9m	—	115.8m	—
115.8m	—	109.7m	—
109.7m	—	103.6m	(b) 24.4m
103.6m	36.6m	97.5m	36.6m
108 860 kg Wheeled Counterweight at 15.2m Position			
121.9m	—	121.9m	—
115.8m	—	115.8m	—
109.7m	18.3m	109.7m	18.3m
103.6m	36.6m	103.6m	36.6m
209 560 kg Wheeled Counterweight at 9.1m Position			
121.9m	—	121.9m	—
115.8m	—	115.8m	—
109.7m	—	109.7m	—
103.6m	18.3m	103.6m	18.3m
97.5m	36.6m	97.5m	36.6m
209 560 kg Wheeled Counterweight at 12.2m Position			
121.9m	—	121.9m	—
115.8m	—	115.8m	—
109.7m	30.5m	109.7m	30.5m
103.6m	36.6m	103.6m	36.6m
209 560 kg Wheeled Counterweight at 15.2m Position			
121.9m	12.2m	121.9m	12.2m
115.8m	36.6m	115.8m	36.6m


Load block, hook and weight ball on ground at start.
 (a) Machine must be equipped with upperworks jacking cylinders when boom catwalks are attached.
 (b) 24.4m jib on 103.6m boom cannot be raised with 108 860 kg wheeled counterweight at 12.2m position when boom catwalks are attached.

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

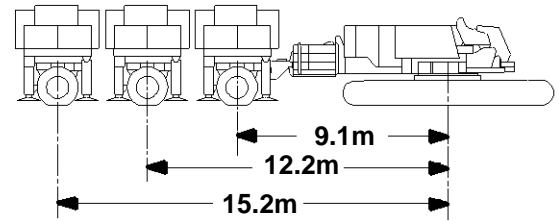

61.0m (200 Ft.) Boom
12.2m (40 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
15.2	80.2	75.6	45 300 *b	45 300 *b	45 300 *b	45 300 *b	45 300 *b	45 300 *b	15.2
16.0	79.6	75.5	44 900 *b	44 900 *b	44 900 *b	44 900 *b	44 900 *b	44 900 *b	16.0
18.0	78.0	75.1	43 300 *b	43 300 *b	43 300 *b	43 300 *b	43 300 *b	43 300 *b	18.0
20.0	76.4	74.6	41 300 *b	41 300 *b	41 300 *b	41 300 *b	41 300 *b	41 300 *b	20.0
22.0	74.8	74.0	39 600 *b	39 600 *b	39 600 *b	39 600 *b	39 600 *b	39 600 *b	22.0
24.0	73.2	73.4	38 000 *b	38 000 *b	38 000 *b	38 000 *b	38 000 *b	38 000 *b	24.0
26.0	71.6	72.8	36 600 *b	36 600 *b	36 600 *b	36 600 *b	36 600 *b	36 600 *b	26.0
28.0	69.9	72.0	35 200 *b	35 200 *b	35 200 *b	35 200 *b	35 200 *b	35 200 *b	28.0
30.0	68.2	71.2	34 000 *b	34 000 *b	34 000 *b	34 000 *b	34 000 *b	34 000 *b	30.0
32.0	66.5	70.4	32 900 *b	32 900 *b	32 900 *b	32 900 *b	32 900 *b	32 900 *b	32.0
34.0	64.8	69.4	31 900 *b	31 900 *b	31 900 *b	31 900 *b	31 900 *b	31 900 *b	34.0
36.0	63.1	68.4	30 900 *	30 900 *	30 900 *	30 900 *	30 900 *	30 900 *	36.0
38.0	61.3	67.3	30 000 *	30 000 *	30 000 *	30 000 *	30 000 *	30 000 *	38.0
40.0	59.5	66.1	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	40.0
42.0	57.7	64.9	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	42.0
44.0	55.8	63.5	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	44.0
46.0	53.9	62.1	27 000 *	27 000 *	27 000 *	27 000 *	27 000 *	27 000 *	46.0
50.0	49.9	58.8	25 800 *	25 800 *	25 800 *	25 800 *	25 800 *	25 800 *	50.0
54.0	45.6	55.1	24 700 *	24 700 *	24 700 *	24 700 *	24 700 *	24 700 *	54.0
58.0	41.0	50.7	23 800 *	23 800 *	23 800 *	23 800 *	23 800 *	23 800 *	58.0
62.0	35.9	45.5	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	62.0
66.0	30.1	39.1	21 000 *	22 400 *	22 400 *	22 400 *	22 400 *	22 400 *	66.0
70.0	22.9	30.8	18 800 *	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	70.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
 ANSI B30.5
 Requirements

MAX-ER 2000 On 2250

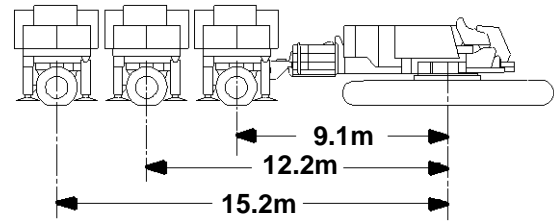

67.1m (220 Ft.) Boom

12.2m (40 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
15.2	81.0	81.8	45 300 *b	45 300 *b	45 300 *b	45 300 *b	45 300 *b	45 300 *b	15.2
16.0	80.4	81.7	45 200 *b	45 200 *b	45 200 *b	45 200 *b	45 200 *b	45 200 *b	16.0
18.0	78.9	81.3	44 300 *b	44 300 *b	44 300 *b	44 300 *b	44 300 *b	44 300 *b	18.0
20.0	77.5	80.9	42 500 *b	42 500 *b	42 500 *b	42 500 *b	42 500 *b	42 500 *b	20.0
22.0	76.0	80.4	40 800 *b	40 800 *b	40 800 *b	40 800 *b	40 800 *b	40 800 *b	22.0
24.0	74.5	79.8	39 200 *b	39 200 *b	39 200 *b	39 200 *b	39 200 *b	39 200 *b	24.0
26.0	73.0	79.2	37 800 *b	37 800 *b	37 800 *b	37 800 *b	37 800 *b	37 800 *b	26.0
28.0	71.5	78.5	36 500 *b	36 500 *b	36 500 *b	36 500 *b	36 500 *b	36 500 *b	28.0
30.0	70.0	77.8	35 200 *b	35 200 *b	35 200 *b	35 200 *b	35 200 *b	35 200 *b	30.0
32.0	68.4	77.0	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	32.0
34.0	66.9	76.1	33 100 *b	33 100 *b	33 100 *b	33 100 *b	33 100 *b	33 100 *b	34.0
36.0	65.3	75.2	32 100 *b	32 100 *b	32 100 *b	32 100 *b	32 100 *b	32 100 *b	36.0
38.0	63.7	74.2	31 200 *b	31 200 *b	31 200 *b	31 200 *b	31 200 *b	31 200 *b	38.0
40.0	62.1	73.2	30 400 *	30 400 *	30 400 *	30 400 *	30 400 *	30 400 *	40.0
42.0	60.4	72.0	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	42.0
44.0	58.7	70.8	28 800 *	28 800 *	28 800 *	28 800 *	28 800 *	28 800 *	44.0
46.0	57.0	69.5	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	46.0
50.0	53.5	66.7	26 900 *	26 900 *	26 900 *	26 900 *	26 900 *	26 900 *	50.0
54.0	49.8	63.4	25 800 *	25 800 *	25 800 *	25 800 *	25 800 *	25 800 *	54.0
58.0	45.9	59.7	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	58.0
62.0	41.7	55.4	22 700	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	62.0
66.0	37.1	50.4	20 200	23 200 *	23 200 *	23 200 *	23 200 *	23 200 *	66.0
70.0	31.9	44.4	18 000	22 600 *	22 000	22 600 *	22 600 *	22 600 *	70.0
74.0	25.8	36.9	16 000	22 100 *	19 800	22 100 *	22 100 *	22 100 *	74.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

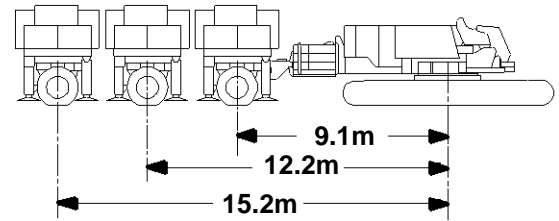

73.2m (240 Ft.) Boom

12.2m (40 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
16.8	80.6	87.8	45 300 *b	45 300 *b	45 300 *b	45 300 *b	45 300 *b	45 300 *b	16.8
18.0	79.7	87.5	44 700 *b	44 700 *b	44 700 *b	44 700 *b	44 700 *b	44 700 *b	18.0
20.0	78.4	87.1	43 600 *b	43 600 *b	43 600 *b	43 600 *b	43 600 *b	43 600 *b	20.0
22.0	77.0	86.7	41 900 *b	41 900 *b	41 900 *b	41 900 *b	41 900 *b	41 900 *b	22.0
24.0	75.6	86.1	40 300 *b	40 300 *b	40 300 *b	40 300 *b	40 300 *b	40 300 *b	24.0
26.0	74.3	85.6	38 900 *b	38 900 *b	38 900 *b	38 900 *b	38 900 *b	38 900 *b	26.0
28.0	72.9	85.0	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	28.0
30.0	71.5	84.3	36 400 *b	36 400 *b	36 400 *b	36 400 *b	36 400 *b	36 400 *b	30.0
32.0	70.0	83.6	35 300 *b	35 300 *b	35 300 *b	35 300 *b	35 300 *b	35 300 *b	32.0
34.0	68.6	82.8	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34.0
36.0	67.2	81.9	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	36.0
38.0	65.7	81.0	32 400 *b	32 400 *b	32 400 *b	32 400 *b	32 400 *b	32 400 *b	38.0
40.0	64.2	80.1	31 500 *b	31 500 *b	31 500 *b	31 500 *b	31 500 *b	31 500 *b	40.0
42.0	62.7	79.0	30 700 *	30 700 *	30 700 *	30 700 *	30 700 *	30 700 *	42.0
44.0	61.2	77.9	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	44.0
46.0	59.7	76.8	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	46.0
50.0	56.5	74.2	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	50.0
54.0	53.2	71.3	26 800 *	26 800 *	26 800 *	26 800 *	26 800 *	26 800 *	54.0
58.0	49.8	68.0	24 500	25 700 *	25 700 *	25 700 *	25 700 *	25 700 *	58.0
62.0	46.1	64.3	21 600	24 900 *	24 900 *	24 900 *	24 900 *	24 900 *	62.0
66.0	42.2	60.1	19 100	24 000 *	23 400	24 000 *	24 000 *	24 000 *	66.0
70.0	38.0	55.2	16 900	23 300 *	20 900	23 300 *	23 300 *	23 300 *	70.0
74.0	33.4	49.5	14 900	22 700 *	18 700	22 700 *	22 500	22 700 *	74.0
78.0	28.1	42.6	13 200	20 200 *	16 700	22 200 *	20 300	22 200 *	78.0
82.0	21.5	33.6	11 500	17 100 *	14 900	21 900 *	18 300	21 900 *	82.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

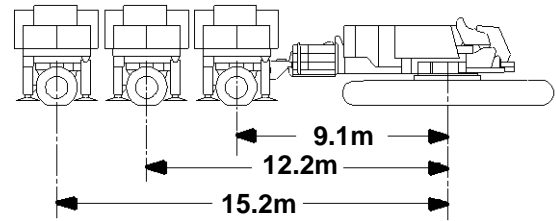

79.2m (260 Ft.) Boom

12.2m (40 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
18.3	80.2	93.7	44 600 *b	44 600 *b	44 600 *b	44 600 *b	44 600 *b	44 600 *b	18.3
20.0	79.2	93.3	43 900 *b	43 900 *b	43 900 *b	43 900 *b	43 900 *b	43 900 *b	20.0
22.0	77.9	92.9	42 900 *b	42 900 *b	42 900 *b	42 900 *b	42 900 *b	42 900 *b	22.0
24.0	76.6	92.4	41 300 *b	41 300 *b	41 300 *b	41 300 *b	41 300 *b	41 300 *b	24.0
26.0	75.3	91.9	39 900 *b	39 900 *b	39 900 *b	39 900 *b	39 900 *b	39 900 *b	26.0
28.0	74.0	91.3	38 600 *b	38 600 *b	38 600 *b	38 600 *b	38 600 *b	38 600 *b	28.0
30.0	72.7	90.7	37 400 *b	37 400 *b	37 400 *b	37 400 *b	37 400 *b	37 400 *b	30.0
32.0	71.4	90.0	36 300 *b	36 300 *b	36 300 *b	36 300 *b	36 300 *b	36 300 *b	32.0
34.0	70.1	89.3	35 300 *b	35 300 *b	35 300 *b	35 300 *b	35 300 *b	35 300 *b	34.0
36.0	68.8	88.5	34 300 *b	34 300 *b	34 300 *b	34 300 *b	34 300 *b	34 300 *b	36.0
38.0	67.4	87.7	33 400 *b	33 400 *b	33 400 *b	33 400 *b	33 400 *b	33 400 *b	38.0
40.0	66.0	86.8	32 500 *b	32 500 *b	32 500 *b	32 500 *b	32 500 *b	32 500 *b	40.0
42.0	64.7	85.9	31 700 *b	31 700 *b	31 700 *b	31 700 *b	31 700 *b	31 700 *b	42.0
44.0	63.3	84.9	31 000 *b	31 000 *b	31 000 *b	31 000 *b	31 000 *b	31 000 *b	44.0
46.0	61.9	83.8	30 200 *	30 200 *	30 200 *	30 200 *	30 200 *	30 200 *	46.0
50.0	59.0	81.5	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	50.0
54.0	56.0	78.8	27 500 *	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	54.0
58.0	52.9	75.9	24 200 *	26 700 *	26 700 *	26 700 *	26 700 *	26 700 *	58.0
62.0	49.7	72.6	21 400 *	25 700 *	25 700 *	25 700 *	25 700 *	25 700 *	62.0
66.0	46.3	68.9	18 900 *	24 900 *	23 100 *	24 900 *	24 900 *	24 900 *	66.0
70.0	42.7	64.8	16 700 *	24 100 *	20 600 *	24 100 *	24 100 *	24 100 *	70.0
74.0	38.9	60.0	14 700 *	23 500 *	18 500 *	23 500 *	22 300 *	23 500 *	74.0
78.0	34.6	54.5	12 900 *	21 100 *	16 500 *	21 300 *	20 100 *	21 300 *	78.0
82.0	29.9	48.0	11 400 *	15 300 *	14 700 *	15 300 *	15 300 *	15 300 *	82.0
86.0	24.3	39.9	9 700 *	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	86.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

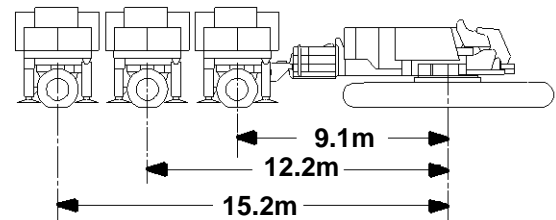

85.3m (280 Ft.) Boom

12.2m (40 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
19.8	80.2	99.6	43 000 *b	43 000 *b	43 000 *b	43 000 *b	43 000 *b	43 000 *b	19.8
20.0	80.1	99.5	43 000 *b	43 000 *b	43 000 *b	43 000 *b	43 000 *b	43 000 *b	20.0
22.0	78.9	99.1	41 900 *b	41 900 *b	41 900 *b	41 900 *b	41 900 *b	41 900 *b	22.0
24.0	77.7	98.7	40 500 *b	40 500 *b	40 500 *b	40 500 *b	40 500 *b	40 500 *b	24.0
26.0	76.5	98.2	39 300 *b	39 300 *b	39 300 *b	39 300 *b	39 300 *b	39 300 *b	26.0
28.0	75.3	97.7	38 100 *b	38 100 *b	38 100 *b	38 100 *b	38 100 *b	38 100 *b	28.0
30.0	74.1	97.1	37 100 *b	37 100 *b	37 100 *b	37 100 *b	37 100 *b	37 100 *b	30.0
32.0	72.8	96.4	36 100 *b	36 100 *b	36 100 *b	36 100 *b	36 100 *b	36 100 *b	32.0
34.0	71.6	95.8	35 100 *b	35 100 *b	35 100 *b	35 100 *b	35 100 *b	35 100 *b	34.0
36.0	70.4	95.0	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	36.0
38.0	69.1	94.3	33 400 *b	33 400 *b	33 400 *b	33 400 *b	33 400 *b	33 400 *b	38.0
40.0	67.9	93.4	32 600 *b	32 600 *b	32 600 *b	32 600 *b	32 600 *b	32 600 *b	40.0
42.0	66.6	92.6	31 800 *b	31 800 *b	31 800 *b	31 800 *b	31 800 *b	31 800 *b	42.0
44.0	65.3	91.6	31 100 *b	31 100 *b	31 100 *b	31 100 *b	31 100 *b	31 100 *b	44.0
46.0	64.0	90.7	30 400 *b	30 400 *b	30 400 *b	30 400 *b	30 400 *b	30 400 *b	46.0
50.0	61.3	88.5	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	50.0
54.0	58.6	86.1	27 800	28 100 *	28 100 *	28 100 *	28 100 *	28 100 *	54.0
58.0	55.8	83.4	24 300	27 100 *	27 100 *	27 100 *	27 100 *	27 100 *	58.0
62.0	52.9	80.5	21 500	26 200 *	25 900	26 200 *	26 200 *	26 200 *	62.0
66.0	49.9	77.2	18 900	25 300 *	23 200	25 300 *	25 300 *	25 300 *	66.0
70.0	46.7	73.5	16 700	24 600 *	20 700	24 600 *	24 600 *	24 600 *	70.0
74.0	43.4	69.4	14 800	23 900 *	18 500	23 900 *	22 300	23 900 *	74.0
78.0	39.8	64.7	13 000	22 500 *	16 600	23 400 *	20 100	23 400 *	78.0
82.0	35.9	59.4	11 400	19 500 *	14 800	22 800 *	18 200	22 800 *	82.0
86.0	31.6	53.2	9 900	16 800 *	13 200	22 400 *	16 400	22 400 *	86.0
90.0	26.6	45.8	8 600	14 300 *	11 700	21 200 *	14 700	22 100 *	90.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

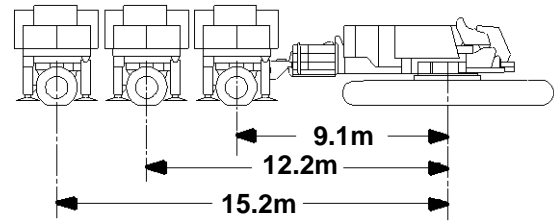

91.4m (300 Ft.) Boom

12.2m (40 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
19.8	80.8	105.8	42 900 *b	42 900 *b	42 900 *b	42 900 *b	42 900 *b	42 900 *b	19.8
20.0	80.7	105.7	42 800 *b	42 800 *b	42 800 *b	42 800 *b	42 800 *b	42 800 *b	20.0
22.0	79.5	105.4	42 200 *b	42 200 *b	42 200 *b	42 200 *b	42 200 *b	42 200 *b	22.0
24.0	78.4	104.9	41 200 *b	41 200 *b	41 200 *b	41 200 *b	41 200 *b	41 200 *b	24.0
26.0	77.3	104.5	40 000 *b	40 000 *b	40 000 *b	40 000 *b	40 000 *b	40 000 *b	26.0
28.0	76.2	104.0	38 900 *b	38 900 *b	38 900 *b	38 900 *b	38 900 *b	38 900 *b	28.0
30.0	75.0	103.4	37 800 *b	37 800 *b	37 800 *b	37 800 *b	37 800 *b	37 800 *b	30.0
32.0	73.9	102.8	36 800 *b	36 800 *b	36 800 *b	36 800 *b	36 800 *b	36 800 *b	32.0
34.0	72.7	102.2	35 900 *b	35 900 *b	35 900 *b	35 900 *b	35 900 *b	35 900 *b	34.0
36.0	71.6	101.5	35 000 *b	35 000 *b	35 000 *b	35 000 *b	35 000 *b	35 000 *b	36.0
38.0	70.4	100.8	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	38.0
40.0	69.2	100.0	33 400 *b	33 400 *b	33 400 *b	33 400 *b	33 400 *b	33 400 *b	40.0
42.0	68.0	99.2	32 700 *b	32 700 *b	32 700 *b	32 700 *b	32 700 *b	32 700 *b	42.0
44.0	66.8	98.4	32 000 *b	32 000 *b	32 000 *b	32 000 *b	32 000 *b	32 000 *b	44.0
46.0	65.6	97.4	31 300 *b	31 300 *b	31 300 *b	31 300 *b	31 300 *b	31 300 *b	46.0
50.0	63.2	95.4	30 000 *	30 000 *	30 000 *	30 000 *	30 000 *	30 000 *	50.0
54.0	60.7	93.2	27 300	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	54.0
58.0	58.1	90.8	24 000	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	58.0
62.0	55.4	88.1	21 100	26 900 *	25 700	26 900 *	26 900 *	26 900 *	62.0
66.0	52.7	85.1	18 600	26 100 *	22 900	26 100 *	26 100 *	26 100 *	66.0
70.0	49.8	81.8	16 400	25 300 *	20 400	25 300 *	24 400	25 300 *	70.0
74.0	46.8	78.1	14 500	24 600 *	18 200	24 600 *	22 000	24 600 *	74.0
78.0	43.7	74.0	12 700	22 900 *	16 200	24 000 *	19 800	24 000 *	78.0
82.0	40.4	69.5	11 100	20 100 *	14 500	23 400 *	17 900	23 400 *	82.0
86.0	36.8	64.3	9 600	17 500 *	12 900	23 000 *	16 100	23 000 *	86.0
90.0	32.8	58.4	8 300	15 000 *	11 400	22 100 *	14 500	22 500 *	90.0
94.0	28.4	51.4	7 100	12 600 *	10 000	19 400 *	13 000	22 200 *	94.0
98.0	23.2	42.8	5 900 *	10 400 *	8 800	16 700 *	11 600	21 900 *	98.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

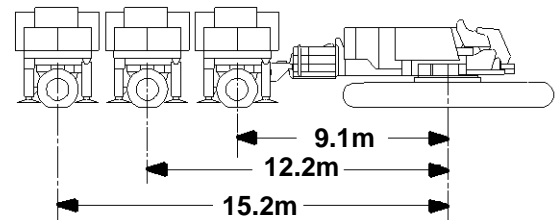

97.5m (320 Ft.) Boom
 12.2m (40 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.5	111.7	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	21.3
22.0	80.1	111.6	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	22.0
24.0	79.1	111.2	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	24.0
26.0	78.0	110.7	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	26.0
28.0	76.9	110.3	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	28.0
30.0	75.9	109.7	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	30.0
32.0	74.8	109.2	37 400 *b	37 400 *b	37 400 *b	37 400 *b	37 400 *b	37 400 *b	32.0
34.0	73.7	108.6	36 500 *b	36 500 *b	36 500 *b	36 500 *b	36 500 *b	36 500 *b	34.0
36.0	72.6	108.0	35 600 *b	35 600 *b	35 600 *b	35 600 *b	35 600 *b	35 600 *b	36.0
38.0	71.5	107.3	34 800 *b	34 800 *b	34 800 *b	34 800 *b	34 800 *b	34 800 *b	38.0
40.0	70.4	106.6	34 000 *b	34 000 *b	34 000 *b	34 000 *b	34 000 *b	34 000 *b	40.0
42.0	69.3	105.8	33 300 *b	33 300 *b	33 300 *b	33 300 *b	33 300 *b	33 300 *b	42.0
44.0	68.2	105.0	32 600 *b	32 600 *b	32 600 *b	32 600 *b	32 600 *b	32 600 *b	44.0
46.0	67.1	104.1	31 900 *b	31 900 *b	31 900 *b	31 900 *b	31 900 *b	31 900 *b	46.0
50.0	64.8	102.3	29 800 *b	30 700 *b	30 700 *b	30 700 *b	30 700 *b	30 700 *b	50.0
54.0	62.4	100.2	25 800	29 500 *	29 500 *	29 500 *	29 500 *	29 500 *	54.0
58.0	60.0	98.0	22 400	28 500 *	27 300	28 500 *	28 500 *	28 500 *	58.0
62.0	57.6	95.5	19 600	27 600 *	24 100	27 600 *	27 600 *	27 600 *	62.0
66.0	55.1	92.7	17 000	26 700 *	21 300	26 700 *	25 600	26 700 *	66.0
70.0	52.5	89.7	14 800	25 900 *	18 800	25 900 *	22 800	25 900 *	70.0
74.0	49.8	86.4	12 900	23 400 *	16 600	25 200 *	20 400	25 200 *	74.0
78.0	47.0	82.7	11 100	21 200 *	14 700	24 500 *	18 200	24 500 *	78.0
82.0	44.0	78.7	9 500	18 800 *	12 900	23 900 *	16 300	23 900 *	82.0
86.0	40.9	74.2	8 000	16 100 *	11 300	23 100 *	14 500	23 400 *	86.0
90.0	37.5	69.1	6 600 *	13 700 *	9 800	20 900 *	12 900	22 900 *	90.0
94.0	33.9	63.4	5 100 *	11 400 *	8 500	18 300 *	11 400	22 500 *	94.0
98.0	29.9	56.8	3 700 *	9 300 *	7 200	15 800 *	10 000	22 000 *	98.0
102.0	25.3	48.9	2 500 *	7 300 *	6 000	13 400 *	8 700	19 100 *	102.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

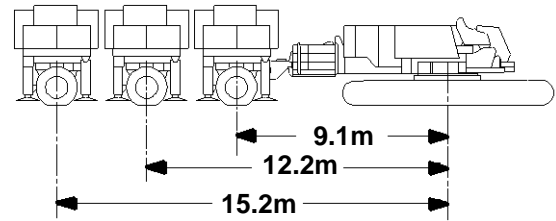

103.6m (340 Ft.) Boom

12.2m (40 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	81.0	117.9	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	21.3
22.0	80.7	117.8	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	22.0
24.0	79.6	117.4	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	24.0
26.0	78.6	117.0	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	26.0
28.0	77.6	116.5	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	28.0
30.0	76.6	116.0	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	30.0
32.0	75.6	115.5	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	37 600 *b	32.0
34.0	74.6	115.0	37 200 *b	37 200 *b	37 200 *b	37 200 *b	37 200 *b	37 200 *b	34.0
36.0	73.6	114.4	36 300 *b	36 300 *b	36 300 *b	36 300 *b	36 300 *b	36 300 *b	36.0
38.0	72.5	113.7	35 500 *b	35 500 *b	35 500 *b	35 500 *b	35 500 *b	35 500 *b	38.0
40.0	71.5	113.0	34 700 *b	34 700 *b	34 700 *b	34 700 *b	34 700 *b	34 700 *b	40.0
42.0	70.4	112.3	34 000 *b	34 000 *b	34 000 *b	34 000 *b	34 000 *b	34 000 *b	42.0
44.0	69.4	111.6	33 300 *b	33 300 *b	33 300 *b	33 300 *b	33 300 *b	33 300 *b	44.0
46.0	68.3	110.8	32 700 *b	32 700 *b	32 700 *b	32 700 *b	32 700 *b	32 700 *b	46.0
50.0	66.2	109.0	29 400 b	31 400 *b	31 400 *b	31 400 *b	31 400 *b	31 400 *b	50.0
54.0	64.0	107.1	25 500 b	30 200 *b	30 200 b	30 200 *b	30 200 *b	30 200 *b	54.0
58.0	61.8	105.0	22 200	29 200 *	27 000	29 200 *	29 200 *	29 200 *	58.0
62.0	59.5	102.7	19 200	28 200 *	23 800	28 200 *	28 100	28 200 *	62.0
66.0	57.2	100.1	16 700	27 300 *	21 000	27 300 *	25 200	27 300 *	66.0
70.0	54.8	97.3	14 500	25 500 *	18 500	26 500 *	22 500	26 500 *	70.0
74.0	52.3	94.3	12 500	23 100 *	16 300	25 800 *	20 100	25 800 *	74.0
78.0	49.7	91.0	10 800	20 900 *	14 300	25 100 *	17 900	25 100 *	78.0
82.0	47.1	87.3	9 200	18 900 *	12 500	24 500 *	16 000	24 500 *	82.0
86.0	44.3	83.3	7 700 *	16 500 *	10 900	22 700 *	14 200	23 900 *	86.0
90.0	41.4	78.9	6 100 *	14 100 *	9 500	20 800 *	12 600	23 400 *	90.0
94.0	38.2	74.0	4 700 *	11 800 *	8 100	18 800 *	11 100	23 000 *	94.0
98.0	34.9	68.4	3 300 *	9 700 *	6 900	16 300 *	9 700	21 700 *	98.0
102.0	31.2	62.1	2 100 *	7 700 *	5 600 *	14 000 *	8 500	18 900 *	102.0
106.0	27.0	54.7		5 900 *	4 300 *	11 800 *	7 300	16 300 *	106.0
110.0	22.2	45.6		4 000 *	3 000 *	9 700 *	6 200	13 500 *	110.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

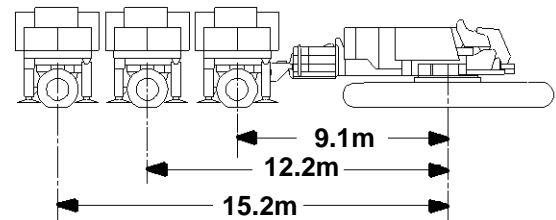

109.7m (360 Ft.) Boom
12.2m (40 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position	15.2m Position		Jib Oper. Rad. Meters
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.7	123.8	37 600 *b	37 600 *b	37 600 *b	22.9
24.0	80.2	123.6	37 600 *b	37 600 *b	37 600 *b	24.0
26.0	79.2	123.2	37 600 *b	37 600 *b	37 600 *b	26.0
28.0	78.3	122.8	37 600 *b	37 600 *b	37 600 *b	28.0
30.0	77.3	122.3	37 600 *b	37 600 *b	37 600 *b	30.0
32.0	76.3	121.8	37 600 *b	37 600 *b	37 600 *b	32.0
34.0	75.4	121.3	37 500 *b	37 500 *b	37 500 *b	34.0
36.0	74.4	120.7	36 900 *b	36 900 *b	36 900 *b	36.0
38.0	73.4	120.1	36 100 *b	36 100 *b	36 100 *b	38.0
40.0	72.4	119.5	35 300 *b	35 300 *b	35 300 *b	40.0
42.0	71.5	118.8	34 600 *b	34 600 *b	34 600 *b	42.0
44.0	70.5	118.1	33 900 *b	33 900 *b	33 900 *b	44.0
46.0	69.5	117.3	33 200 *b	33 200 *b	33 200 *b	46.0
50.0	67.4	115.7	32 000 *b	32 000 *b	32 000 *b	50.0
54.0	65.4	113.9	30 800 *b	30 800 *b	30 800 *b	54.0
58.0	63.3	111.9	29 800 *b	29 800 *b	29 800 *b	58.0
62.0	61.2	109.7	28 800 *	28 300	28 800 *	62.0
66.0	59.0	107.4	27 900 *	25 100	27 900 *	66.0
70.0	56.8	104.8	27 100 *	22 400	27 100 *	70.0
74.0	54.5	102.0	26 400 *	20 000	26 400 *	74.0
78.0	52.1	98.9	25 700 *	17 800	25 700 *	78.0
82.0	49.7	95.6	24 700 *	15 900	25 000 *	82.0
86.0	47.2	91.9	22 600 *	14 100	24 400 *	86.0
90.0	44.5	88.0	20 600 *	12 500	23 900 *	90.0
94.0	41.8	83.6	18 900 *	11 000	23 400 *	94.0
98.0	38.8	78.7	17 100 *	9 600	21 800 *	98.0
102.0	35.7	73.4	14 800 *	8 400	19 000 *	102.0
106.0	32.3	67.3	12 600 *	7 200	16 200 *	106.0
110.0	28.5	60.2	10 600 *	6 100 *	13 600 *	110.0
114.0	24.2	51.9	8 600 *	4 900 *	11 000 *	114.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

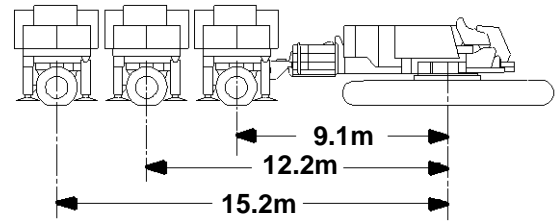

**115.8m (380 Ft.) Boom
 12.2m (40 Ft.) Jib, 5 Degree Offset**

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
24.4	80.5	129.7	37 600 *b
26.0	79.7	129.4	37 600 *b
28.0	78.8	129.0	37 600 *b
30.0	77.9	128.6	37 600 *b
32.0	77.0	128.1	37 600 *b
34.0	76.1	127.6	37 600 *b
36.0	75.2	127.1	37 400 *b
38.0	74.2	126.5	36 600 *b
40.0	73.3	125.9	35 900 *b
42.0	72.4	125.2	35 100 *b
44.0	71.4	124.6	34 400 *b
46.0	70.5	123.8	33 700 *b
50.0	68.6	122.3	32 500 *b
54.0	66.6	120.6	31 400 *b
58.0	64.7	118.7	30 300 *b
62.0	62.7	116.7	29 300 *
66.0	60.6	114.5	28 500 *
70.0	58.5	112.1	27 600 *
74.0	56.4	109.4	26 900 *
78.0	54.2	106.6	26 200 *
82.0	52.0	103.5	25 500 *
86.0	49.7	100.2	24 900 *
90.0	47.3	96.6	24 300 *
94.0	44.8	92.6	23 700 *
98.0	42.1	88.3	21 500 *
102.0	39.4	83.5	18 600 *
106.0	36.4	78.2	15 900 *
110.0	33.2	72.4	13 300 *
114.0	29.8	65.6	10 900 *
118.0	25.9	57.8	8 700 *

**121.9m (400 Ft.) Boom
 12.2m (40 Ft.) Jib, 5 Degree Offset**


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
24.4	80.9	135.9	37 600 *b
26.0	80.2	135.6	37 600 *b
28.0	79.3	135.2	37 600 *b
30.0	78.5	134.8	37 600 *b
32.0	77.6	134.4	37 600 *b
34.0	76.7	133.9	36 700 *b
36.0	75.8	133.4	36 800 *b
38.0	75.0	132.8	36 600 *b
40.0	74.1	132.3	36 200 *b
42.0	73.2	131.6	35 500 *b
44.0	72.3	131.0	34 800 *b
46.0	71.4	130.3	34 100 *b
50.0	69.6	128.9	32 900 *b
54.0	67.8	127.2	31 800 *b
58.0	65.9	125.5	30 800 *b
62.0	64.0	123.5	29 800 *b
66.0	62.1	121.5	28 900 *
70.0	60.1	119.2	28 100 *
74.0	58.1	116.7	27 300 *
78.0	56.1	114.1	26 600 *
82.0	54.0	111.2	26 000 *
86.0	51.9	108.1	25 300 *
90.0	49.6	104.8	24 800 *
94.0	47.3	101.2	23 600 *
98.0	45.0	97.2	21 600 *
102.0	42.5	92.9	18 600 *
106.0	39.8	88.3	15 900 *
110.0	37.1	83.1	13 400 *
114.0	34.1	77.4	11 100 *
118.0	30.9	70.9	8 900 *
122.0	27.3	63.6	6 800 *
126.0	23.2	54.8	4 800 *

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

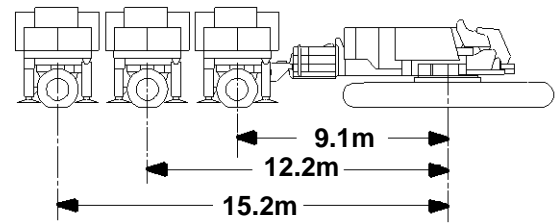

61.0m (200 Ft.) Boom

12.2m (40 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
16.8	80.9	75.0	34 300 *b	34 300 *b	34 300 *b	34 300 *b	34 300 *b	34 300 *b	16.8
18.0	79.9	74.7	33 600 *b	33 600 *b	33 600 *b	33 600 *b	33 600 *b	33 600 *b	18.0
20.0	78.3	74.3	32 600 *b	32 600 *b	32 600 *b	32 600 *b	32 600 *b	32 600 *b	20.0
22.0	76.7	73.7	31 600 *b	31 600 *b	31 600 *b	31 600 *b	31 600 *b	31 600 *b	22.0
24.0	75.0	73.1	30 700 *b	30 700 *b	30 700 *b	30 700 *b	30 700 *b	30 700 *b	24.0
26.0	73.4	72.4	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	26.0
28.0	71.7	71.7	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	28.0
30.0	70.1	70.9	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	30.0
32.0	68.4	70.0	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	32.0
34.0	66.6	69.1	27 100 *	27 100 *	27 100 *	27 100 *	27 100 *	27 100 *	34.0
36.0	64.9	68.0	26 500 *	26 500 *	26 500 *	26 500 *	26 500 *	26 500 *	36.0
38.0	63.1	66.9	26 000 *	26 000 *	26 000 *	26 000 *	26 000 *	26 000 *	38.0
40.0	61.3	65.8	25 400 *	25 400 *	25 400 *	25 400 *	25 400 *	25 400 *	40.0
42.0	59.4	64.5	24 600 *	24 600 *	24 600 *	24 600 *	24 600 *	24 600 *	42.0
44.0	57.5	63.1	23 800 *	23 800 *	23 800 *	23 800 *	23 800 *	23 800 *	44.0
46.0	55.6	61.6	23 100 *	23 100 *	23 100 *	23 100 *	23 100 *	23 100 *	46.0
50.0	51.6	58.4	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	50.0
54.0	47.3	54.6	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	54.0
58.0	42.7	50.2	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	58.0
62.0	37.5	44.9	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	62.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

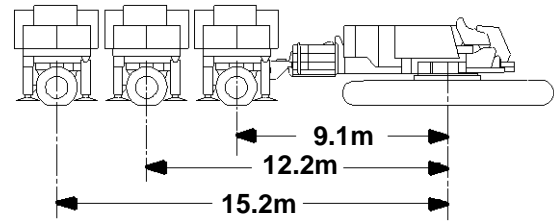

67.1m (220 Ft.) Boom

12.2m (40 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
18.3	80.5	80.9	34 000 *b	34 000 *b	34 000 *b	34 000 *b	34 000 *b	34 000 *b	18.3
20.0	79.2	80.5	33 100 *b	33 100 *b	33 100 *b	33 100 *b	33 100 *b	33 100 *b	20.0
22.0	77.7	80.0	32 200 *b	32 200 *b	32 200 *b	32 200 *b	32 200 *b	32 200 *b	22.0
24.0	76.2	79.5	31 300 *b	31 300 *b	31 300 *b	31 300 *b	31 300 *b	31 300 *b	24.0
26.0	74.7	78.8	30 500 *b	30 500 *b	30 500 *b	30 500 *b	30 500 *b	30 500 *b	26.0
28.0	73.2	78.2	29 800 *	29 800 *	29 800 *	29 800 *	29 800 *	29 800 *	28.0
30.0	71.7	77.4	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	30.0
32.0	70.1	76.6	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	32.0
34.0	68.5	75.8	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	34.0
36.0	67.0	74.9	27 200 *	27 200 *	27 200 *	27 200 *	27 200 *	27 200 *	36.0
38.0	65.4	73.9	26 700 *	26 700 *	26 700 *	26 700 *	26 700 *	26 700 *	38.0
40.0	63.7	72.8	26 200 *	26 200 *	26 200 *	26 200 *	26 200 *	26 200 *	40.0
42.0	62.1	71.7	25 700 *	25 700 *	25 700 *	25 700 *	25 700 *	25 700 *	42.0
44.0	60.4	70.4	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	44.0
46.0	58.7	69.1	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	46.0
50.0	55.1	66.3	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	50.0
54.0	51.4	63.0	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	54.0
58.0	47.4	59.2	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	58.0
62.0	43.2	54.9	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	62.0
66.0	38.5	49.8	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	66.0
70.0	33.3	43.7	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	70.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

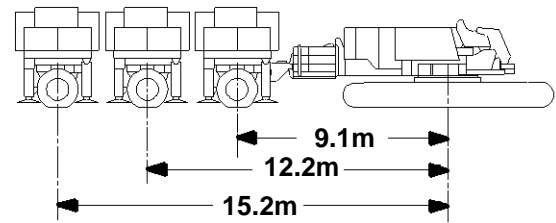

73.2m (240 Ft.) Boom

12.2m (40 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
19.8	80.1	86.8	33 700 *b	33 700 *b	33 700 *b	33 700 *b	33 700 *b	33 700 *b	19.8
20.0	80.0	86.8	33 600 *b	33 600 *b	33 600 *b	33 600 *b	33 600 *b	33 600 *b	20.0
22.0	78.6	86.3	32 700 *b	32 700 *b	32 700 *b	32 700 *b	32 700 *b	32 700 *b	22.0
24.0	77.2	85.8	31 900 *b	31 900 *b	31 900 *b	31 900 *b	31 900 *b	31 900 *b	24.0
26.0	75.8	85.2	31 100 *b	31 100 *b	31 100 *b	31 100 *b	31 100 *b	31 100 *b	26.0
28.0	74.4	84.6	30 400 *b	30 400 *b	30 400 *b	30 400 *b	30 400 *b	30 400 *b	28.0
30.0	73.0	83.9	29 700 *	29 700 *	29 700 *	29 700 *	29 700 *	29 700 *	30.0
32.0	71.6	83.2	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	32.0
34.0	70.2	82.4	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	34.0
36.0	68.7	81.6	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	36.0
38.0	67.2	80.6	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	38.0
40.0	65.8	79.7	26 800 *	26 800 *	26 800 *	26 800 *	26 800 *	26 800 *	40.0
42.0	64.3	78.6	26 300 *	26 300 *	26 300 *	26 300 *	26 300 *	26 300 *	42.0
44.0	62.7	77.5	25 900 *	25 900 *	25 900 *	25 900 *	25 900 *	25 900 *	44.0
46.0	61.2	76.4	25 400 *	25 400 *	25 400 *	25 400 *	25 400 *	25 400 *	46.0
50.0	58.0	73.8	24 000 *	24 000 *	24 000 *	24 000 *	24 000 *	24 000 *	50.0
54.0	54.7	70.9	22 800 *	22 800 *	22 800 *	22 800 *	22 800 *	22 800 *	54.0
58.0	51.2	67.6	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	58.0
62.0	47.6	63.8	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	62.0
66.0	43.6	59.6	19 500 *	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	66.0
70.0	39.4	54.7	17 200 *	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	70.0
74.0	34.7	48.9	15 200 *	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	74.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

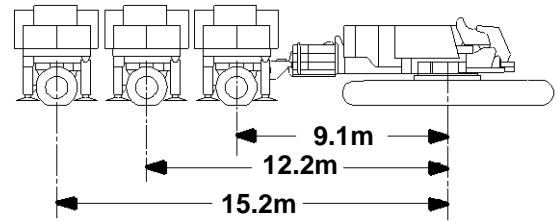

79.2m (260 Ft.) Boom

12.2m (40 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
19.8	80.8	93.0	34 100 *b	34 100 *b	34 100 *b	34 100 *b	34 100 *b	34 100 *b	19.8
20.0	80.7	93.0	34 000 *b	34 000 *b	34 000 *b	34 000 *b	34 000 *b	34 000 *b	20.0
22.0	79.4	92.6	33 100 *b	33 100 *b	33 100 *b	33 100 *b	33 100 *b	33 100 *b	22.0
24.0	78.1	92.1	32 300 *b	32 300 *b	32 300 *b	32 300 *b	32 300 *b	32 300 *b	24.0
26.0	76.8	91.6	31 600 *b	31 600 *b	31 600 *b	31 600 *b	31 600 *b	31 600 *b	26.0
28.0	75.5	91.0	30 900 *b	30 900 *b	30 900 *b	30 900 *b	30 900 *b	30 900 *b	28.0
30.0	74.2	90.4	30 200 *	30 200 *	30 200 *	30 200 *	30 200 *	30 200 *	30.0
32.0	72.9	89.7	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	32.0
34.0	71.6	88.9	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	34.0
36.0	70.2	88.2	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	36.0
38.0	68.9	87.3	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	38.0
40.0	67.5	86.4	27 400 *	27 400 *	27 400 *	27 400 *	27 400 *	27 400 *	40.0
42.0	66.1	85.5	26 900 *	26 900 *	26 900 *	26 900 *	26 900 *	26 900 *	42.0
44.0	64.7	84.5	26 500 *	26 500 *	26 500 *	26 500 *	26 500 *	26 500 *	44.0
46.0	63.3	83.4	26 100 *	26 100 *	26 100 *	26 100 *	26 100 *	26 100 *	46.0
50.0	60.4	81.0	25 200 *	25 200 *	25 200 *	25 200 *	25 200 *	25 200 *	50.0
54.0	57.4	78.4	23 800 *	23 800 *	23 800 *	23 800 *	23 800 *	23 800 *	54.0
58.0	54.3	75.5	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	58.0
62.0	51.1	72.2	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	62.0
66.0	47.7	68.4	19 300	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	66.0
70.0	44.0	64.2	17 000	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	70.0
74.0	40.1	59.5	15 000	19 100 *	18 800	19 100 *	19 100 *	19 100 *	74.0
78.0	35.9	53.9	13 200	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	78.0
82.0	31.0	47.3	11 500	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	82.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

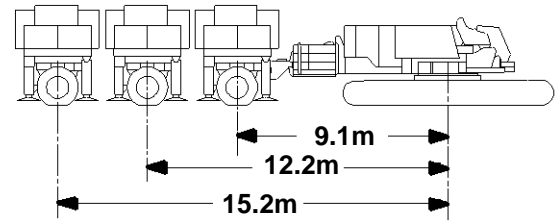

85.3m (280 Ft.) Boom

12.2m (40 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.6	98.9	33 500 *b	33 500 *b	33 500 *b	33 500 *b	33 500 *b	33 500 *b	21.3
22.0	80.2	98.8	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	22.0
24.0	79.0	98.3	32 500 *b	32 500 *b	32 500 *b	32 500 *b	32 500 *b	32 500 *b	24.0
26.0	77.8	97.8	31 800 *b	31 800 *b	31 800 *b	31 800 *b	31 800 *b	31 800 *b	26.0
28.0	76.5	97.3	31 100 *b	31 100 *b	31 100 *b	31 100 *b	31 100 *b	31 100 *b	28.0
30.0	75.3	96.7	30 400 *b	30 400 *b	30 400 *b	30 400 *b	30 400 *b	30 400 *b	30.0
32.0	74.1	96.1	29 800 *	29 800 *	29 800 *	29 800 *	29 800 *	29 800 *	32.0
34.0	72.9	95.4	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	34.0
36.0	71.6	94.7	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	36.0
38.0	70.4	93.9	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	38.0
40.0	69.1	93.1	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	40.0
42.0	67.8	92.2	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	42.0
44.0	66.5	91.2	26 800 *	26 800 *	26 800 *	26 800 *	26 800 *	26 800 *	44.0
46.0	65.2	90.2	26 400 *	26 400 *	26 400 *	26 400 *	26 400 *	26 400 *	46.0
50.0	62.5	88.1	25 600 *	25 600 *	25 600 *	25 600 *	25 600 *	25 600 *	50.0
54.0	59.8	85.7	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	54.0
58.0	57.0	83.0	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	58.0
62.0	54.1	80.0	21 900 *	23 800 *	23 800 *	23 800 *	23 800 *	23 800 *	62.0
66.0	51.0	76.7	19 400 *	23 300 *	23 200 *	23 300 *	23 300 *	23 300 *	66.0
70.0	47.8	73.0	17 100 *	22 800 *	21 100 *	22 800 *	22 800 *	22 800 *	70.0
74.0	44.4	68.8	15 100 *	22 500 *	18 800 *	22 500 *	22 400 *	22 500 *	74.0
78.0	40.8	64.1	13 300 *	22 100 *	16 800 *	22 200 *	20 400 *	22 200 *	78.0
82.0	36.9	58.8	11 600 *	19 900 *	15 000 *	21 900 *	18 400 *	21 900 *	82.0
86.0	32.5	52.5	10 100 *	17 200 *	13 300 *	21 800 *	16 600 *	21 800 *	86.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

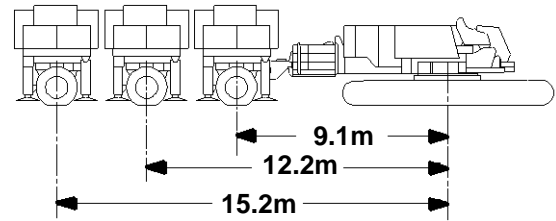

91.4m (300 Ft.) Boom
12.2m (40 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.3	104.8	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	22.9
24.0	79.6	104.6	32 800 *b	32 800 *b	32 800 *b	32 800 *b	32 800 *b	32 800 *b	24.0
26.0	78.5	104.1	32 100 *b	32 100 *b	32 100 *b	32 100 *b	32 100 *b	32 100 *b	26.0
28.0	77.4	103.6	31 500 *b	31 500 *b	31 500 *b	31 500 *b	31 500 *b	31 500 *b	28.0
30.0	76.2	103.0	30 800 *b	30 800 *b	30 800 *b	30 800 *b	30 800 *b	30 800 *b	30.0
32.0	75.1	102.5	30 300 *b	30 300 *b	30 300 *b	30 300 *b	30 300 *b	30 300 *b	32.0
34.0	73.9	101.8	29 700 *	29 700 *	29 700 *	29 700 *	29 700 *	29 700 *	34.0
36.0	72.7	101.1	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	36.0
38.0	71.6	100.4	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	38.0
40.0	70.4	99.6	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	40.0
42.0	69.2	98.8	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	42.0
44.0	68.0	98.0	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	44.0
46.0	66.8	97.0	26 900 *	26 900 *	26 900 *	26 900 *	26 900 *	26 900 *	46.0
50.0	64.3	95.0	26 100 *	26 100 *	26 100 *	26 100 *	26 100 *	26 100 *	50.0
54.0	61.8	92.8	25 500 *	25 500 *	25 500 *	25 500 *	25 500 *	25 500 *	54.0
58.0	59.2	90.3	24 600	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	58.0
62.0	56.5	87.6	21 600	24 200 *	24 200 *	24 200 *	24 200 *	24 200 *	62.0
66.0	53.8	84.6	19 100	23 700 *	23 400	23 700 *	23 700 *	23 700 *	66.0
70.0	50.9	81.3	16 800	23 300 *	20 800	23 300 *	23 300 *	23 300 *	70.0
74.0	47.9	77.6	14 800	22 900 *	18 500	22 900 *	22 400	22 900 *	74.0
78.0	44.7	73.5	13 000	22 500 *	16 600	22 500 *	20 100	22 500 *	78.0
82.0	41.4	68.9	11 400	20 600 *	14 700	22 200 *	18 100	22 200 *	82.0
86.0	37.7	63.7	9 900	17 800 *	13 100	22 000 *	16 300	22 000 *	86.0
90.0	33.8	57.7	8 500	15 300 *	11 600	21 800 *	14 700	21 800 *	90.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

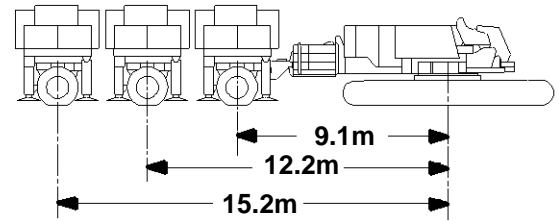

97.5m (320 Ft.) Boom

12.2m (40 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.8	111.0	33 500 *b	33 500 *b	33 500 *b	33 500 *b	33 500 *b	33 500 *b	22.9
24.0	80.2	110.8	33 100 *b	33 100 *b	33 100 *b	33 100 *b	33 100 *b	33 100 *b	24.0
26.0	79.1	110.4	32 500 *b	32 500 *b	32 500 *b	32 500 *b	32 500 *b	32 500 *b	26.0
28.0	78.1	109.9	31 800 *b	31 800 *b	31 800 *b	31 800 *b	31 800 *b	31 800 *b	28.0
30.0	77.0	109.4	31 300 *b	31 300 *b	31 300 *b	31 300 *b	31 300 *b	31 300 *b	30.0
32.0	75.9	108.8	30 700 *b	30 700 *b	30 700 *b	30 700 *b	30 700 *b	30 700 *b	32.0
34.0	74.8	108.2	30 100 *b	30 100 *b	30 100 *b	30 100 *b	30 100 *b	30 100 *b	34.0
36.0	73.7	107.6	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	36.0
38.0	72.6	106.9	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	38.0
40.0	71.5	106.2	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	40.0
42.0	70.4	105.4	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	42.0
44.0	69.3	104.6	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	44.0
46.0	68.1	103.7	27 400 *	27 400 *	27 400 *	27 400 *	27 400 *	27 400 *	46.0
50.0	65.9	101.9	26 600 *	26 600 *	26 600 *	26 600 *	26 600 *	26 600 *	50.0
54.0	63.5	99.8	25 900 *	25 900 *	25 900 *	25 900 *	25 900 *	25 900 *	54.0
58.0	61.1	97.5	23 100	25 300 *	25 300 *	25 300 *	25 300 *	25 300 *	58.0
62.0	58.6	95.0	20 100	24 700 *	24 500	24 700 *	24 700 *	24 700 *	62.0
66.0	56.1	92.3	17 500	24 200 *	21 800	24 200 *	24 200 *	24 200 *	66.0
70.0	53.5	89.2	15 200	23 700 *	19 200	23 700 *	23 300	23 700 *	70.0
74.0	50.8	85.9	13 200	23 200 *	17 000	23 200 *	20 800	23 200 *	74.0
78.0	48.0	82.2	11 400	21 500 *	15 000	22 800 *	18 600	22 800 *	78.0
82.0	45.0	78.1	9 800	19 400 *	13 200	22 500 *	16 600	22 500 *	82.0
86.0	41.8	73.6	8 300	16 700 *	11 500	22 200 *	14 800	22 200 *	86.0
90.0	38.5	68.5	6 900 *	14 100 *	10 000	21 400 *	13 100	22 000 *	90.0
94.0	34.8	62.7	5 400 *	11 800 *	8 600	18 700 *	11 600	21 800 *	94.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

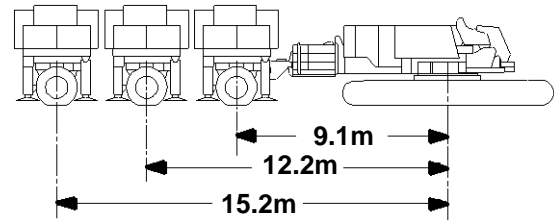

103.6m (340 Ft.) Boom

12.2m (40 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
24.4	80.5	116.9	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	24.4
26.0	79.7	116.6	32 800 *b	32 800 *b	32 800 *b	32 800 *b	32 800 *b	32 800 *b	26.0
28.0	78.7	116.1	32 200 *b	32 200 *b	32 200 *b	32 200 *b	32 200 *b	32 200 *b	28.0
30.0	77.7	115.7	31 600 *b	31 600 *b	31 600 *b	31 600 *b	31 600 *b	31 600 *b	30.0
32.0	76.7	115.1	31 000 *b	31 000 *b	31 000 *b	31 000 *b	31 000 *b	31 000 *b	32.0
34.0	75.6	114.6	30 500 *b	30 500 *b	30 500 *b	30 500 *b	30 500 *b	30 500 *b	34.0
36.0	74.6	114.0	30 000 *	30 000 *	30 000 *	30 000 *	30 000 *	30 000 *	36.0
38.0	73.6	113.3	29 500 *	29 500 *	29 500 *	29 500 *	29 500 *	29 500 *	38.0
40.0	72.5	112.6	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	40.0
42.0	71.5	111.9	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	42.0
44.0	70.4	111.2	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	44.0
46.0	69.4	110.4	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	46.0
50.0	67.2	108.6	27 000 *	27 000 *	27 000 *	27 000 *	27 000 *	27 000 *	50.0
54.0	65.0	106.7	26 100	26 400 *	26 400 *	26 400 *	26 400 *	26 400 *	54.0
58.0	62.8	104.6	22 700	25 700 *	25 700 *	25 700 *	25 700 *	25 700 *	58.0
62.0	60.5	102.2	19 800	25 100 *	24 500	25 100 *	25 100 *	25 100 *	62.0
66.0	58.2	99.7	17 300	24 600 *	21 500	24 600 *	24 600 *	24 600 *	66.0
70.0	55.8	96.9	15 000	24 000 *	19 000	24 000 *	23 000	24 000 *	70.0
74.0	53.3	93.8	13 000	23 400 *	16 700	23 600 *	20 500	23 600 *	74.0
78.0	50.7	90.5	11 200	21 200 *	14 700	23 200 *	18 300	23 200 *	78.0
82.0	48.0	86.8	9 500	19 200 *	12 900	22 800 *	16 300	22 800 *	82.0
86.0	45.2	82.8	8 000	17 100 *	11 300	22 500 *	14 500	22 500 *	86.0
90.0	42.3	78.3	6 500 *	14 500 *	9 800	21 000 *	12 800	22 200 *	90.0
94.0	39.1	73.3	5 000 *	12 200 *	8 400	19 200 *	11 300	22 000 *	94.0
98.0	35.7	67.7	3 600 *	10 100 *	7 100	16 700 *	9 900	21 800 *	98.0
102.0	32.0	61.3	2 300 *	8 000 *	5 700 *	14 300 *	8 600	19 300 *	102.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

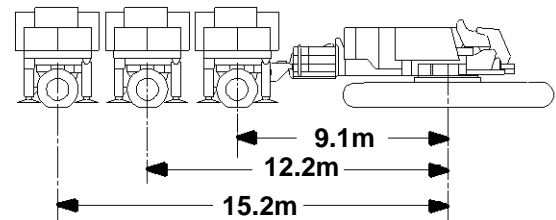

109.7m (360 Ft.) Boom
12.2m (40 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position	15.2m Position		Jib Oper. Rad. Meters
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
24.4	81.0	123.1	33 400 *b	33 400 *b	33 400 *b	24.4
26.0	80.2	122.8	32 900 *b	32 900 *b	32 900 *b	26.0
28.0	79.3	122.4	32 400 *b	32 400 *b	32 400 *b	28.0
30.0	78.3	121.9	31 800 *b	31 800 *b	31 800 *b	30.0
32.0	77.4	121.4	31 300 *b	31 300 *b	31 300 *b	32.0
34.0	76.4	120.9	30 800 *b	30 800 *b	30 800 *b	34.0
36.0	75.4	120.3	30 300 *b	30 300 *b	30 300 *b	36.0
38.0	74.4	119.7	29 900 *	29 900 *	29 900 *	38.0
40.0	73.4	119.1	29 400 *	29 400 *	29 400 *	40.0
42.0	72.5	118.4	29 000 *	29 000 *	29 000 *	42.0
44.0	71.5	117.7	28 600 *	28 600 *	28 600 *	44.0
46.0	70.5	116.9	28 200 *	28 200 *	28 200 *	46.0
50.0	68.4	115.3	27 400 *	27 400 *	27 400 *	50.0
54.0	66.4	113.5	26 700 *	26 700 *	26 700 *	54.0
58.0	64.3	111.5	26 100 *	26 100 *	26 100 *	58.0
62.0	62.1	109.3	25 500 *	25 500 *	25 500 *	62.0
66.0	60.0	106.9	24 900 *	24 900 *	24 900 *	66.0
70.0	57.7	104.3	24 400 *	22 900 *	24 400 *	70.0
74.0	55.4	101.5	23 900 *	20 400 *	23 900 *	74.0
78.0	53.1	98.4	23 500 *	18 200 *	23 500 *	78.0
82.0	50.6	95.1	23 100 *	16 200 *	23 100 *	82.0
86.0	48.1	91.4	22 700 *	14 400 *	22 800 *	86.0
90.0	45.4	87.4	21 000 *	12 800 *	22 500 *	90.0
94.0	42.6	83.0	19 200 *	11 300 *	22 200 *	94.0
98.0	39.7	78.1	17 500 *	9 900 *	21 900 *	98.0
102.0	36.5	72.7	15 200 *	8 600 *	19 600 *	102.0
106.0	33.1	66.5	13 000 *	7 400 *	16 700 *	106.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

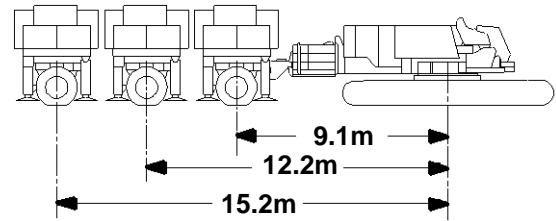

**115.8m (380 Ft.) Boom
12.2m (40 Ft.) Jib, 15 Degree Offset**

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
25.9	80.8	129.0	33 200 *b
26.0	80.7	129.0	33 100 *b
28.0	79.8	128.6	32 600 *b
30.0	78.9	128.2	32 100 *b
32.0	78.0	127.7	31 600 *b
34.0	77.0	127.2	31 100 *b
36.0	76.1	126.7	30 600 *b
38.0	75.2	126.1	30 200 *b
40.0	74.3	125.5	29 800 *
42.0	73.3	124.8	29 300 *
44.0	72.4	124.2	28 900 *
46.0	71.4	123.4	28 500 *
50.0	69.5	121.9	27 700 *
54.0	67.6	120.2	27 000 *
58.0	65.6	118.3	26 400 *
62.0	63.6	116.3	25 800 *
66.0	61.5	114.0	25 200 *
70.0	59.5	111.6	24 700 *
74.0	57.3	109.0	24 300 *
78.0	55.1	106.1	23 800 *
82.0	52.9	103.0	23 400 *
86.0	50.5	99.7	23 000 *
90.0	48.1	96.0	22 700 *
94.0	45.6	92.0	22 400 *
98.0	43.0	87.7	22 100 *
102.0	40.2	82.9	19 200 *
106.0	37.2	77.6	16 400 *
110.0	34.0	71.6	13 800 *

**121.9m (400 Ft.) Boom
12.2m (40 Ft.) Jib, 15 Degree Offset**


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
27.4	80.5	135.0	32 800 *b
28.0	80.3	134.8	32 700 *b
30.0	79.4	134.4	32 200 *b
32.0	78.5	134.0	31 700 *b
34.0	77.6	133.5	31 300 *b
36.0	76.8	133.0	30 900 *b
38.0	75.9	132.4	30 400 *b
40.0	75.0	131.9	29 900 *b
42.0	74.1	131.2	29 500 *
44.0	73.2	130.6	29 100 *
46.0	72.3	129.9	28 700 *
50.0	70.5	128.4	28 000 *
54.0	68.6	126.8	27 300 *
58.0	66.8	125.0	26 700 *
62.0	64.9	123.1	26 100 *
66.0	63.0	121.0	25 500 *
70.0	61.0	118.7	25 000 *
74.0	59.0	116.3	24 500 *
78.0	56.9	113.6	24 000 *
82.0	54.8	110.7	23 700 *
86.0	52.7	107.6	23 300 *
90.0	50.5	104.3	22 900 *
94.0	48.2	100.6	22 700 *
98.0	45.8	96.7	22 000 *
102.0	43.2	92.4	19 300 *
106.0	40.6	87.7	16 600 *
110.0	37.8	82.5	14 000 *
114.0	34.8	76.7	11 600 *

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

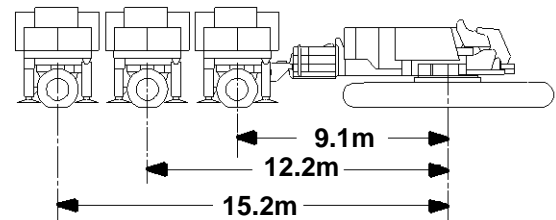

61.0m (200 Ft.) Boom

12.2m (40 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
19.8	80.4	73.4	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	19.8
20.0	80.2	73.3	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	20.0
22.0	78.6	72.8	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	22.0
24.0	76.9	72.2	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	24.0
26.0	75.3	71.5	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	26.0
28.0	73.6	70.7	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	28.0
30.0	71.9	69.9	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	30.0
32.0	70.1	69.0	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	32.0
34.0	68.4	68.1	18 200 *	18 200 *	18 200 *	18 200 *	18 200 *	18 200 *	34.0
36.0	66.6	67.0	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	36.0
38.0	64.8	65.9	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	38.0
40.0	63.0	64.7	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	40.0
42.0	61.1	63.4	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	42.0
44.0	59.2	62.0	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	44.0
46.0	57.2	60.6	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	46.0
50.0	53.1	57.2	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	50.0
54.0	48.7	53.4	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	54.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
 ANSI B30.5
 Requirements

MAX-ER 2000 On 2250

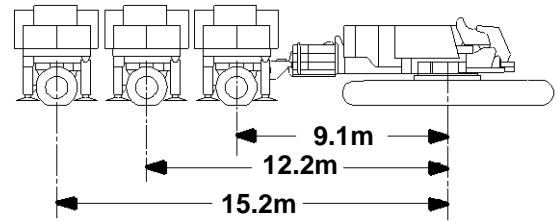

67.1m (220 Ft.) Boom

12.2m (40 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.0	79.3	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	21.3
22.0	79.5	79.1	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	22.0
24.0	78.0	78.5	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	24.0
26.0	76.5	77.9	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	26.0
28.0	74.9	77.2	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	28.0
30.0	73.4	76.5	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	30.0
32.0	71.8	75.7	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	32.0
34.0	70.2	74.8	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	34.0
36.0	68.6	73.9	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	36.0
38.0	67.0	72.9	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	38.0
40.0	65.3	71.8	17 400 *	17 400 *	17 400 *	17 400 *	17 400 *	17 400 *	40.0
42.0	63.6	70.6	17 000 *	17 000 *	17 000 *	17 000 *	17 000 *	17 000 *	42.0
44.0	61.9	69.4	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	44.0
46.0	60.2	68.1	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	46.0
50.0	56.6	65.1	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	50.0
54.0	52.8	61.8	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	54.0
58.0	48.7	58.0	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	58.0
62.0	44.4	53.5	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	62.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

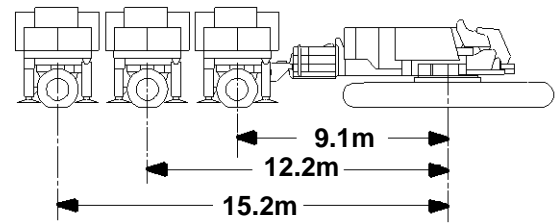

73.2m (240 Ft.) Boom

12.2m (40 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.7	85.5	23 100 *	23 100 *	23 100 *	23 100 *	23 100 *	23 100 *	21.3
22.0	80.3	85.4	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22.0
24.0	78.9	84.9	22 200 *	22 200 *	22 200 *	22 200 *	22 200 *	22 200 *	24.0
26.0	77.5	84.3	21 500 *	21 500 *	21 500 *	21 500 *	21 500 *	21 500 *	26.0
28.0	76.0	83.7	20 900 *	20 900 *	20 900 *	20 900 *	20 900 *	20 900 *	28.0
30.0	74.6	83.0	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	30.0
32.0	73.2	82.2	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	32.0
34.0	71.7	81.4	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	34.0
36.0	70.2	80.6	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	36.0
38.0	68.8	79.7	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	38.0
40.0	67.3	78.7	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	40.0
42.0	65.7	77.6	17 500 *	17 500 *	17 500 *	17 500 *	17 500 *	17 500 *	42.0
44.0	64.2	76.5	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	44.0
46.0	62.6	75.3	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	46.0
50.0	59.4	72.7	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	50.0
54.0	56.0	69.7	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	54.0
58.0	52.5	66.4	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	58.0
62.0	48.7	62.6	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	62.0
66.0	44.7	58.2	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	66.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

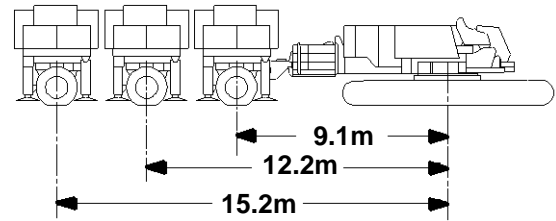

79.2m (260 Ft.) Boom

12.2m (40 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.4	91.4	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	22.9
24.0	79.6	91.1	22 600 *	22 600 *	22 600 *	22 600 *	22 600 *	22 600 *	24.0
26.0	78.3	90.6	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	26.0
28.0	77.0	90.0	21 400 *	21 400 *	21 400 *	21 400 *	21 400 *	21 400 *	28.0
30.0	75.7	89.4	20 800 *	20 800 *	20 800 *	20 800 *	20 800 *	20 800 *	30.0
32.0	74.4	88.7	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	32.0
34.0	73.0	88.0	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	34.0
36.0	71.7	87.2	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	36.0
38.0	70.3	86.3	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	38.0
40.0	68.9	85.4	18 400 *	18 400 *	18 400 *	18 400 *	18 400 *	18 400 *	40.0
42.0	67.5	84.5	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	42.0
44.0	66.1	83.4	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	44.0
46.0	64.7	82.4	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	46.0
50.0	61.7	80.0	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	50.0
54.0	58.7	77.3	16 000 *	16 000 *	16 000 *	16 000 *	16 000 *	16 000 *	54.0
58.0	55.5	74.3	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	58.0
62.0	52.2	71.0	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	62.0
66.0	48.8	67.2	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	66.0
70.0	45.1	62.9	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	70.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

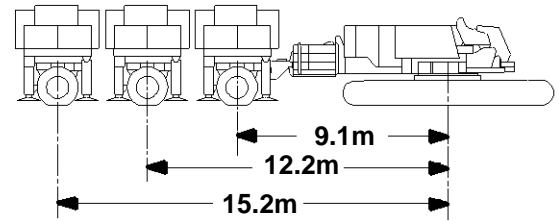

85.3m (280 Ft.) Boom

12.2m (40 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.9	97.7	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	22.9
24.0	80.2	97.5	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	24.0
26.0	79.0	97.0	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	26.0
28.0	77.8	96.4	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	28.0
30.0	76.6	95.8	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	30.0
32.0	75.3	95.2	24 600 *	24 600 *	24 600 *	24 600 *	24 600 *	24 600 *	32.0
34.0	74.1	94.5	24 100 *	24 100 *	24 100 *	24 100 *	24 100 *	24 100 *	34.0
36.0	72.8	93.8	23 500 *	23 500 *	23 500 *	23 500 *	23 500 *	23 500 *	36.0
38.0	71.6	93.0	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	38.0
40.0	70.3	92.2	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	40.0
42.0	69.0	91.3	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	42.0
44.0	67.7	90.3	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	44.0
46.0	66.3	89.3	21 200 *	21 200 *	21 200 *	21 200 *	21 200 *	21 200 *	46.0
50.0	63.7	87.1	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	50.0
54.0	60.9	84.7	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	54.0
58.0	58.0	82.0	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	58.0
62.0	55.1	79.0	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	62.0
66.0	52.0	75.6	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	66.0
70.0	48.7	71.8	17 400 *	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	70.0
74.0	45.3	67.6	15 300 *	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	74.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

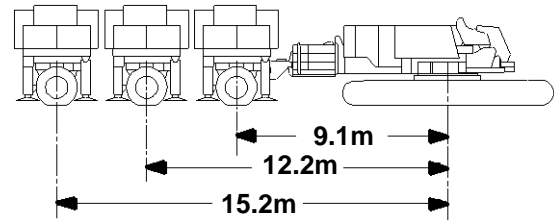

91.4m (300 Ft.) Boom

12.2m (40 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
24.4	80.6	103.6	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	24.4
26.0	79.7	103.2	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	26.0
28.0	78.5	102.7	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	28.0
30.0	77.4	102.2	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	30.0
32.0	76.2	101.6	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	32.0
34.0	75.1	100.9	24 500 *	24 500 *	24 500 *	24 500 *	24 500 *	24 500 *	34.0
36.0	73.9	100.3	24 000 *	24 000 *	24 000 *	24 000 *	24 000 *	24 000 *	36.0
38.0	72.7	99.5	23 500 *	23 500 *	23 500 *	23 500 *	23 500 *	23 500 *	38.0
40.0	71.5	98.8	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	40.0
42.0	70.3	97.9	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	42.0
44.0	69.1	97.0	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	44.0
46.0	67.9	96.1	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	46.0
50.0	65.4	94.1	20 900 *	20 900 *	20 900 *	20 900 *	20 900 *	20 900 *	50.0
54.0	62.8	91.9	20 200 *	20 200 *	20 200 *	20 200 *	20 200 *	20 200 *	54.0
58.0	60.2	89.4	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	58.0
62.0	57.5	86.6	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	62.0
66.0	54.7	83.6	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	66.0
70.0	51.8	80.2	17 100	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	70.0
74.0	48.8	76.4	15 000	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	74.0
78.0	45.5	72.3	13 200	17 200 *	16 800	17 200 *	17 200 *	17 200 *	78.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

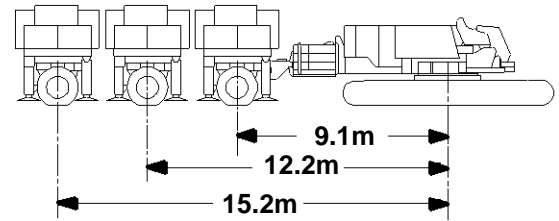

97.5m (320 Ft.) Boom

12.2m (40 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.3	109.5	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25.9
26.0	80.3	109.5	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	26.0
28.0	79.2	109.0	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	28.0
30.0	78.1	108.5	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	30.0
32.0	77.0	107.9	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	32.0
34.0	75.9	107.3	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	34.0
36.0	74.8	106.7	24 400 *	24 400 *	24 400 *	24 400 *	24 400 *	24 400 *	36.0
38.0	73.7	106.0	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	38.0
40.0	72.6	105.3	23 400 *	23 400 *	23 400 *	23 400 *	23 400 *	23 400 *	40.0
42.0	71.5	104.5	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	42.0
44.0	70.3	103.7	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	44.0
46.0	69.2	102.8	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	46.0
50.0	66.9	100.9	21 400 *	21 400 *	21 400 *	21 400 *	21 400 *	21 400 *	50.0
54.0	64.5	98.9	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	54.0
58.0	62.1	96.6	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	58.0
62.0	59.6	94.0	19 400 *	19 400 *	19 400 *	19 400 *	19 400 *	19 400 *	62.0
66.0	57.0	91.2	18 000 *	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	66.0
70.0	54.4	88.2	15 700 *	18 400 *	18 400 *	18 400 *	18 400 *	18 400 *	70.0
74.0	51.6	84.8	13 600 *	18 000 *	17 400 *	18 000 *	18 000 *	18 000 *	74.0
78.0	48.8	81.0	11 700 *	17 600 *	15 300 *	17 600 *	17 600 *	17 600 *	78.0
82.0	45.8	76.9	10 100 *	17 200 *	13 400 *	17 200 *	16 800 *	17 200 *	82.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

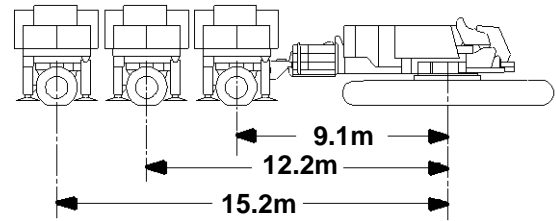

103.6m (340 Ft.) Boom

12.2m (40 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.8	115.8	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25.9
26.0	80.8	115.7	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	26.0
28.0	79.8	115.3	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	28.0
30.0	78.8	114.8	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	30.0
32.0	77.7	114.3	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	32.0
34.0	76.7	113.7	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	34.0
36.0	75.7	113.1	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	36.0
38.0	74.6	112.4	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	38.0
40.0	73.6	111.8	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	40.0
42.0	72.5	111.0	23 400 *	23 400 *	23 400 *	23 400 *	23 400 *	23 400 *	42.0
44.0	71.4	110.3	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	44.0
46.0	70.4	109.4	22 600 *	22 600 *	22 600 *	22 600 *	22 600 *	22 600 *	46.0
50.0	68.2	107.7	21 800 *	21 800 *	21 800 *	21 800 *	21 800 *	21 800 *	50.0
54.0	66.0	105.7	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	54.0
58.0	63.7	103.6	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	58.0
62.0	61.4	101.2	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	62.0
66.0	59.1	98.7	17 700	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	66.0
70.0	56.6	95.8	15 400	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	70.0
74.0	54.1	92.8	13 300	18 400 *	17 100	18 400 *	18 400 *	18 400 *	74.0
78.0	51.5	89.4	11 500	18 000 *	15 000	18 000 *	18 000 *	18 000 *	78.0
82.0	48.8	85.6	9 800	17 600 *	13 200	17 600 *	16 600	17 600 *	82.0
86.0	45.9	81.6	8 300	17 200 *	11 500	17 300 *	14 700	17 300 *	86.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

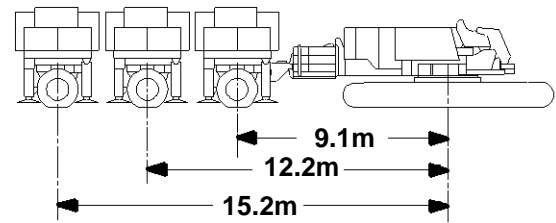

109.7m (360 Ft.) Boom
12.2m (40 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position	15.2m Position		Jib Oper. Rad. Meters
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
27.4	80.6	121.7	25 100 *	25 100 *	25 100 *	27.4
28.0	80.3	121.5	25 100 *	25 100 *	25 100 *	28.0
30.0	79.3	121.1	25 100 *	25 100 *	25 100 *	30.0
32.0	78.4	120.6	25 100 *	25 100 *	25 100 *	32.0
34.0	77.4	120.0	25 100 *	25 100 *	25 100 *	34.0
36.0	76.4	119.5	25 100 *	25 100 *	25 100 *	36.0
38.0	75.4	118.8	24 700 *	24 700 *	24 700 *	38.0
40.0	74.4	118.2	24 300 *	24 300 *	24 300 *	40.0
42.0	73.4	117.5	23 800 *	23 800 *	23 800 *	42.0
44.0	72.4	116.8	23 400 *	23 400 *	23 400 *	44.0
46.0	71.4	116.0	23 000 *	23 000 *	23 000 *	46.0
50.0	69.4	114.4	22 200 *	22 200 *	22 200 *	50.0
54.0	67.3	112.5	21 500 *	21 500 *	21 500 *	54.0
58.0	65.2	110.5	20 900 *	20 900 *	20 900 *	58.0
62.0	63.0	108.3	20 300 *	20 300 *	20 300 *	62.0
66.0	60.8	105.9	19 800 *	19 800 *	19 800 *	66.0
70.0	58.6	103.3	19 200 *	19 200 *	19 200 *	70.0
74.0	56.2	100.5	18 800 *	18 800 *	18 800 *	74.0
78.0	53.8	97.3	18 300 *	18 300 *	18 300 *	78.0
82.0	51.4	94.0	18 000 *	16 600	18 000 *	82.0
86.0	48.8	90.3	17 600 *	14 700	17 600 *	86.0
90.0	46.1	86.2	17 300 *	13 000	17 300 *	90.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

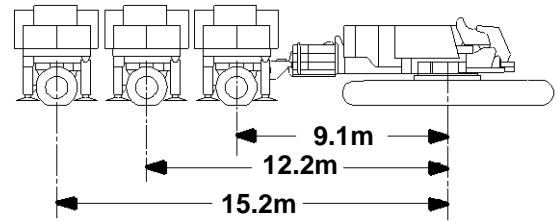

**115.8m (380 Ft.) Boom
12.2m (40 Ft.) Jib, 30 Degree Offset**

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
27.4	81.0	127.9	25 100 *
28.0	80.8	127.8	25 100 *
30.0	79.9	127.3	25 100 *
32.0	78.9	126.8	25 100 *
34.0	78.0	126.3	25 100 *
36.0	77.1	125.8	25 100 *
38.0	76.1	125.2	25 100 *
40.0	75.2	124.6	24 600 *
42.0	74.3	123.9	24 200 *
44.0	73.3	123.3	23 800 *
46.0	72.3	122.5	23 400 *
50.0	70.4	121.0	22 600 *
54.0	68.5	119.2	21 900 *
58.0	66.5	117.4	21 300 *
62.0	64.4	115.3	20 700 *
66.0	62.4	113.0	20 100 *
70.0	60.3	110.6	19 600 *
74.0	58.1	107.9	19 100 *
78.0	55.9	105.1	18 700 *
82.0	53.6	101.9	18 300 *
86.0	51.3	98.5	17 900 *
90.0	48.8	94.9	17 600 *
94.0	46.3	90.8	17 300 *

**121.9m (400 Ft.) Boom
12.2m (40 Ft.) Jib, 30 Degree Offset**


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
29.0	80.8	133.8	25 100 *
30.0	80.3	133.6	25 100 *
32.0	79.4	133.1	25 100 *
34.0	78.6	132.6	25 100 *
36.0	77.7	132.1	25 100 *
38.0	76.8	131.6	25 100 *
40.0	75.9	131.0	25 000 *
42.0	75.0	130.4	24 500 *
44.0	74.1	129.7	24 100 *
46.0	73.2	129.0	23 800 *
50.0	71.4	127.5	23 000 *
54.0	69.5	125.9	22 300 *
58.0	67.6	124.1	21 700 *
62.0	65.7	122.2	21 000 *
66.0	63.8	120.0	20 500 *
70.0	61.8	117.8	20 000 *
74.0	59.8	115.3	19 500 *
78.0	57.7	112.6	19 100 *
82.0	55.6	109.7	18 700 *
86.0	53.4	106.5	18 300 *
90.0	51.1	103.1	18 000 *
94.0	48.8	99.5	17 600 *
98.0	46.4	95.5	17 300 *
102.0	43.8	91.1	17 100 *

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

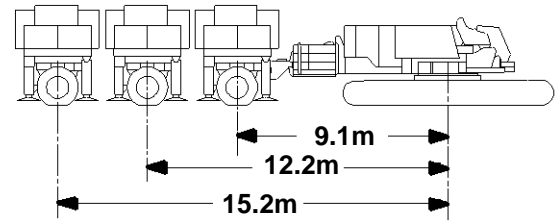

61.0m (200 Ft.) Boom
18.3m (60 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
16.8	80.7	81.5	34 600 *b	34 600 *b	34 600 *b	34 600 *b	34 600 *b	34 600 *b	16.8
18.0	79.8	81.3	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	18.0
20.0	78.3	80.8	33 500 *b	33 500 *b	33 500 *b	33 500 *b	33 500 *b	33 500 *b	20.0
22.0	76.9	80.3	32 900 *	32 900 *	32 900 *	32 900 *	32 900 *	32 900 *	22.0
24.0	75.4	79.8	32 300 *	32 300 *	32 300 *	32 300 *	32 300 *	32 300 *	24.0
26.0	73.9	79.1	31 800 *	31 800 *	31 800 *	31 800 *	31 800 *	31 800 *	26.0
28.0	72.4	78.5	31 200 *	31 200 *	31 200 *	31 200 *	31 200 *	31 200 *	28.0
30.0	70.8	77.7	30 700 *	30 700 *	30 700 *	30 700 *	30 700 *	30 700 *	30.0
32.0	69.3	76.9	30 300 *	30 300 *	30 300 *	30 300 *	30 300 *	30 300 *	32.0
34.0	67.7	76.1	29 800 *	29 800 *	29 800 *	29 800 *	29 800 *	29 800 *	34.0
36.0	66.1	75.2	29 400 *	29 400 *	29 400 *	29 400 *	29 400 *	29 400 *	36.0
38.0	64.5	74.2	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	38.0
40.0	62.9	73.1	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	40.0
42.0	61.3	72.0	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	42.0
44.0	59.6	70.8	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	44.0
46.0	57.9	69.5	26 600 *	26 600 *	26 600 *	26 600 *	26 600 *	26 600 *	46.0
50.0	54.4	66.6	24 500 *	24 500 *	24 500 *	24 500 *	24 500 *	24 500 *	50.0
54.0	50.7	63.3	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	54.0
58.0	46.7	59.6	21 200 *	21 200 *	21 200 *	21 200 *	21 200 *	21 200 *	58.0
62.0	42.5	55.3	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	62.0
66.0	37.9	50.3	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	66.0
70.0	32.7	44.3	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	70.0
74.0	26.6	36.7	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	74.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

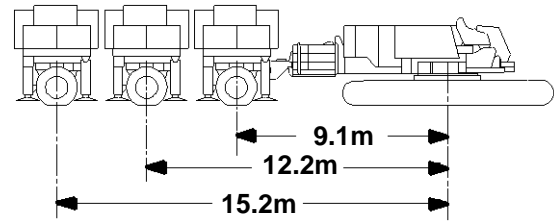

67.1m (220 Ft.) Boom

18.3m (60 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
18.3	80.4	87.4	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	18.3
20.0	79.2	87.1	33 700 *b	33 700 *b	33 700 *b	33 700 *b	33 700 *b	33 700 *b	20.0
22.0	77.8	86.6	33 100 *b	33 100 *b	33 100 *b	33 100 *b	33 100 *b	33 100 *b	22.0
24.0	76.4	86.1	32 500 *	32 500 *	32 500 *	32 500 *	32 500 *	32 500 *	24.0
26.0	75.1	85.5	32 000 *	32 000 *	32 000 *	32 000 *	32 000 *	32 000 *	26.0
28.0	73.7	84.9	31 500 *	31 500 *	31 500 *	31 500 *	31 500 *	31 500 *	28.0
30.0	72.3	84.2	31 000 *	31 000 *	31 000 *	31 000 *	31 000 *	31 000 *	30.0
32.0	70.8	83.5	30 600 *	30 600 *	30 600 *	30 600 *	30 600 *	30 600 *	32.0
34.0	69.4	82.7	30 200 *	30 200 *	30 200 *	30 200 *	30 200 *	30 200 *	34.0
36.0	68.0	81.9	29 700 *	29 700 *	29 700 *	29 700 *	29 700 *	29 700 *	36.0
38.0	66.5	81.0	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	38.0
40.0	65.0	80.0	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	40.0
42.0	63.5	79.0	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	42.0
44.0	62.0	77.9	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	44.0
46.0	60.4	76.7	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	46.0
50.0	57.3	74.1	26 200 *	26 200 *	26 200 *	26 200 *	26 200 *	26 200 *	50.0
54.0	54.0	71.2	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	54.0
58.0	50.5	67.9	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	58.0
62.0	46.9	64.2	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	62.0
66.0	43.0	60.0	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	66.0
70.0	38.8	55.1	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	70.0
74.0	34.1	49.4	17 000	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	74.0
78.0	28.8	42.4	15 200	17 000 *	17 000 *	17 000 *	17 000 *	17 000 *	78.0
82.0	22.2	33.4	13 500	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	82.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

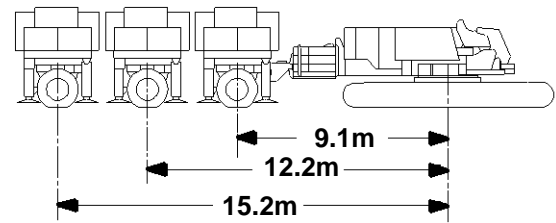

73.2m (240 Ft.) Boom
18.3m (60 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
18.3	81.0	93.6	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	34 200 *b	18.3
20.0	79.9	93.3	33 800 *b	33 800 *b	33 800 *b	33 800 *b	33 800 *b	33 800 *b	20.0
22.0	78.6	92.9	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	22.0
24.0	77.4	92.4	32 700 *	32 700 *	32 700 *	32 700 *	32 700 *	32 700 *	24.0
26.0	76.1	91.9	32 200 *	32 200 *	32 200 *	32 200 *	32 200 *	32 200 *	26.0
28.0	74.8	91.3	31 700 *	31 700 *	31 700 *	31 700 *	31 700 *	31 700 *	28.0
30.0	73.5	90.7	31 300 *	31 300 *	31 300 *	31 300 *	31 300 *	31 300 *	30.0
32.0	72.2	90.0	30 800 *	30 800 *	30 800 *	30 800 *	30 800 *	30 800 *	32.0
34.0	70.8	89.3	30 400 *	30 400 *	30 400 *	30 400 *	30 400 *	30 400 *	34.0
36.0	69.5	88.5	30 100 *	30 100 *	30 100 *	30 100 *	30 100 *	30 100 *	36.0
38.0	68.1	87.6	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	38.0
40.0	66.8	86.7	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	40.0
42.0	65.4	85.8	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	42.0
44.0	64.0	84.8	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	44.0
46.0	62.6	83.7	28 300 *	28 300 *	28 300 *	28 300 *	28 300 *	28 300 *	46.0
50.0	59.7	81.4	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	50.0
54.0	56.7	78.8	25 800 *	25 800 *	25 800 *	25 800 *	25 800 *	25 800 *	54.0
58.0	53.7	75.8	24 100 *	24 100 *	24 100 *	24 100 *	24 100 *	24 100 *	58.0
62.0	50.4	72.5	22 500 *	22 600 *	22 600 *	22 600 *	22 600 *	22 600 *	62.0
66.0	47.0	68.8	20 100 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	66.0
70.0	43.4	64.7	17 900 *	20 100 *	20 100 *	20 100 *	20 100 *	20 100 *	70.0
74.0	39.6	59.9	15 900 *	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	74.0
78.0	35.3	54.4	14 100 *	18 200 *	17 600 *	18 200 *	18 200 *	18 200 *	78.0
82.0	30.6	47.9	12 500 *	17 300 *	15 900 *	17 300 *	17 300 *	17 300 *	82.0
86.0	24.9	39.8	11 000 *	16 500 *	14 200 *	16 600 *	16 600 *	16 600 *	86.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

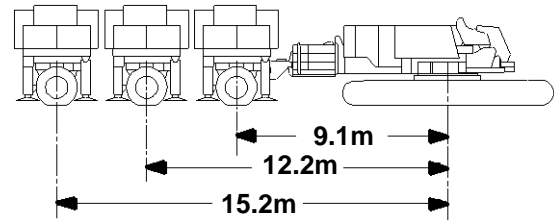

79.2m (260 Ft.) Boom

18.3m (60 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
19.8	80.7	99.5	33 700 *b	33 700 *b	33 700 *b	33 700 *b	33 700 *b	33 700 *b	19.8
20.0	80.5	99.5	33 700 *b	33 700 *b	33 700 *b	33 700 *b	33 700 *b	33 700 *b	20.0
22.0	79.4	99.1	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	33 200 *b	22.0
24.0	78.2	98.6	32 700 *	32 700 *	32 700 *	32 700 *	32 700 *	32 700 *	24.0
26.0	77.0	98.2	32 300 *	32 300 *	32 300 *	32 300 *	32 300 *	32 300 *	26.0
28.0	75.7	97.6	31 800 *	31 800 *	31 800 *	31 800 *	31 800 *	31 800 *	28.0
30.0	74.5	97.0	31 400 *	31 400 *	31 400 *	31 400 *	31 400 *	31 400 *	30.0
32.0	73.3	96.4	31 000 *	31 000 *	31 000 *	31 000 *	31 000 *	31 000 *	32.0
34.0	72.1	95.7	30 600 *	30 600 *	30 600 *	30 600 *	30 600 *	30 600 *	34.0
36.0	70.8	95.0	30 200 *	30 200 *	30 200 *	30 200 *	30 200 *	30 200 *	36.0
38.0	69.6	94.2	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	38.0
40.0	68.3	93.4	29 500 *	29 500 *	29 500 *	29 500 *	29 500 *	29 500 *	40.0
42.0	67.0	92.5	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	42.0
44.0	65.8	91.6	28 800 *	28 800 *	28 800 *	28 800 *	28 800 *	28 800 *	44.0
46.0	64.5	90.6	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	46.0
50.0	61.8	88.5	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	50.0
54.0	59.1	86.1	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	54.0
58.0	56.3	83.4	25 200 *	25 600 *	25 600 *	25 600 *	25 600 *	25 600 *	58.0
62.0	53.4	80.4	22 400 *	24 100 *	24 100 *	24 100 *	24 100 *	24 100 *	62.0
66.0	50.3	77.1	19 800 *	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	66.0
70.0	47.2	73.5	17 600 *	21 400 *	21 400 *	21 400 *	21 400 *	21 400 *	70.0
74.0	43.8	69.3	15 600 *	20 300 *	19 400 *	20 300 *	20 300 *	20 300 *	74.0
78.0	40.2	64.7	13 900 *	19 200 *	17 400 *	19 200 *	19 200 *	19 200 *	78.0
82.0	36.3	59.3	12 200 *	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	82.0
86.0	32.0	53.1	10 700 *	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	86.0
90.0	27.1	45.7	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	90.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

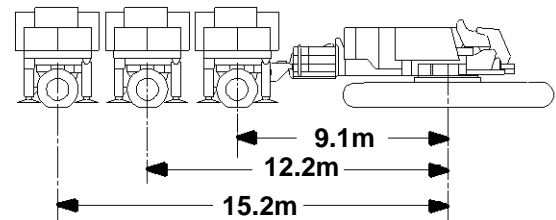

85.3m (280 Ft.) Boom
 18.3m (60 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.7	105.4	32 700 *b	32 700 *b	32 700 *b	32 700 *b	32 700 *b	32 700 *b	21.3
22.0	80.3	105.3	32 500 *b	32 500 *b	32 500 *b	32 500 *b	32 500 *b	32 500 *b	22.0
24.0	79.2	104.8	32 100 *b	32 100 *b	32 100 *b	32 100 *b	32 100 *b	32 100 *b	24.0
26.0	78.1	104.4	31 700 *	31 700 *	31 700 *	31 700 *	31 700 *	31 700 *	26.0
28.0	76.9	103.9	31 300 *	31 300 *	31 300 *	31 300 *	31 300 *	31 300 *	28.0
30.0	75.8	103.3	31 000 *	31 000 *	31 000 *	31 000 *	31 000 *	31 000 *	30.0
32.0	74.6	102.7	30 600 *	30 600 *	30 600 *	30 600 *	30 600 *	30 600 *	32.0
34.0	73.5	102.1	30 300 *	30 300 *	30 300 *	30 300 *	30 300 *	30 300 *	34.0
36.0	72.3	101.4	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	36.0
38.0	71.2	100.7	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	38.0
40.0	70.0	99.9	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	40.0
42.0	68.8	99.1	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	42.0
44.0	67.6	98.2	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	44.0
46.0	66.4	97.3	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	46.0
50.0	63.9	95.3	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	50.0
54.0	61.4	93.1	27 400 *	27 400 *	27 400 *	27 400 *	27 400 *	27 400 *	54.0
58.0	58.8	90.7	25 300 *	26 900 *	26 900 *	26 900 *	26 900 *	26 900 *	58.0
62.0	56.2	88.0	22 400 *	26 500 *	26 500 *	26 500 *	26 500 *	26 500 *	62.0
66.0	53.4	85.0	19 900 *	25 400 *	24 100 *	25 400 *	25 400 *	25 400 *	66.0
70.0	50.6	81.7	17 600 *	24 000 *	21 600 *	24 000 *	24 000 *	24 000 *	70.0
74.0	47.6	78.0	15 600 *	22 800 *	19 400 *	22 800 *	22 800 *	22 800 *	74.0
78.0	44.4	73.9	13 800 *	21 700 *	17 400 *	21 700 *	21 000 *	21 700 *	78.0
82.0	41.1	69.3	12 300 *	20 700 *	15 600 *	20 700 *	19 100 *	20 700 *	82.0
86.0	37.5	64.1	10 800 *	18 800 *	14 000 *	19 900 *	17 300 *	19 900 *	86.0
90.0	33.5	58.2	9 400 *	16 300 *	12 500 *	19 100 *	15 600 *	19 100 *	90.0
94.0	29.1	51.2	8 200 *	14 000 *	11 200 *	18 400 *	14 100 *	18 400 *	94.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

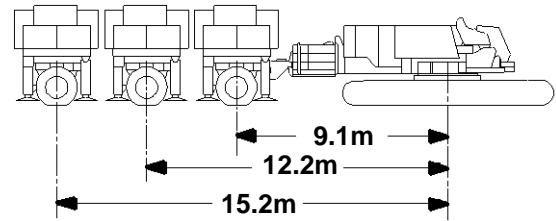

91.4m (300 Ft.) Boom

18.3m (60 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.4	111.3	32 200 *b	32 200 *b	32 200 *b	32 200 *b	32 200 *b	32 200 *b	22.9
24.0	79.8	111.1	32 000 *b	32 000 *b	32 000 *b	32 000 *b	32 000 *b	32 000 *b	24.0
26.0	78.7	110.6	31 600 *	31 600 *	31 600 *	31 600 *	31 600 *	31 600 *	26.0
28.0	77.7	110.2	31 300 *	31 300 *	31 300 *	31 300 *	31 300 *	31 300 *	28.0
30.0	76.6	109.6	30 900 *	30 900 *	30 900 *	30 900 *	30 900 *	30 900 *	30.0
32.0	75.5	109.1	30 600 *	30 600 *	30 600 *	30 600 *	30 600 *	30 600 *	32.0
34.0	74.4	108.5	30 300 *	30 300 *	30 300 *	30 300 *	30 300 *	30 300 *	34.0
36.0	73.3	107.9	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	36.0
38.0	72.2	107.2	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	29 600 *	38.0
40.0	71.1	106.5	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	40.0
42.0	70.0	105.7	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	42.0
44.0	68.9	104.9	28 800 *	28 800 *	28 800 *	28 800 *	28 800 *	28 800 *	44.0
46.0	67.8	104.0	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	46.0
50.0	65.5	102.2	28 000 *	28 000 *	28 000 *	28 000 *	28 000 *	28 000 *	50.0
54.0	63.1	100.1	27 500 *	27 500 *	27 500 *	27 500 *	27 500 *	27 500 *	54.0
58.0	60.8	97.8	25 000	27 100 *	27 100 *	27 100 *	27 100 *	27 100 *	58.0
62.0	58.3	95.3	22 100	26 700 *	26 500	26 700 *	26 700 *	26 700 *	62.0
66.0	55.8	92.6	19 500	26 300 *	23 800	26 300 *	26 300 *	26 300 *	66.0
70.0	53.2	89.6	17 300	25 300 *	21 300	25 300 *	25 300 *	25 300 *	70.0
74.0	50.5	86.3	15 300	24 000 *	19 100	24 000 *	22 900	24 000 *	74.0
78.0	47.7	82.6	13 500	22 900 *	17 100	22 900 *	20 700	22 900 *	78.0
82.0	44.7	78.5	11 900	21 700 *	15 300	21 800 *	18 700	21 800 *	82.0
86.0	41.6	74.0	10 500	19 200 *	13 700	20 900 *	16 900	20 900 *	86.0
90.0	38.2	69.0	9 100	16 700 *	12 200	20 000 *	15 300	20 000 *	90.0
94.0	34.6	63.2	7 900	14 500 *	10 900	19 300 *	13 800	19 300 *	94.0
98.0	30.6	56.6	6 800	12 300 *	9 600	18 600 *	12 400	18 600 *	98.0
102.0	25.9	48.6	5 700	10 300 *	8 400	16 400 *	11 100	17 800 *	102.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

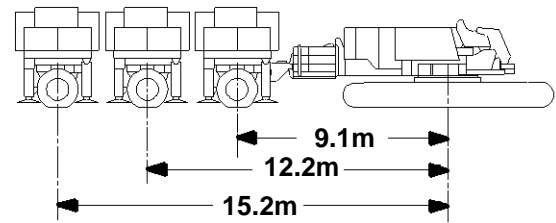

97.5m (320 Ft.) Boom
18.3m (60 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.9	117.5	32 200 *b	32 200 *b	32 200 *b	32 200 *b	32 200 *b	32 200 *b	22.9
24.0	80.3	117.3	32 000 *b	32 000 *b	32 000 *b	32 000 *b	32 000 *b	32 000 *b	24.0
26.0	79.3	116.9	31 600 *b	31 600 *b	31 600 *b	31 600 *b	31 600 *b	31 600 *b	26.0
28.0	78.3	116.4	31 300 *	31 300 *	31 300 *	31 300 *	31 300 *	31 300 *	28.0
30.0	77.3	115.9	31 000 *	31 000 *	31 000 *	31 000 *	31 000 *	31 000 *	30.0
32.0	76.3	115.4	30 700 *	30 700 *	30 700 *	30 700 *	30 700 *	30 700 *	32.0
34.0	75.3	114.9	30 300 *	30 300 *	30 300 *	30 300 *	30 300 *	30 300 *	34.0
36.0	74.2	114.3	30 000 *	30 000 *	30 000 *	30 000 *	30 000 *	30 000 *	36.0
38.0	73.2	113.6	29 800 *	29 800 *	29 800 *	29 800 *	29 800 *	29 800 *	38.0
40.0	72.2	112.9	29 500 *	29 500 *	29 500 *	29 500 *	29 500 *	29 500 *	40.0
42.0	71.1	112.2	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	42.0
44.0	70.1	111.5	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	44.0
46.0	69.0	110.7	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	46.0
50.0	66.9	108.9	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	50.0
54.0	64.7	107.0	26 900 *	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	54.0
58.0	62.4	104.9	23 500 *	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	58.0
62.0	60.2	102.5	20 600 *	26 900 *	25 100 *	26 900 *	26 900 *	26 900 *	62.0
66.0	57.8	100.0	18 000 *	26 500 *	22 300 *	26 500 *	26 400 *	26 500 *	66.0
70.0	55.4	97.2	15 800 *	26 200 *	19 800 *	26 200 *	23 800 *	26 200 *	70.0
74.0	53.0	94.2	13 800 *	24 300 *	17 500 *	25 100 *	21 400 *	25 100 *	74.0
78.0	50.4	90.8	12 000 *	22 100 *	15 600 *	24 000 *	19 100 *	24 000 *	78.0
82.0	47.7	87.2	10 400 *	20 000 *	13 800 *	22 900 *	17 200 *	22 900 *	82.0
86.0	44.9	83.2	8 900 *	18 000 *	12 100 *	21 900 *	15 400 *	21 900 *	86.0
90.0	42.0	78.7	7 600 *	15 500 *	10 700 *	21 000 *	13 800 *	21 000 *	90.0
94.0	38.9	73.8	6 200 *	13 200 *	9 300 *	20 100 *	12 300 *	20 200 *	94.0
98.0	35.5	68.2	4 900 *	11 100 *	8 100 *	17 700 *	10 900 *	19 500 *	98.0
102.0	31.8	61.9	3 600 *	9 100 *	6 900 *	15 400 *	9 600 *	18 800 *	102.0
106.0	27.6	54.4	2 400 *	7 200 *	5 700 *	13 200 *	8 400 *	18 200 *	106.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

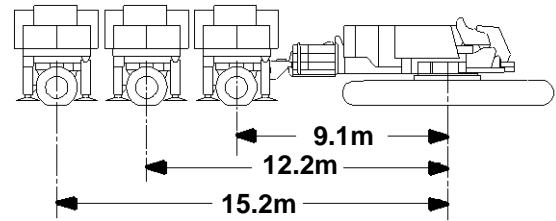

103.6m (340 Ft.) Boom
18.3m (60 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
24.4	80.6	123.4	31 700 *b	31 700 *b	31 700 *b	31 700 *b	31 700 *b	24.4
26.0	79.9	123.1	31 400 *b	31 400 *b	31 400 *b	31 400 *b	31 400 *b	26.0
28.0	78.9	122.7	31 100 *b	31 100 *b	31 100 *b	31 100 *b	31 100 *b	28.0
30.0	78.0	122.2	30 800 *	30 800 *	30 800 *	30 800 *	30 800 *	30.0
32.0	77.0	121.7	30 500 *	30 500 *	30 500 *	30 500 *	30 500 *	32.0
34.0	76.0	121.2	30 200 *	30 200 *	30 200 *	30 200 *	30 200 *	34.0
36.0	75.1	120.6	29 900 *	29 900 *	29 900 *	29 900 *	29 900 *	36.0
38.0	74.1	120.0	29 700 *	29 700 *	29 700 *	29 700 *	29 700 *	38.0
40.0	73.1	119.4	29 400 *	29 400 *	29 400 *	29 400 *	29 400 *	40.0
42.0	72.1	118.7	29 200 *	29 200 *	29 200 *	29 200 *	29 200 *	42.0
44.0	71.1	118.0	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	44.0
46.0	70.1	117.2	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	46.0
50.0	68.1	115.6	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	50.0
54.0	66.0	113.8	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	54.0
58.0	63.9	111.8	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	58.0
62.0	61.8	109.6	27 000 *	24 800	27 000 *	27 000 *	27 000 *	62.0
66.0	59.6	107.2	26 600 *	21 900	26 600 *	26 300	26 600 *	66.0
70.0	57.4	104.7	26 300 *	19 400	26 300 *	23 500	26 300 *	70.0
74.0	55.1	101.8	23 900 *	17 200	26 000 *	21 000	26 000 *	74.0
78.0	52.8	98.8	21 700 *	15 200	25 000 *	18 800	25 000 *	78.0
82.0	50.3	95.4	19 700 *	13 400	23 900 *	16 800	23 900 *	82.0
86.0	47.8	91.8	17 800 *	11 800	22 900 *	15 000	22 900 *	86.0
90.0	45.2	87.8	15 800 *	10 300	21 600 *	13 400	22 000 *	90.0
94.0	42.4	83.4	13 500 *	8 900	19 800 *	11 900	21 100 *	94.0
98.0	39.4	78.6	11 400 *	7 700	18 100 *	10 500	20 300 *	98.0
102.0	36.3	73.2	9 400 *	6 600	15 800 *	9 300	19 600 *	102.0
106.0	32.9	67.1	7 600 *	5 300 *	13 700 *	8 100	18 700 *	106.0
110.0	29.1	60.0	5 900 *	4 000 *	11 700 *	7 000	16 200 *	110.0
114.0	24.7	51.6	4 200 *	2 900 *	9 700 *	6 000	13 800 *	114.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

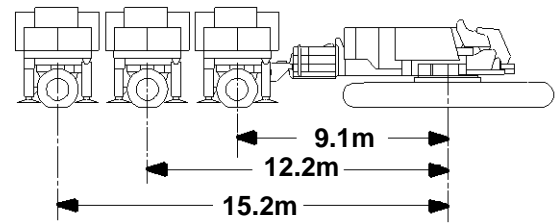

109.7m (360 Ft.) Boom
18.3m (60 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position	15.2m Position		Jib Oper. Rad. Meters
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.4	129.3	31 000 *b	31 000 *b	31 000 *b	25.9
26.0	80.4	129.3	31 000 *b	31 000 *b	31 000 *b	26.0
28.0	79.5	128.9	30 700 *b	30 700 *b	30 700 *b	28.0
30.0	78.5	128.5	30 400 *	30 400 *	30 400 *	30.0
32.0	77.6	128.0	30 200 *	30 200 *	30 200 *	32.0
34.0	76.7	127.5	29 900 *	29 900 *	29 900 *	34.0
36.0	75.8	127.0	29 600 *	29 600 *	29 600 *	36.0
38.0	74.9	126.4	29 400 *	29 400 *	29 400 *	38.0
40.0	73.9	125.8	29 200 *	29 200 *	29 200 *	40.0
42.0	73.0	125.1	28 900 *	28 900 *	28 900 *	42.0
44.0	72.0	124.5	28 700 *	28 700 *	28 700 *	44.0
46.0	71.1	123.7	28 500 *	28 500 *	28 500 *	46.0
50.0	69.2	122.2	28 100 *	28 100 *	28 100 *	50.0
54.0	67.2	120.5	27 600 *	27 600 *	27 600 *	54.0
58.0	65.3	118.6	27 200 *	27 200 *	27 200 *	58.0
62.0	63.3	116.6	26 900 *	26 900 *	26 900 *	62.0
66.0	61.2	114.3	26 500 *	26 200 *	26 500 *	66.0
70.0	59.2	111.9	26 200 *	23 300 *	26 200 *	70.0
74.0	57.0	109.3	25 900 *	20 900 *	25 900 *	74.0
78.0	54.8	106.5	25 700 *	18 700 *	25 700 *	78.0
82.0	52.6	103.4	25 000 *	16 700 *	25 000 *	82.0
86.0	50.3	100.0	23 300 *	14 900 *	23 900 *	86.0
90.0	47.9	96.4	21 400 *	13 300 *	22 900 *	90.0
94.0	45.3	92.5	19 700 *	11 800 *	22 100 *	94.0
98.0	42.7	88.1	18 000 *	10 500 *	21 200 *	98.0
102.0	39.9	83.4	16 500 *	9 200 *	20 500 *	102.0
106.0	37.0	78.1	14 300 *	8 000 *	18 800 *	106.0
110.0	33.8	72.2	12 300 *	6 900 *	16 200 *	110.0
114.0	30.3	65.4	10 400 *	5 900 *	13 700 *	114.0
118.0	26.4	57.6	8 600 *	4 700 *	11 300 *	118.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

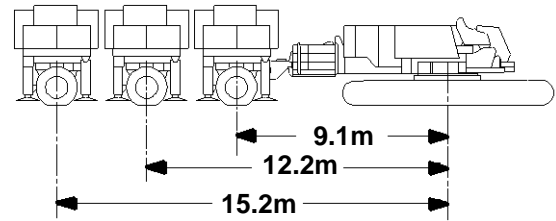

115.8m (380 Ft.) Boom
18.3m (60 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
25.9	80.8	135.5	30 600 *b
26.0	80.8	135.5	30 600 *b
28.0	79.9	135.1	30 300 *b
30.0	79.1	134.7	30 100 *b
32.0	78.2	134.3	29 800 *
34.0	77.3	133.8	29 600 *
36.0	76.4	133.3	29 400 *
38.0	75.6	132.7	29 100 *
40.0	74.7	132.2	28 900 *
42.0	73.8	131.5	28 700 *
44.0	72.9	130.9	28 500 *
46.0	72.0	130.2	28 300 *
50.0	70.2	128.7	27 900 *
54.0	68.3	127.1	27 500 *
58.0	66.5	125.4	27 100 *
62.0	64.6	123.4	26 800 *
66.0	62.7	121.3	26 500 *
70.0	60.7	119.1	26 100 *
74.0	58.7	116.6	25 900 *
78.0	56.7	114.0	25 600 *
82.0	54.6	111.1	25 400 *
86.0	52.4	108.0	24 900 *
90.0	50.2	104.6	23 900 *
94.0	47.9	101.0	23 000 *
98.0	45.5	97.1	22 100 *
102.0	43.0	92.8	20 900 *
106.0	40.4	88.1	18 500 *
110.0	37.6	82.9	15 800 *
114.0	34.6	77.2	13 400 *
118.0	31.4	70.7	11 100 *
122.0	27.8	63.3	8 900 *
126.0	23.7	54.6	6 800 *

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

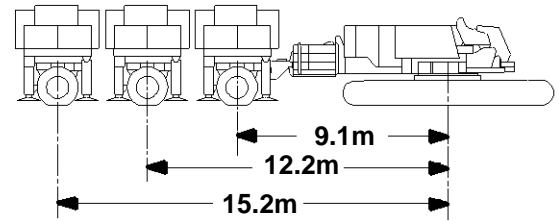

61.0m (200 Ft.) Boom

18.3m (60 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	79.9	79.9	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	21.3
22.0	79.4	79.7	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	22.0
24.0	77.9	79.1	26 400 *	26 400 *	26 400 *	26 400 *	26 400 *	26 400 *	24.0
26.0	76.4	78.5	25 200 *	25 200 *	25 200 *	25 200 *	25 200 *	25 200 *	26.0
28.0	74.9	77.8	24 100 *	24 100 *	24 100 *	24 100 *	24 100 *	24 100 *	28.0
30.0	73.3	77.1	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	30.0
32.0	71.8	76.3	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	32.0
34.0	70.2	75.4	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	34.0
36.0	68.6	74.5	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	36.0
38.0	67.0	73.5	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	38.0
40.0	65.4	72.4	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	40.0
42.0	63.7	71.3	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	42.0
44.0	62.0	70.1	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	44.0
46.0	60.3	68.8	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	46.0
50.0	56.7	65.9	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	50.0
54.0	53.0	62.6	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	54.0
58.0	49.0	58.8	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	58.0
62.0	44.7	54.4	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	62.0
66.0	40.0	49.3	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	66.0
70.0	34.7	43.1	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	70.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

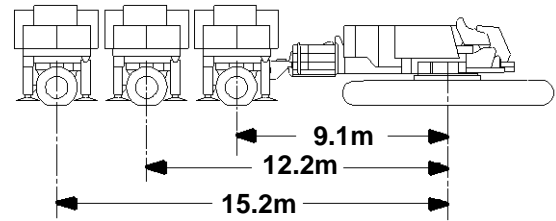

67.1m (220 Ft.) Boom

18.3m (60 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.7	86.1	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	21.3
22.0	80.2	86.0	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	22.0
24.0	78.8	85.5	27 200 *	27 200 *	27 200 *	27 200 *	27 200 *	27 200 *	24.0
26.0	77.4	84.9	26 000 *	26 000 *	26 000 *	26 000 *	26 000 *	26 000 *	26.0
28.0	76.0	84.3	24 900 *	24 900 *	24 900 *	24 900 *	24 900 *	24 900 *	28.0
30.0	74.6	83.6	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	30.0
32.0	73.2	82.8	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	32.0
34.0	71.7	82.1	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	34.0
36.0	70.3	81.2	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	36.0
38.0	68.8	80.3	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	38.0
40.0	67.3	79.3	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	40.0
42.0	65.8	78.3	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	42.0
44.0	64.2	77.2	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	44.0
46.0	62.7	76.0	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	46.0
50.0	59.5	73.4	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	50.0
54.0	56.2	70.5	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	54.0
58.0	52.7	67.1	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	58.0
62.0	49.0	63.4	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	62.0
66.0	45.0	59.1	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	66.0
70.0	40.8	54.1	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	70.0
74.0	36.0	48.3	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	74.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

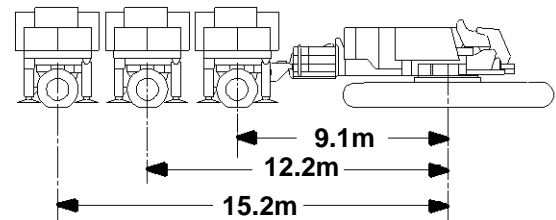

73.2m (240 Ft.) Boom

18.3m (60 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.3	92.0	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	22.9
24.0	79.6	91.7	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	24.0
26.0	78.3	91.2	26 700 *	26 700 *	26 700 *	26 700 *	26 700 *	26 700 *	26.0
28.0	77.0	90.6	25 600 *	25 600 *	25 600 *	25 600 *	25 600 *	25 600 *	28.0
30.0	75.7	90.0	24 600 *	24 600 *	24 600 *	24 600 *	24 600 *	24 600 *	30.0
32.0	74.3	89.3	23 700 *	23 700 *	23 700 *	23 700 *	23 700 *	23 700 *	32.0
34.0	73.0	88.6	22 800 *	22 800 *	22 800 *	22 800 *	22 800 *	22 800 *	34.0
36.0	71.7	87.8	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	36.0
38.0	70.3	87.0	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	38.0
40.0	68.9	86.1	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	40.0
42.0	67.5	85.1	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	42.0
44.0	66.1	84.1	19 400 *	19 400 *	19 400 *	19 400 *	19 400 *	19 400 *	44.0
46.0	64.7	83.0	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	46.0
50.0	61.8	80.7	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	50.0
54.0	58.8	78.0	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	54.0
58.0	55.7	75.0	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	58.0
62.0	52.4	71.7	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	62.0
66.0	49.0	68.0	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	66.0
70.0	45.3	63.7	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	70.0
74.0	41.4	58.9	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	74.0
78.0	37.1	53.3	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	78.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

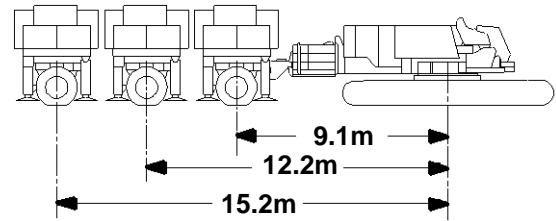

79.2m (260 Ft.) Boom
18.3m (60 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.9	98.3	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	22.9
24.0	80.2	98.0	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	24.0
26.0	79.0	97.5	27 500 *	27 500 *	27 500 *	27 500 *	27 500 *	27 500 *	26.0
28.0	77.8	97.0	26 400 *	26 400 *	26 400 *	26 400 *	26 400 *	26 400 *	28.0
30.0	76.6	96.4	25 400 *	25 400 *	25 400 *	25 400 *	25 400 *	25 400 *	30.0
32.0	75.4	95.8	24 500 *	24 500 *	24 500 *	24 500 *	24 500 *	24 500 *	32.0
34.0	74.1	95.1	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	34.0
36.0	72.9	94.3	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	36.0
38.0	71.6	93.6	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	38.0
40.0	70.3	92.7	21 400 *	21 400 *	21 400 *	21 400 *	21 400 *	21 400 *	40.0
42.0	69.1	91.8	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	42.0
44.0	67.8	90.9	20 100 *	20 100 *	20 100 *	20 100 *	20 100 *	20 100 *	44.0
46.0	66.4	89.9	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	46.0
50.0	63.8	87.7	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	50.0
54.0	61.0	85.3	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	54.0
58.0	58.2	82.6	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	58.0
62.0	55.3	79.6	16 000 *	16 000 *	16 000 *	16 000 *	16 000 *	16 000 *	62.0
66.0	52.2	76.3	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	66.0
70.0	49.0	72.6	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	70.0
74.0	45.6	68.4	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	74.0
78.0	41.9	63.7	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	78.0
82.0	38.0	58.2	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	82.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

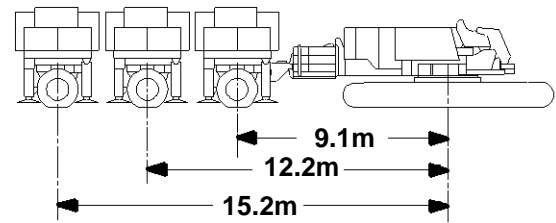

85.3m (280 Ft.) Boom

18.3m (60 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
24.4	80.8	104.1	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	29 300 *	24.4
26.0	79.8	103.7	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	29 100 *	26.0
28.0	78.7	103.2	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	28.0
30.0	77.5	102.7	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	30.0
32.0	76.4	102.1	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	32.0
34.0	75.2	101.4	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	34.0
36.0	74.1	100.7	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	36.0
38.0	72.9	100.0	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	38.0
40.0	71.7	99.2	27 000 *	27 000 *	27 000 *	27 000 *	27 000 *	27 000 *	40.0
42.0	70.5	98.4	26 300 *	26 300 *	26 300 *	26 300 *	26 300 *	26 300 *	42.0
44.0	69.3	97.5	25 500 *	25 500 *	25 500 *	25 500 *	25 500 *	25 500 *	44.0
46.0	68.1	96.6	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	46.0
50.0	65.6	94.6	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	50.0
54.0	63.1	92.4	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	54.0
58.0	60.5	89.9	21 500 *	21 500 *	21 500 *	21 500 *	21 500 *	21 500 *	58.0
62.0	57.8	87.2	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	62.0
66.0	55.0	84.1	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	66.0
70.0	52.1	80.8	18 200 *	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	70.0
74.0	49.1	77.1	16 100 *	18 400 *	18 400 *	18 400 *	18 400 *	18 400 *	74.0
78.0	45.9	72.9	14 300 *	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	78.0
82.0	42.5	68.3	12 600 *	17 300 *	16 000 *	17 300 *	17 300 *	17 300 *	82.0
86.0	38.9	63.0	11 100 *	16 800 *	14 300 *	16 800 *	16 800 *	16 800 *	86.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

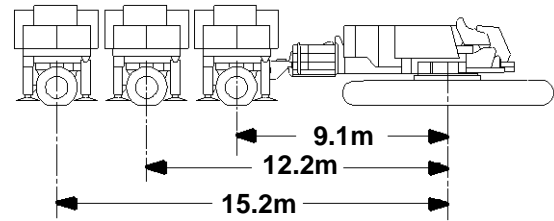

91.4m (300 Ft.) Boom

18.3m (60 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.5	110.0	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	25.9
26.0	80.4	110.0	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	29 000 *	26.0
28.0	79.3	109.5	28 800 *	28 800 *	28 800 *	28 800 *	28 800 *	28 800 *	28.0
30.0	78.3	109.0	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	30.0
32.0	77.2	108.4	28 300 *	28 300 *	28 300 *	28 300 *	28 300 *	28 300 *	32.0
34.0	76.1	107.8	28 100 *	28 100 *	28 100 *	28 100 *	28 100 *	28 100 *	34.0
36.0	75.0	107.2	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	36.0
38.0	73.9	106.5	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	38.0
40.0	72.8	105.8	27 500 *	27 500 *	27 500 *	27 500 *	27 500 *	27 500 *	40.0
42.0	71.7	105.0	27 000 *	27 000 *	27 000 *	27 000 *	27 000 *	27 000 *	42.0
44.0	70.5	104.2	26 300 *	26 300 *	26 300 *	26 300 *	26 300 *	26 300 *	44.0
46.0	69.4	103.3	25 600 *	25 600 *	25 600 *	25 600 *	25 600 *	25 600 *	46.0
50.0	67.1	101.4	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	50.0
54.0	64.7	99.4	23 300 *	23 300 *	23 300 *	23 300 *	23 300 *	23 300 *	54.0
58.0	62.3	97.1	22 200 *	22 200 *	22 200 *	22 200 *	22 200 *	22 200 *	58.0
62.0	59.8	94.6	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	62.0
66.0	57.3	91.8	20 200	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	66.0
70.0	54.7	88.7	17 900	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	70.0
74.0	51.9	85.4	15 800	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	74.0
78.0	49.1	81.7	14 000	18 400 *	17 600	18 400 *	18 400 *	18 400 *	78.0
82.0	46.1	77.6	12 300	17 900 *	15 700	17 900 *	17 900 *	17 900 *	82.0
86.0	42.9	73.0	10 800	17 300 *	14 000	17 300 *	17 200	17 300 *	86.0
90.0	39.5	67.9	9 400	16 900 *	12 500	16 900 *	15 600	16 900 *	90.0
94.0	35.8	62.0	8 200	15 000 *	11 100	16 500 *	14 000	16 500 *	94.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

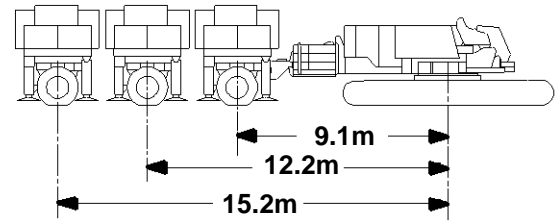

97.5m (320 Ft.) Boom

18.3m (60 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	81.0	116.2	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	25.9
26.0	80.9	116.2	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	28 900 *	26.0
28.0	79.9	115.7	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	28 700 *	28.0
30.0	78.9	115.3	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	28 500 *	30.0
32.0	77.9	114.7	28 300 *	28 300 *	28 300 *	28 300 *	28 300 *	28 300 *	32.0
34.0	76.8	114.2	28 100 *	28 100 *	28 100 *	28 100 *	28 100 *	28 100 *	34.0
36.0	75.8	113.6	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	27 900 *	36.0
38.0	74.8	112.9	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	38.0
40.0	73.7	112.2	27 500 *	27 500 *	27 500 *	27 500 *	27 500 *	27 500 *	40.0
42.0	72.7	111.5	27 400 *	27 400 *	27 400 *	27 400 *	27 400 *	27 400 *	42.0
44.0	71.6	110.7	26 900 *	26 900 *	26 900 *	26 900 *	26 900 *	26 900 *	44.0
46.0	70.5	109.9	26 300 *	26 300 *	26 300 *	26 300 *	26 300 *	26 300 *	46.0
50.0	68.4	108.2	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	50.0
54.0	66.2	106.2	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	54.0
58.0	63.9	104.1	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	58.0
62.0	61.6	101.8	21 400 *	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	62.0
66.0	59.3	99.2	18 800 *	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	66.0
70.0	56.9	96.4	16 400 *	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	70.0
74.0	54.4	93.3	14 400 *	19 700 *	18 100 *	19 700 *	19 700 *	19 700 *	74.0
78.0	51.8	90.0	12 500 *	19 000 *	16 100 *	19 000 *	19 000 *	19 000 *	78.0
82.0	49.1	86.3	10 900 *	18 400 *	14 200 *	18 400 *	17 700 *	18 400 *	82.0
86.0	46.3	82.2	9 300 *	17 900 *	12 600 *	17 900 *	15 800 *	17 900 *	86.0
90.0	43.3	77.7	7 900 *	16 100 *	11 000 *	17 400 *	14 100 *	17 400 *	90.0
94.0	40.1	72.7	6 700 *	13 800 *	9 600 *	17 000 *	12 600 *	17 000 *	94.0
98.0	36.7	67.0	5 200 *	11 600 *	8 300 *	16 600 *	11 100 *	16 600 *	98.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

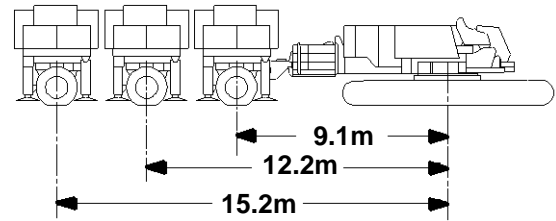

103.6m (340 Ft.) Boom
18.3m (60 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
27.4	80.7	122.1	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	27.4
28.0	80.4	122.0	28 600 *	28 600 *	28 600 *	28 600 *	28 600 *	28.0
30.0	79.5	121.5	28 400 *	28 400 *	28 400 *	28 400 *	28 400 *	30.0
32.0	78.5	121.0	28 200 *	28 200 *	28 200 *	28 200 *	28 200 *	32.0
34.0	77.5	120.5	28 000 *	28 000 *	28 000 *	28 000 *	28 000 *	34.0
36.0	76.5	119.9	27 800 *	27 800 *	27 800 *	27 800 *	27 800 *	36.0
38.0	75.6	119.3	27 700 *	27 700 *	27 700 *	27 700 *	27 700 *	38.0
40.0	74.6	118.7	27 500 *	27 500 *	27 500 *	27 500 *	27 500 *	40.0
42.0	73.6	118.0	27 300 *	27 300 *	27 300 *	27 300 *	27 300 *	42.0
44.0	72.6	117.3	27 200 *	27 200 *	27 200 *	27 200 *	27 200 *	44.0
46.0	71.6	116.5	27 000 *	27 000 *	27 000 *	27 000 *	27 000 *	46.0
50.0	69.5	114.8	25 700 *	25 700 *	25 700 *	25 700 *	25 700 *	50.0
54.0	67.5	113.0	24 600 *	24 600 *	24 600 *	24 600 *	24 600 *	54.0
58.0	65.4	111.0	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	58.0
62.0	63.2	108.8	22 600 *	22 600 *	22 600 *	22 600 *	22 600 *	62.0
66.0	61.0	106.5	21 800 *	21 800 *	21 800 *	21 800 *	21 800 *	66.0
70.0	58.8	103.9	21 000 *	20 100 *	21 000 *	21 000 *	21 000 *	70.0
74.0	56.5	101.0	20 300 *	17 800 *	20 300 *	20 300 *	20 300 *	74.0
78.0	54.1	97.9	19 600 *	15 800 *	19 600 *	19 400 *	19 600 *	78.0
82.0	51.6	94.6	19 000 *	13 900 *	19 000 *	17 300 *	19 000 *	82.0
86.0	49.1	90.9	18 300 *	12 300 *	18 400 *	15 500 *	18 400 *	86.0
90.0	46.4	86.8	16 500 *	10 700 *	17 900 *	13 800 *	17 900 *	90.0
94.0	43.6	82.4	14 100 *	9 300 *	17 500 *	12 300 *	17 500 *	94.0
98.0	40.6	77.5	12 000 *	8 100 *	17 000 *	10 900 *	17 000 *	98.0
102.0	37.4	72.0	9 900 *	6 800 *	16 400 *	9 600 *	16 700 *	102.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

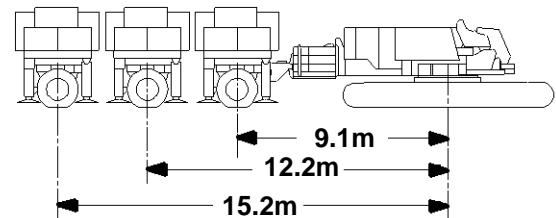

109.7m (360 Ft.) Boom
18.3m (60 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position	15.2m Position		Jib Oper. Rad. Meters
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
29.0	80.5	128.0	28 200 *	28 200 *	28 200 *	29.0
30.0	80.0	127.8	28 100 *	28 100 *	28 100 *	30.0
32.0	79.1	127.3	27 900 *	27 900 *	27 900 *	32.0
34.0	78.1	126.8	27 800 *	27 800 *	27 800 *	34.0
36.0	77.2	126.3	27 600 *	27 600 *	27 600 *	36.0
38.0	76.3	125.7	27 400 *	27 400 *	27 400 *	38.0
40.0	75.3	125.1	27 300 *	27 300 *	27 300 *	40.0
42.0	74.4	124.4	27 200 *	27 200 *	27 200 *	42.0
44.0	73.4	123.7	27 000 *	27 000 *	27 000 *	44.0
46.0	72.5	123.0	26 900 *	26 900 *	26 900 *	46.0
50.0	70.6	121.5	26 400 *	26 400 *	26 400 *	50.0
54.0	68.6	119.7	25 200 *	25 200 *	25 200 *	54.0
58.0	66.6	117.9	24 100 *	24 100 *	24 100 *	58.0
62.0	64.6	115.8	23 200 *	23 200 *	23 200 *	62.0
66.0	62.6	113.6	22 400 *	22 400 *	22 400 *	66.0
70.0	60.5	111.1	21 600 *	21 600 *	21 600 *	70.0
74.0	58.3	108.5	20 800 *	20 800 *	20 800 *	74.0
78.0	56.1	105.6	20 200 *	19 300 *	20 200 *	78.0
82.0	53.9	102.5	19 500 *	17 200 *	19 500 *	82.0
86.0	51.5	99.1	19 000 *	15 400 *	19 000 *	86.0
90.0	49.1	95.5	18 400 *	13 800 *	18 400 *	90.0
94.0	46.5	91.5	18 000 *	12 200 *	18 000 *	94.0
98.0	43.9	87.1	17 500 *	10 800 *	17 500 *	98.0
102.0	41.1	82.3	16 800 *	9 500 *	17 100 *	102.0
106.0	38.1	76.9	14 800 *	8 300 *	16 700 *	106.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

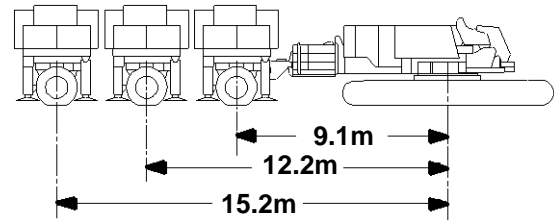

115.8m (380 Ft.) Boom
18.3m (60 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
29.0	80.9	134.2	27 900 *
30.0	80.4	134.0	27 800 *
32.0	79.6	133.6	27 700 *
34.0	78.7	133.1	27 500 *
36.0	77.8	132.6	27 400 *
38.0	76.9	132.0	27 200 *
40.0	76.0	131.4	27 100 *
42.0	75.1	130.8	27 000 *
44.0	74.2	130.2	26 900 *
46.0	73.3	129.5	26 700 *
50.0	71.5	128.0	26 500 *
54.0	69.7	126.4	25 800 *
58.0	67.8	124.6	24 800 *
62.0	65.9	122.7	23 800 *
66.0	63.9	120.6	22 900 *
70.0	62.0	118.3	22 100 *
74.0	60.0	115.8	21 400 *
78.0	57.9	113.1	20 700 *
82.0	55.8	110.2	20 100 *
86.0	53.6	107.1	19 500 *
90.0	51.4	103.7	18 900 *
94.0	49.1	100.1	18 400 *
98.0	46.7	96.1	18 000 *
102.0	44.1	91.8	17 600 *
106.0	41.5	87.0	17 200 *
110.0	38.7	81.8	16 700 *
114.0	35.6	76.0	14 000 *

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

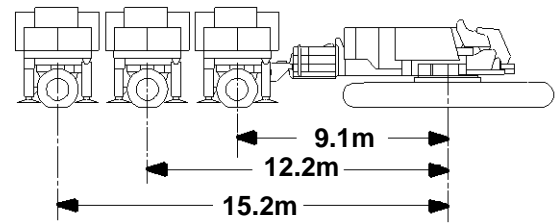

61.0m (200 Ft.) Boom

18.3m (60 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
24.4	80.3	77.6	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	24.4
26.0	79.0	77.1	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	26.0
28.0	77.5	76.4	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	28.0
30.0	75.9	75.6	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	30.0
32.0	74.3	74.8	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	32.0
34.0	72.7	73.9	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	34.0
36.0	71.1	73.0	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	36.0
38.0	69.4	72.0	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	38.0
40.0	67.7	70.9	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	40.0
42.0	66.0	69.7	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	42.0
44.0	64.3	68.5	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	44.0
46.0	62.5	67.1	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	46.0
50.0	58.9	64.1	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	50.0
54.0	55.0	60.7	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	54.0
58.0	50.9	56.8	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	58.0

67.1m (220 Ft.) Boom

18.3m (60 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
24.4	81.0	83.9	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	24.4
26.0	79.8	83.4	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	26.0
28.0	78.4	82.8	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	28.0
30.0	77.0	82.1	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	30.0
32.0	75.5	81.4	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	32.0
34.0	74.0	80.6	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	34.0
36.0	72.5	79.7	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	36.0
38.0	71.0	78.8	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	38.0
40.0	69.5	77.8	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	40.0
42.0	68.0	76.7	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	42.0
44.0	66.4	75.6	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	44.0
46.0	64.8	74.3	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	46.0
50.0	61.5	71.7	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	50.0
54.0	58.1	68.7	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	54.0
58.0	54.5	65.3	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	58.0
62.0	50.7	61.4	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	62.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

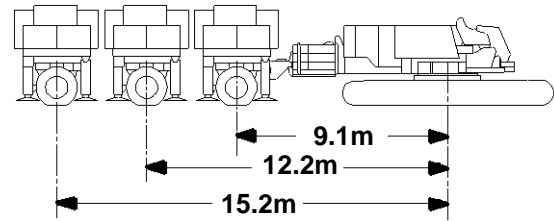

73.2m (240 Ft.) Boom

18.3m (60 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.6	89.8	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	25.9
26.0	80.6	89.7	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	26.0
28.0	79.2	89.2	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	28.0
30.0	77.9	88.5	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	30.0
32.0	76.5	87.8	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	32.0
34.0	75.2	87.1	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	34.0
36.0	73.8	86.3	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	36.0
38.0	72.4	85.4	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	38.0
40.0	71.0	84.5	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	40.0
42.0	69.6	83.5	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	42.0
44.0	68.2	82.5	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	44.0
46.0	66.7	81.4	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	46.0
50.0	63.8	79.0	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	50.0
54.0	60.7	76.3	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	54.0
58.0	57.5	73.2	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	58.0
62.0	54.1	69.8	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	62.0
66.0	50.6	66.0	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	66.0
70.0	46.8	61.6	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	70.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

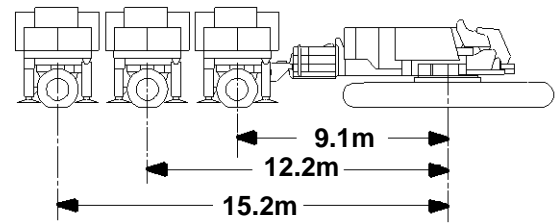

79.2m (260 Ft.) Boom

18.3m (60 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
27.4	80.3	95.6	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	27.4
28.0	79.9	95.5	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	28.0
30.0	78.7	94.9	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	30.0
32.0	77.4	94.2	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	32.0
34.0	76.2	93.5	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	34.0
36.0	74.9	92.8	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	36.0
38.0	73.6	92.0	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	38.0
40.0	72.3	91.2	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	40.0
42.0	71.0	90.3	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	42.0
44.0	69.7	89.3	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	44.0
46.0	68.4	88.3	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	46.0
50.0	65.6	86.1	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	50.0
54.0	62.8	83.6	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	54.0
58.0	59.9	80.9	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	58.0
62.0	56.9	77.8	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	62.0
66.0	53.8	74.4	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	66.0
70.0	50.5	70.6	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	70.0
74.0	47.0	66.2	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	74.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
 ANSI B30.5
 Requirements

MAX-ER 2000 On 2250

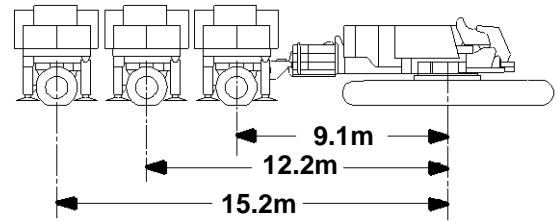

85.3m (280 Ft.) Boom

18.3m (60 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
27.4	80.8	102.0	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	27.4
28.0	80.5	101.9	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	28.0
30.0	79.3	101.3	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	30.0
32.0	78.1	100.7	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	32.0
34.0	77.0	100.1	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	34.0
36.0	75.8	99.4	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	36.0
38.0	74.6	98.6	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	38.0
40.0	73.4	97.8	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	40.0
42.0	72.2	97.0	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	42.0
44.0	70.9	96.1	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	44.0
46.0	69.7	95.2	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	46.0
50.0	67.2	93.1	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	50.0
54.0	64.6	90.9	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	54.0
58.0	61.9	88.3	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	58.0
62.0	59.2	85.6	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	62.0
66.0	56.4	82.5	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	66.0
70.0	53.4	79.1	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	70.0
74.0	50.3	75.2	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	74.0
78.0	47.1	71.0	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	78.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

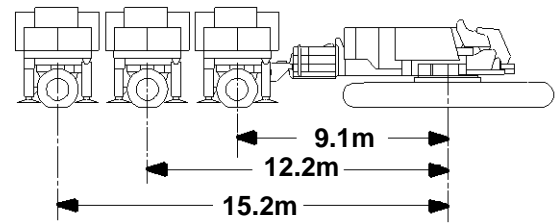

91.4m (300 Ft.) Boom

18.3m (60 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
29.0	80.5	107.9	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	29.0
30.0	79.9	107.6	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	30.0
32.0	78.8	107.0	18 400 *	18 400 *	18 400 *	18 400 *	18 400 *	18 400 *	32.0
34.0	77.7	106.4	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	34.0
36.0	76.6	105.8	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	36.0
38.0	75.5	105.1	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	38.0
40.0	74.4	104.4	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	40.0
42.0	73.2	103.6	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	42.0
44.0	72.1	102.7	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	44.0
46.0	70.9	101.9	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	46.0
50.0	68.6	100.0	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	50.0
54.0	66.2	97.9	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	54.0
58.0	63.7	95.5	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	58.0
62.0	61.2	93.0	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	62.0
66.0	58.6	90.2	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	66.0
70.0	56.0	87.0	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	70.0
74.0	53.2	83.6	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	74.0
78.0	50.3	79.8	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	78.0
82.0	47.2	75.6	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	82.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

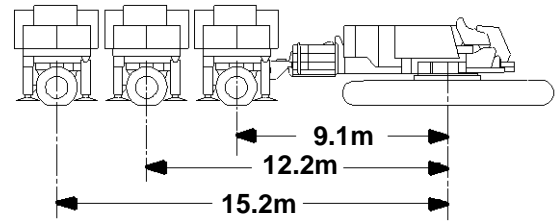

97.5m (320 Ft.) Boom

18.3m (60 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
29.0	81.0	114.1	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	29.0
30.0	80.5	113.9	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	30.0
32.0	79.4	113.4	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	32.0
34.0	78.4	112.8	18 200 *	18 200 *	18 200 *	18 200 *	18 200 *	18 200 *	34.0
36.0	77.4	112.2	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	36.0
38.0	76.3	111.5	17 500 *	17 500 *	17 500 *	17 500 *	17 500 *	17 500 *	38.0
40.0	75.2	110.8	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	40.0
42.0	74.2	110.1	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	42.0
44.0	73.1	109.3	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	44.0
46.0	72.0	108.5	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	46.0
50.0	69.8	106.7	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	50.0
54.0	67.6	104.8	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	54.0
58.0	65.3	102.6	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	58.0
62.0	63.0	100.2	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	62.0
66.0	60.6	97.6	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	66.0
70.0	58.1	94.7	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	70.0
74.0	55.6	91.6	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	74.0
78.0	52.9	88.2	12 800 *	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	78.0
82.0	50.2	84.4	11 200 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	82.0
86.0	47.3	80.3	9 700 *	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	86.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

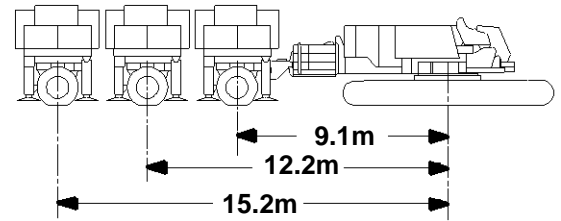

103.6m (340 Ft.) Boom
18.3m (60 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
30.5	80.7	120.0	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	30.5
32.0	80.0	119.6	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	32.0
34.0	79.0	119.1	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	34.0
36.0	78.0	118.5	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	36.0
38.0	77.0	117.9	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	38.0
40.0	76.0	117.3	17 400 *	17 400 *	17 400 *	17 400 *	17 400 *	40.0
42.0	75.0	116.6	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	42.0
44.0	74.0	115.8	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	44.0
46.0	73.0	115.1	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	46.0
50.0	70.9	113.4	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	50.0
54.0	68.8	111.5	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	54.0
58.0	66.7	109.5	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	58.0
62.0	64.5	107.3	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	62.0
66.0	62.3	104.9	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	66.0
70.0	60.0	102.2	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	70.0
74.0	57.7	99.3	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	74.0
78.0	55.2	96.2	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	78.0
82.0	52.7	92.8	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	82.0
86.0	50.1	89.0	12 600 *	12 500 *	12 600 *	12 600 *	12 600 *	86.0
90.0	47.4	84.9	12 400 *	11 100 *	12 400 *	12 400 *	12 400 *	90.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

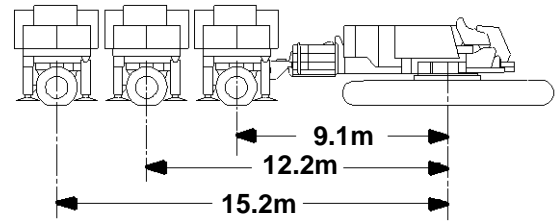

109.7m (360 Ft.) Boom
18.3m (60 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position	15.2m Position		Jib Oper. Rad. Meters
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
32.0	80.5	125.9	19 000 *	19 000 *	19 000 *	32.0
34.0	79.6	125.4	18 600 *	18 600 *	18 600 *	34.0
36.0	78.6	124.9	18 300 *	18 300 *	18 300 *	36.0
38.0	77.7	124.3	18 000 *	18 000 *	18 000 *	38.0
40.0	76.7	123.7	17 600 *	17 600 *	17 600 *	40.0
42.0	75.8	123.0	17 300 *	17 300 *	17 300 *	42.0
44.0	74.8	122.3	17 000 *	17 000 *	17 000 *	44.0
46.0	73.8	121.6	16 700 *	16 700 *	16 700 *	46.0
50.0	71.9	120.0	16 200 *	16 200 *	16 200 *	50.0
54.0	69.9	118.3	15 700 *	15 700 *	15 700 *	54.0
58.0	67.9	116.3	15 200 *	15 200 *	15 200 *	58.0
62.0	65.9	114.3	14 800 *	14 800 *	14 800 *	62.0
66.0	63.8	112.0	14 400 *	14 400 *	14 400 *	66.0
70.0	61.7	109.5	14 000 *	14 000 *	14 000 *	70.0
74.0	59.5	106.8	13 700 *	13 700 *	13 700 *	74.0
78.0	57.2	103.9	13 400 *	13 400 *	13 400 *	78.0
82.0	54.9	100.8	13 100 *	13 100 *	13 100 *	82.0
86.0	52.5	97.3	12 800 *	12 800 *	12 800 *	86.0
90.0	50.1	93.6	12 600 *	12 600 *	12 600 *	90.0
94.0	47.5	89.5	12 400 *	12 400 *	12 400 *	94.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

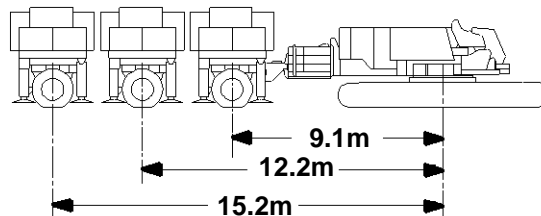

115.8m (380 Ft.) Boom
18.3m (60 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
32.0	80.9	132.2	19 200 *
34.0	80.0	131.7	18 900 *
36.0	79.2	131.2	18 500 *
38.0	78.3	130.6	18 200 *
40.0	77.4	130.0	17 900 *
42.0	76.4	129.4	17 600 *
44.0	75.5	128.7	17 300 *
46.0	74.6	128.0	17 000 *
50.0	72.8	126.5	16 400 *
54.0	70.9	124.9	15 900 *
58.0	69.0	123.1	15 500 *
62.0	67.1	121.1	15 000 *
66.0	65.1	119.0	14 600 *
70.0	63.1	116.7	14 300 *
74.0	61.1	114.2	13 900 *
78.0	59.0	111.5	13 600 *
82.0	56.9	108.5	13 300 *
86.0	54.7	105.4	13 100 *
90.0	52.4	101.9	12 800 *
94.0	50.0	98.2	12 600 *
98.0	47.5	94.1	12 400 *




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
 ANSI B30.5
 Requirements

MAX-ER 2000 On 2250

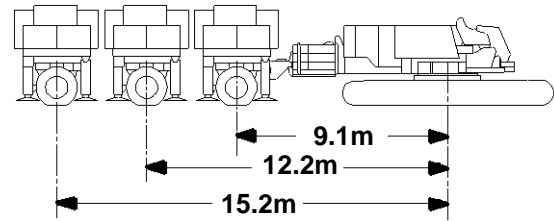

61.0m (200 Ft.) Boom

24.4m (80 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
18.3	80.8	87.4	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	18.3
20.0	79.6	87.0	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	20.0
22.0	78.3	86.6	24 900 *	24 900 *	24 900 *	24 900 *	24 900 *	24 900 *	22.0
24.0	76.9	86.1	24 400 *	24 400 *	24 400 *	24 400 *	24 400 *	24 400 *	24.0
26.0	75.5	85.5	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	26.0
28.0	74.1	84.9	23 400 *	23 400 *	23 400 *	23 400 *	23 400 *	23 400 *	28.0
30.0	72.7	84.2	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	30.0
32.0	71.3	83.5	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	32.0
34.0	69.9	82.7	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	34.0
36.0	68.4	81.8	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	36.0
38.0	66.9	80.9	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	38.0
40.0	65.5	80.0	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	40.0
42.0	64.0	78.9	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	42.0
44.0	62.4	77.8	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	44.0
46.0	60.9	76.7	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	46.0
50.0	57.7	74.1	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	50.0
54.0	54.4	71.2	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	54.0
58.0	51.0	67.9	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	58.0
62.0	47.3	64.2	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	62.0
66.0	43.5	60.0	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	66.0
70.0	39.3	55.1	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	70.0
74.0	34.6	49.4	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	74.0
78.0	29.2	42.4	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	78.0
82.0	22.7	33.4	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	82.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

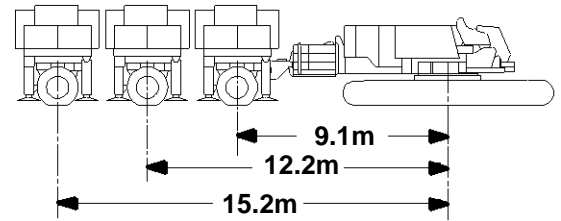

67.1m (220 Ft.) Boom
24.4m (80 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
19.8	80.5	93.3	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	19.8
20.0	80.3	93.3	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	20.0
22.0	79.1	92.8	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	22.0
24.0	77.8	92.4	24 600 *	24 600 *	24 600 *	24 600 *	24 600 *	24 600 *	24.0
26.0	76.5	91.8	24 200 *	24 200 *	24 200 *	24 200 *	24 200 *	24 200 *	26.0
28.0	75.2	91.3	23 700 *	23 700 *	23 700 *	23 700 *	23 700 *	23 700 *	28.0
30.0	73.9	90.6	23 300 *	23 300 *	23 300 *	23 300 *	23 300 *	23 300 *	30.0
32.0	72.6	90.0	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	32.0
34.0	71.3	89.2	22 400 *	22 400 *	22 400 *	22 400 *	22 400 *	22 400 *	34.0
36.0	69.9	88.5	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	36.0
38.0	68.6	87.6	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	38.0
40.0	67.2	86.7	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	40.0
42.0	65.8	85.8	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	42.0
44.0	64.4	84.8	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	44.0
46.0	63.0	83.7	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	46.0
50.0	60.1	81.4	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	50.0
54.0	57.2	78.7	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	54.0
58.0	54.1	75.8	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	58.0
62.0	50.8	72.5	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	62.0
66.0	47.5	68.8	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	66.0
70.0	43.9	64.6	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	70.0
74.0	40.0	59.9	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	74.0
78.0	35.7	54.4	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	78.0
82.0	31.0	47.8	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	82.0
86.0	25.3	39.7	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	86.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

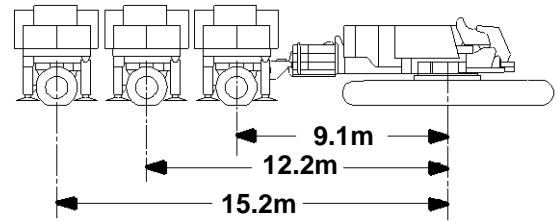

73.2m (240 Ft.) Boom

24.4m (80 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.2	99.2	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	21.3
22.0	79.8	99.1	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	22.0
24.0	78.6	98.6	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	24.0
26.0	77.4	98.1	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	26.0
28.0	76.1	97.6	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	28.0
30.0	74.9	97.0	23 500 *	23 500 *	23 500 *	23 500 *	23 500 *	23 500 *	30.0
32.0	73.7	96.4	23 100 *	23 100 *	23 100 *	23 100 *	23 100 *	23 100 *	32.0
34.0	72.5	95.7	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	34.0
36.0	71.2	95.0	22 300 *	22 300 *	22 300 *	22 300 *	22 300 *	22 300 *	36.0
38.0	70.0	94.2	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	38.0
40.0	68.7	93.4	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	40.0
42.0	67.4	92.5	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	42.0
44.0	66.2	91.6	20 900 *	20 900 *	20 900 *	20 900 *	20 900 *	20 900 *	44.0
46.0	64.9	90.6	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	46.0
50.0	62.2	88.4	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	50.0
54.0	59.5	86.0	19 500 *	19 500 *	19 500 *	19 500 *	19 500 *	19 500 *	54.0
58.0	56.7	83.4	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	58.0
62.0	53.8	80.4	18 400 *	18 400 *	18 400 *	18 400 *	18 400 *	18 400 *	62.0
66.0	50.7	77.1	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	66.0
70.0	47.6	73.4	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	70.0
74.0	44.2	69.3	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	74.0
78.0	40.6	64.6	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	78.0
82.0	36.7	59.3	13 300	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	82.0
86.0	32.4	53.1	11 800	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	86.0
90.0	27.5	45.6	10 400	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	90.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

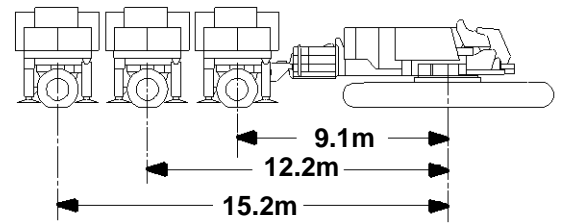

79.2m (260 Ft.) Boom
24.4m (80 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.7	105.4	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	25 100 *	21.3
22.0	80.4	105.3	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	25 000 *	22.0
24.0	79.2	104.9	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	24 800 *	24.0
26.0	78.1	104.4	24 400 *	24 400 *	24 400 *	24 400 *	24 400 *	24 400 *	26.0
28.0	77.0	103.9	24 000 *	24 000 *	24 000 *	24 000 *	24 000 *	24 000 *	28.0
30.0	75.8	103.4	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	30.0
32.0	74.7	102.8	23 200 *	23 200 *	23 200 *	23 200 *	23 200 *	23 200 *	32.0
34.0	73.5	102.1	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	34.0
36.0	72.4	101.5	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	22 500 *	36.0
38.0	71.2	100.7	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	38.0
40.0	70.0	100.0	21 800 *	21 800 *	21 800 *	21 800 *	21 800 *	21 800 *	40.0
42.0	68.8	99.2	21 500 *	21 500 *	21 500 *	21 500 *	21 500 *	21 500 *	42.0
44.0	67.6	98.3	21 200 *	21 200 *	21 200 *	21 200 *	21 200 *	21 200 *	44.0
46.0	66.4	97.4	20 900 *	20 900 *	20 900 *	20 900 *	20 900 *	20 900 *	46.0
50.0	64.0	95.4	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	50.0
54.0	61.5	93.2	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	54.0
58.0	58.9	90.7	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	58.0
62.0	56.2	88.0	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	62.0
66.0	53.5	85.0	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	66.0
70.0	50.6	81.7	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	70.0
74.0	47.6	78.0	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	74.0
78.0	44.5	74.0	14 600	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	78.0
82.0	41.2	69.4	12 900	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	82.0
86.0	37.6	64.2	11 500	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	86.0
90.0	33.6	58.3	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	90.0
94.0	29.2	51.2	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	94.0
98.0	24.0	42.6	4 000 *	4 000 *	4 000 *	4 000 *	4 000 *	4 000 *	98.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

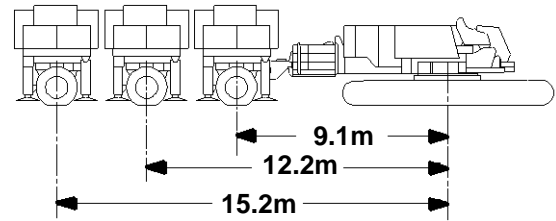

85.3m (280 Ft.) Boom
24.4m (80 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.9	111.3	24 500 *	24 500 *	24 500 *	24 500 *	24 500 *	24 500 *	22.9
24.0	80.3	111.0	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	24 300 *	24.0
26.0	79.2	110.6	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	26.0
28.0	78.1	110.1	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	28.0
30.0	77.1	109.6	23 200 *	23 200 *	23 200 *	23 200 *	23 200 *	23 200 *	30.0
32.0	76.0	109.1	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	32.0
34.0	74.9	108.5	22 600 *	22 600 *	22 600 *	22 600 *	22 600 *	22 600 *	34.0
36.0	73.8	107.8	22 200 *	22 200 *	22 200 *	22 200 *	22 200 *	22 200 *	36.0
38.0	72.7	107.1	21 900 *	21 900 *	21 900 *	21 900 *	21 900 *	21 900 *	38.0
40.0	71.6	106.4	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	40.0
42.0	70.5	105.7	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	42.0
44.0	69.4	104.8	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	44.0
46.0	68.2	104.0	20 800 *	20 800 *	20 800 *	20 800 *	20 800 *	20 800 *	46.0
50.0	65.9	102.1	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	50.0
54.0	63.6	100.1	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	54.0
58.0	61.2	97.8	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	58.0
62.0	58.8	95.3	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	62.0
66.0	56.2	92.5	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	66.0
70.0	53.6	89.5	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	70.0
74.0	50.9	86.2	16 400	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	74.0
78.0	48.1	82.5	14 600	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	78.0
82.0	45.1	78.5	12 900	16 400 *	16 300	16 400 *	16 400 *	16 400 *	82.0
86.0	42.0	74.0	11 500	15 700 *	14 700	15 700 *	15 700 *	15 700 *	86.0
90.0	38.7	68.9	10 200	15 000 *	13 200	15 000 *	15 000 *	15 000 *	90.0
94.0	35.0	63.2	8 900	14 400 *	11 900	14 400 *	14 400 *	14 400 *	94.0
98.0	31.0	56.5	7 800	13 500 *	10 600	13 900 *	13 400	13 900 *	98.0
102.0	26.3	48.6	6 700	11 400 *	9 400	13 300 *	12 100	13 300 *	102.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

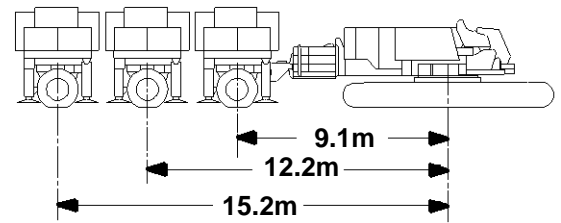

91.4m (300 Ft.) Boom
24.4m (80 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
24.4	80.6	117.2	24 100 *	24 100 *	24 100 *	24 100 *	24 100 *	24 100 *	24.4
26.0	79.8	116.8	23 800 *	23 800 *	23 800 *	23 800 *	23 800 *	23 800 *	26.0
28.0	78.8	116.4	23 500 *	23 500 *	23 500 *	23 500 *	23 500 *	23 500 *	28.0
30.0	77.7	115.9	23 200 *	23 200 *	23 200 *	23 200 *	23 200 *	23 200 *	30.0
32.0	76.7	115.4	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	22 900 *	32.0
34.0	75.7	114.8	22 600 *	22 600 *	22 600 *	22 600 *	22 600 *	22 600 *	34.0
36.0	74.7	114.2	22 300 *	22 300 *	22 300 *	22 300 *	22 300 *	22 300 *	36.0
38.0	73.6	113.6	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	22 000 *	38.0
40.0	72.6	112.9	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	40.0
42.0	71.6	112.2	21 500 *	21 500 *	21 500 *	21 500 *	21 500 *	21 500 *	42.0
44.0	70.5	111.4	21 200 *	21 200 *	21 200 *	21 200 *	21 200 *	21 200 *	44.0
46.0	69.4	110.6	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	46.0
50.0	67.3	108.9	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	50.0
54.0	65.1	106.9	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	54.0
58.0	62.9	104.8	19 500 *	19 500 *	19 500 *	19 500 *	19 500 *	19 500 *	58.0
62.0	60.6	102.5	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	62.0
66.0	58.3	100.0	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	66.0
70.0	55.9	97.2	18 000 *	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	70.0
74.0	53.4	94.1	16 000 *	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	74.0
78.0	50.8	90.8	14 200 *	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	78.0
82.0	48.2	87.1	12 600 *	17 300 *	16 000 *	17 300 *	17 300 *	17 300 *	82.0
86.0	45.4	83.1	11 100 *	16 500 *	14 300 *	16 500 *	16 500 *	16 500 *	86.0
90.0	42.4	78.7	9 800 *	15 800 *	12 900 *	15 800 *	15 800 *	15 800 *	90.0
94.0	39.3	73.7	8 600 *	15 100 *	11 500 *	15 100 *	14 500 *	15 100 *	94.0
98.0	35.9	68.2	7 400 *	13 800 *	10 200 *	14 500 *	13 100 *	14 500 *	98.0
102.0	32.2	61.8	6 400 *	11 900 *	9 100 *	14 000 *	11 800 *	14 000 *	102.0
106.0	28.0	54.4	5 400 *	10 000 *	8 000 *	13 500 *	10 600 *	13 500 *	106.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

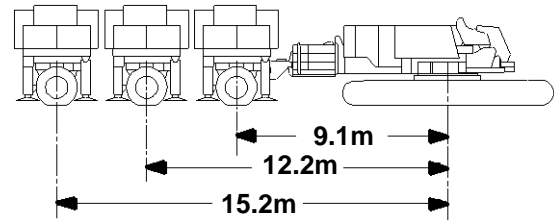

97.5m (320 Ft.) Boom

24.4m (80 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.3	123.1	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	25.9
26.0	80.3	123.1	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	23 900 *	26.0
28.0	79.3	122.6	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	23 600 *	28.0
30.0	78.4	122.2	23 300 *	23 300 *	23 300 *	23 300 *	23 300 *	23 300 *	30.0
32.0	77.4	121.7	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	23 000 *	32.0
34.0	76.4	121.1	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	22 700 *	34.0
36.0	75.5	120.6	22 400 *	22 400 *	22 400 *	22 400 *	22 400 *	22 400 *	36.0
38.0	74.5	120.0	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	22 100 *	38.0
40.0	73.5	119.3	21 900 *	21 900 *	21 900 *	21 900 *	21 900 *	21 900 *	40.0
42.0	72.5	118.7	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	42.0
44.0	71.5	117.9	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	44.0
46.0	70.5	117.2	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	46.0
50.0	68.5	115.5	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	20 600 *	50.0
54.0	66.4	113.7	20 200 *	20 200 *	20 200 *	20 200 *	20 200 *	20 200 *	54.0
58.0	64.3	111.7	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	58.0
62.0	62.2	109.6	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	62.0
66.0	60.0	107.2	18 800	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	66.0
70.0	57.8	104.6	16 600	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	70.0
74.0	55.5	101.8	14 500	18 200 *	18 100	18 200 *	18 200 *	18 200 *	74.0
78.0	53.2	98.7	12 800	17 900 *	16 300	17 900 *	17 900 *	17 900 *	78.0
82.0	50.7	95.4	11 100	17 600 *	14 500	17 600 *	17 600 *	17 600 *	82.0
86.0	48.2	91.7	9 600	17 300 *	12 800	17 300 *	16 100	17 300 *	86.0
90.0	45.6	87.8	8 300	16 500 *	11 400	16 500 *	14 500	16 500 *	90.0
94.0	42.8	83.4	7 100	14 700 *	10 000	15 900 *	13 000	15 900 *	94.0
98.0	39.8	78.5	5 800 *	12 600 *	8 700	15 300 *	11 600	15 300 *	98.0
102.0	36.7	73.1	4 500 *	10 600 *	7 600	14 700 *	10 300	14 700 *	102.0
106.0	33.3	67.0	3 300 *	8 800 *	6 500	14 100 *	9 100	14 100 *	106.0
110.0	29.5	59.9	2 200 *	7 000 *	5 400 *	12 800 *	8 000	13 700 *	110.0
114.0	25.1	51.5		5 400 *	4 300 *	10 800 *	7 000	13 200 *	114.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

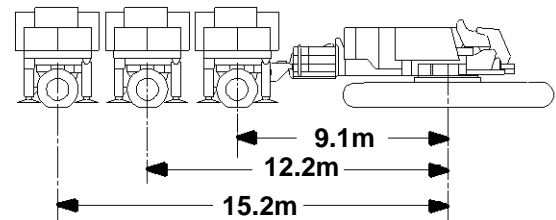

103.6m (340 Ft.) Boom
24.4m (80 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.8	129.3	23 800 *	23 800 *	23 800 *	23 800 *	25.9
26.0	80.8	129.3	23 700 *	23 700 *	23 700 *	23 700 *	26.0
28.0	79.8	128.9	23 500 *	23 500 *	23 500 *	23 500 *	28.0
30.0	78.9	128.4	23 200 *	23 200 *	23 200 *	23 200 *	30.0
32.0	78.0	128.0	22 900 *	22 900 *	22 900 *	22 900 *	32.0
34.0	77.1	127.5	22 600 *	22 600 *	22 600 *	22 600 *	34.0
36.0	76.2	126.9	22 400 *	22 400 *	22 400 *	22 400 *	36.0
38.0	75.2	126.3	22 100 *	22 100 *	22 100 *	22 100 *	38.0
40.0	74.3	125.7	21 900 *	21 900 *	21 900 *	21 900 *	40.0
42.0	73.4	125.1	21 600 *	21 600 *	21 600 *	21 600 *	42.0
44.0	72.4	124.4	21 400 *	21 400 *	21 400 *	21 400 *	44.0
46.0	71.5	123.7	21 100 *	21 100 *	21 100 *	21 100 *	46.0
50.0	69.6	122.1	20 700 *	20 700 *	20 700 *	20 700 *	50.0
54.0	67.6	120.4	20 300 *	20 300 *	20 300 *	20 300 *	54.0
58.0	65.7	118.6	19 900 *	19 900 *	19 900 *	19 900 *	58.0
62.0	63.7	116.5	19 400 *	19 400 *	19 400 *	19 400 *	62.0
66.0	61.6	114.3	19 100 *	19 100 *	19 100 *	19 100 *	66.0
70.0	59.5	111.9	18 700 *	18 700 *	18 700 *	18 700 *	70.0
74.0	57.4	109.3	18 000 *	18 400 *	18 400 *	18 400 *	74.0
78.0	55.2	106.4	15 900	18 000 *	18 000 *	18 000 *	78.0
82.0	53.0	103.3	14 100	17 700 *	17 500	17 700 *	82.0
86.0	50.6	100.0	12 500	17 500 *	15 800	17 500 *	86.0
90.0	48.2	96.4	11 000	17 200 *	14 100	17 200 *	90.0
94.0	45.7	92.4	9 700	16 600 *	12 600	16 600 *	94.0
98.0	43.1	88.1	8 400	15 900 *	11 200	15 900 *	98.0
102.0	40.3	83.3	7 300	15 300 *	10 000	15 300 *	102.0
106.0	37.4	78.0	6 100 *	14 800 *	8 800	14 800 *	106.0
110.0	34.2	72.1	4 900 *	13 200 *	7 700	14 300 *	110.0
114.0	30.7	65.4	3 800 *	11 300 *	6 700	13 800 *	114.0
118.0	26.8	57.5	2 700 *	9 500 *	5 700	13 300 *	118.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

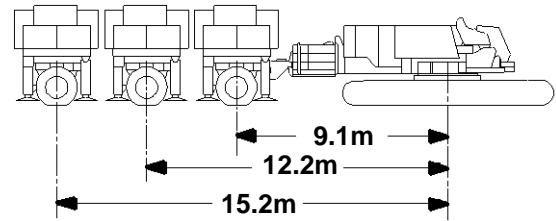

109.7m (360 Ft.) Boom 24.4m (80 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position	
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms
27.4	80.6	135.2	23 300 *	23 300 *
28.0	80.3	135.1	23 200 *	23 200 *
30.0	79.4	134.7	23 000 *	23 000 *
32.0	78.6	134.2	22 700 *	22 700 *
34.0	77.7	133.7	22 400 *	22 400 *
36.0	76.8	133.2	22 200 *	22 200 *
38.0	75.9	132.7	22 000 *	22 000 *
40.0	75.0	132.1	21 800 *	21 800 *
42.0	74.2	131.5	21 500 *	21 500 *
44.0	73.3	130.8	21 300 *	21 300 *
46.0	72.4	130.2	21 100 *	21 100 *
50.0	70.5	128.7	20 700 *	20 700 *
54.0	68.7	127.1	20 300 *	20 300 *
58.0	66.8	125.3	19 900 *	19 900 *
62.0	65.0	123.4	19 500 *	19 500 *
66.0	63.0	121.3	19 100 *	19 100 *
70.0	61.1	119.0	18 800 *	18 800 *
74.0	59.1	116.6	18 400 *	18 400 *
78.0	57.0	113.9	18 100 *	18 100 *
82.0	54.9	111.0	17 800 *	17 800 *
86.0	52.8	107.9	17 600 *	17 600 *
90.0	50.6	104.6	17 300 *	17 300 *
94.0	48.3	101.0	17 100 *	17 100 *
98.0	45.9	97.0	16 700 *	16 700 *
102.0	43.4	92.7	16 000 *	16 000 *
106.0	40.8	88.0	15 400 *	15 400 *
110.0	38.0	82.9	13 700 *	14 900 *
114.0	35.0	77.1	11 800 *	14 400 *
118.0	31.8	70.7	10 100 *	13 700 *
122.0	28.2	63.2	8 400 *	11 400 *
126.0	24.1	54.4	6 700 *	9 200 *

115.8m (380 Ft.) Boom 24.4m (80 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
27.4	81.0	141.4	23 000 *
28.0	80.7	141.3	22 900 *
30.0	79.9	140.9	22 700 *
32.0	79.1	140.5	22 500 *
34.0	78.2	140.0	22 300 *
36.0	77.4	139.5	22 000 *
38.0	76.6	139.0	21 800 *
40.0	75.7	138.5	21 600 *
42.0	74.9	137.9	21 400 *
44.0	74.0	137.3	21 200 *
46.0	73.2	136.6	21 000 *
50.0	71.4	135.2	20 600 *
54.0	69.7	133.7	20 200 *
58.0	67.9	132.0	19 900 *
62.0	66.1	130.2	19 500 *
66.0	64.3	128.2	19 100 *
70.0	62.5	126.0	18 800 *
74.0	60.6	123.7	18 500 *
78.0	58.7	121.2	18 200 *
82.0	56.7	118.5	17 900 *
86.0	54.7	115.7	17 600 *
90.0	52.6	112.5	17 400 *
94.0	50.5	109.2	17 100 *
98.0	48.3	105.6	16 900 *
102.0	46.0	101.6	16 700 *
106.0	43.6	97.4	16 100 *
110.0	41.2	92.8	15 500 *
114.0	38.5	87.7	15 000 *
118.0	35.7	82.1	13 200 *
122.0	32.7	75.9	11 000 *
126.0	29.4	68.8	9 000 *
130.0	25.7	60.6	6 900 *

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

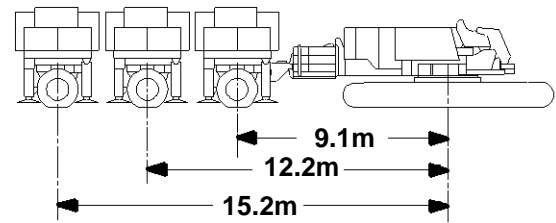

61.0m (200 Ft.) Boom

24.4m (80 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.9	85.6	21 900 *	21 900 *	21 900 *	21 900 *	21 900 *	21 900 *	22.9
24.0	80.1	85.3	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	21 700 *	24.0
26.0	78.7	84.7	21 400 *	21 400 *	21 400 *	21 400 *	21 400 *	21 400 *	26.0
28.0	77.3	84.1	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	28.0
30.0	75.9	83.4	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	30.0
32.0	74.4	82.7	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	32.0
34.0	73.0	81.9	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	34.0
36.0	71.5	81.0	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	36.0
38.0	70.1	80.1	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	38.0
40.0	68.6	79.1	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	40.0
42.0	67.0	78.1	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	42.0
44.0	65.5	77.0	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	44.0
46.0	63.9	75.8	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	46.0
50.0	60.7	73.2	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	50.0
54.0	57.4	70.3	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	54.0
58.0	53.9	66.9	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	58.0
62.0	50.2	63.2	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	62.0
66.0	46.2	58.8	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	66.0
70.0	41.9	53.9	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	70.0
74.0	37.1	48.0	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	74.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

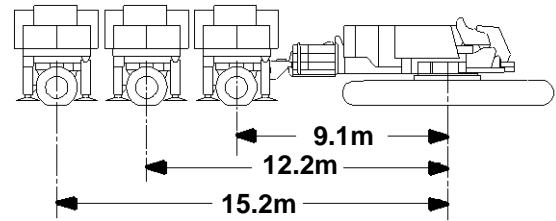

67.1m (220 Ft.) Boom

24.4m (80 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
24.4	80.5	91.5	21 800 *	21 800 *	21 800 *	21 800 *	21 800 *	21 800 *	24.4
26.0	79.5	91.0	21 500 *	21 500 *	21 500 *	21 500 *	21 500 *	21 500 *	26.0
28.0	78.2	90.5	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	28.0
30.0	76.9	89.8	20 200 *	20 200 *	20 200 *	20 200 *	20 200 *	20 200 *	30.0
32.0	75.5	89.1	19 400 *	19 400 *	19 400 *	19 400 *	19 400 *	19 400 *	32.0
34.0	74.2	88.4	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	34.0
36.0	72.9	87.6	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	36.0
38.0	71.5	86.8	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	38.0
40.0	70.1	85.9	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	40.0
42.0	68.7	84.9	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	42.0
44.0	67.3	83.9	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	44.0
46.0	65.9	82.8	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	46.0
50.0	63.0	80.5	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	50.0
54.0	60.0	77.8	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	54.0
58.0	56.8	74.8	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	58.0
62.0	53.6	71.5	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	62.0
66.0	50.1	67.7	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	66.0
70.0	46.4	63.5	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	70.0
74.0	42.5	58.6	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	74.0
78.0	38.1	53.0	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	78.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

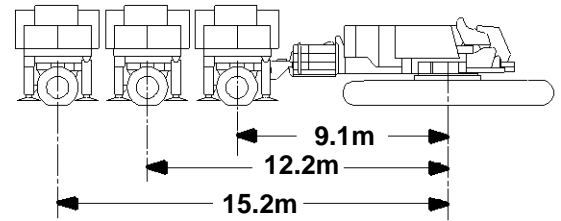

73.2m (240 Ft.) Boom

24.4m (80 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.2	97.4	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	25.9
26.0	80.2	97.3	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	26.0
28.0	78.9	96.8	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	28.0
30.0	77.7	96.2	20 800 *	20 800 *	20 800 *	20 800 *	20 800 *	20 800 *	30.0
32.0	76.5	95.6	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	32.0
34.0	75.2	94.9	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	34.0
36.0	74.0	94.2	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	36.0
38.0	72.7	93.4	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	38.0
40.0	71.4	92.5	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	40.0
42.0	70.2	91.6	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	42.0
44.0	68.9	90.7	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	44.0
46.0	67.5	89.7	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	46.0
50.0	64.9	87.5	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	50.0
54.0	62.1	85.1	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	54.0
58.0	59.3	82.4	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	58.0
62.0	56.3	79.4	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	62.0
66.0	53.3	76.1	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	66.0
70.0	50.0	72.3	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	70.0
74.0	46.6	68.1	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	74.0
78.0	43.0	63.4	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	78.0
82.0	39.0	57.9	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	82.0
86.0	34.5	51.5	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	86.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

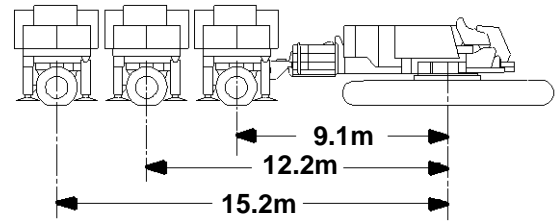

79.2m (260 Ft.) Boom

24.4m (80 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.8	103.6	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	25.9
26.0	80.8	103.6	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	21 600 *	26.0
28.0	79.6	103.1	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	28.0
30.0	78.5	102.5	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	30.0
32.0	77.3	101.9	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	32.0
34.0	76.2	101.3	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	34.0
36.0	75.0	100.6	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	36.0
38.0	73.8	99.9	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	38.0
40.0	72.6	99.1	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	40.0
42.0	71.4	98.3	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	42.0
44.0	70.2	97.4	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	44.0
46.0	69.0	96.5	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	46.0
50.0	66.5	94.5	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	50.0
54.0	64.0	92.2	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	54.0
58.0	61.4	89.8	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	58.0
62.0	58.7	87.0	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	62.0
66.0	55.9	84.0	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	66.0
70.0	53.0	80.6	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	70.0
74.0	50.0	76.9	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	74.0
78.0	46.8	72.8	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	78.0
82.0	43.4	68.1	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	82.0
86.0	39.7	62.8	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	86.0
90.0	35.7	56.7	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	90.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

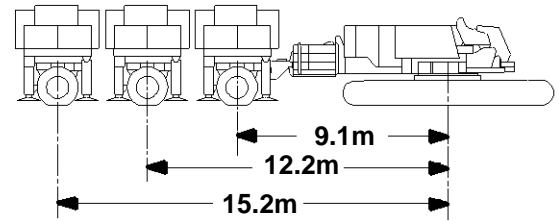

85.3m (280 Ft.) Boom

24.4m (80 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
27.4	80.7	109.4	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	21 300 *	27.4
28.0	80.4	109.3	21 200 *	21 200 *	21 200 *	21 200 *	21 200 *	21 200 *	28.0
30.0	79.3	108.8	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	30.0
32.0	78.2	108.2	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	32.0
34.0	77.1	107.6	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	34.0
36.0	76.0	107.0	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	36.0
38.0	74.9	106.3	20 100 *	20 100 *	20 100 *	20 100 *	20 100 *	20 100 *	38.0
40.0	73.8	105.5	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	40.0
42.0	72.7	104.8	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	42.0
44.0	71.5	104.0	19 400 *	19 400 *	19 400 *	19 400 *	19 400 *	19 400 *	44.0
46.0	70.4	103.1	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	46.0
50.0	68.1	101.2	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	50.0
54.0	65.7	99.1	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	54.0
58.0	63.3	96.8	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	58.0
62.0	60.8	94.3	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	62.0
66.0	58.3	91.5	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	66.0
70.0	55.6	88.5	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	70.0
74.0	52.9	85.1	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	74.0
78.0	50.0	81.4	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	78.0
82.0	47.0	77.3	13 400 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	82.0
86.0	43.8	72.7	11 900 *	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	86.0
90.0	40.4	67.5	10 500 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	90.0
94.0	36.7	61.6	9 300 *	12 200 *	12 100 *	12 200 *	12 200 *	12 200 *	94.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

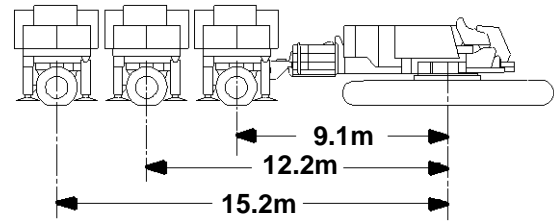

91.4m (300 Ft.) Boom

24.4m (80 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
29.0	80.4	115.3	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	21 100 *	29.0
30.0	79.9	115.0	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	30.0
32.0	78.8	114.5	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	32.0
34.0	77.8	113.9	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	34.0
36.0	76.8	113.3	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	36.0
38.0	75.7	112.7	20 100 *	20 100 *	20 100 *	20 100 *	20 100 *	20 100 *	38.0
40.0	74.7	112.0	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	40.0
42.0	73.6	111.3	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	42.0
44.0	72.6	110.5	19 500 *	19 500 *	19 500 *	19 500 *	19 500 *	19 500 *	44.0
46.0	71.5	109.7	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	46.0
50.0	69.3	107.9	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	50.0
54.0	67.1	106.0	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	54.0
58.0	64.9	103.9	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	58.0
62.0	62.6	101.5	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	62.0
66.0	60.2	99.0	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	66.0
70.0	57.8	96.1	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	70.0
74.0	55.3	93.1	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	74.0
78.0	52.7	89.7	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	78.0
82.0	50.0	86.0	13 200	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	82.0
86.0	47.1	81.9	11 600	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	86.0
90.0	44.2	77.4	10 300	13 100 *	13 000	13 100 *	13 100 *	13 100 *	90.0
94.0	41.0	72.3	9 000	12 600 *	11 900	12 600 *	12 600 *	12 600 *	94.0
98.0	37.5	66.7	7 800	12 300 *	10 600	12 300 *	12 300 *	12 300 *	98.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

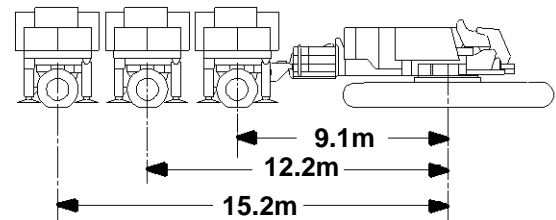

97.5m (320 Ft.) Boom

24.4m (80 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
29.0	80.9	121.6	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	21 000 *	29.0
30.0	80.4	121.3	20 900 *	20 900 *	20 900 *	20 900 *	20 900 *	20 900 *	30.0
32.0	79.4	120.8	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	32.0
34.0	78.4	120.3	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	34.0
36.0	77.5	119.7	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	36.0
38.0	76.5	119.1	20 100 *	20 100 *	20 100 *	20 100 *	20 100 *	20 100 *	38.0
40.0	75.5	118.4	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	40.0
42.0	74.5	117.8	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	19 800 *	42.0
44.0	73.5	117.0	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	44.0
46.0	72.5	116.3	19 400 *	19 400 *	19 400 *	19 400 *	19 400 *	19 400 *	46.0
50.0	70.4	114.6	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	50.0
54.0	68.4	112.8	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	18 800 *	54.0
58.0	66.3	110.8	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	58.0
62.0	64.1	108.6	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	62.0
66.0	61.9	106.2	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	66.0
70.0	59.7	103.6	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	70.0
74.0	57.3	100.7	15 300 *	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	74.0
78.0	55.0	97.6	13 400 *	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	78.0
82.0	52.5	94.3	11 800 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	82.0
86.0	49.9	90.6	10 200 *	13 900 *	13 500 *	13 900 *	13 900 *	13 900 *	86.0
90.0	47.2	86.5	8 900 *	13 500 *	11 900 *	13 500 *	13 500 *	13 500 *	90.0
94.0	44.4	82.1	7 600 *	13 100 *	10 500 *	13 100 *	13 100 *	13 100 *	94.0
98.0	41.4	77.1	6 300 *	12 700 *	9 200 *	12 700 *	12 000 *	12 700 *	98.0
102.0	38.2	71.6	5 000 *	11 300 *	8 000 *	12 300 *	10 700 *	12 300 *	102.0
106.0	34.7	65.3	3 700 *	9 300 *	6 800 *	12 100 *	9 500 *	12 100 *	106.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

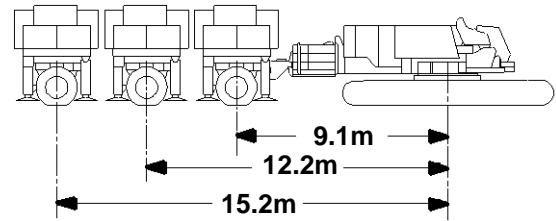

103.6m (340 Ft.) Boom
24.4m (80 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
30.5	80.6	127.4	20 900 *	20 900 *	20 900 *	20 900 *	30.5
32.0	79.9	127.1	20 700 *	20 700 *	20 700 *	20 700 *	32.0
34.0	79.0	126.6	20 500 *	20 500 *	20 500 *	20 500 *	34.0
36.0	78.1	126.0	20 300 *	20 300 *	20 300 *	20 300 *	36.0
38.0	77.1	125.4	20 100 *	20 100 *	20 100 *	20 100 *	38.0
40.0	76.2	124.8	20 000 *	20 000 *	20 000 *	20 000 *	40.0
42.0	75.3	124.2	19 800 *	19 800 *	19 800 *	19 800 *	42.0
44.0	74.3	123.5	19 600 *	19 600 *	19 600 *	19 600 *	44.0
46.0	73.4	122.8	19 500 *	19 500 *	19 500 *	19 500 *	46.0
50.0	71.4	121.2	19 200 *	19 200 *	19 200 *	19 200 *	50.0
54.0	69.5	119.5	18 900 *	18 900 *	18 900 *	18 900 *	54.0
58.0	67.5	117.6	18 500 *	18 500 *	18 500 *	18 500 *	58.0
62.0	65.5	115.5	18 200 *	18 200 *	18 200 *	18 200 *	62.0
66.0	63.4	113.3	17 400 *	17 400 *	17 400 *	17 400 *	66.0
70.0	61.3	110.9	16 700 *	16 700 *	16 700 *	16 700 *	70.0
74.0	59.2	108.2	16 000 *	16 000 *	16 000 *	16 000 *	74.0
78.0	57.0	105.3	15 400 *	15 400 *	15 400 *	15 400 *	78.0
82.0	54.7	102.2	14 800 *	14 900 *	14 900 *	14 900 *	82.0
86.0	52.3	98.8	13 100 *	14 400 *	14 400 *	14 400 *	86.0
90.0	49.9	95.2	11 600 *	13 900 *	13 900 *	13 900 *	90.0
94.0	47.3	91.2	10 200 *	13 500 *	13 200 *	13 500 *	94.0
98.0	44.7	86.8	8 900 *	13 100 *	11 700 *	13 100 *	98.0
102.0	41.8	81.9	7 600 *	12 800 *	10 400 *	12 800 *	102.0
106.0	38.8	76.5	6 500 *	12 400 *	9 100 *	12 400 *	106.0
110.0	35.6	70.5	5 300 *	12 100 *	8 000 *	12 100 *	110.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

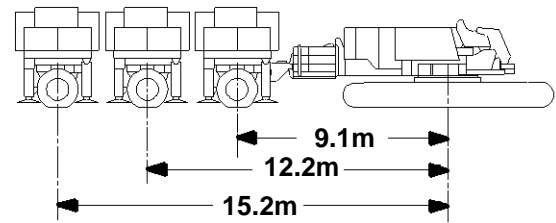

109.7m (360 Ft.) Boom 24.4m (80 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position	
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms
32.0	80.4	133.3	20 500 *	20 500 *
34.0	79.5	132.8	20 400 *	20 400 *
36.0	78.6	132.3	20 200 *	20 200 *
38.0	77.8	131.8	20 100 *	20 100 *
40.0	76.9	131.2	19 900 *	19 900 *
42.0	76.0	130.6	19 700 *	19 700 *
44.0	75.1	129.9	19 600 *	19 600 *
46.0	74.2	129.2	19 400 *	19 400 *
50.0	72.3	127.8	19 200 *	19 200 *
54.0	70.5	126.1	18 900 *	18 900 *
58.0	68.6	124.4	18 600 *	18 600 *
62.0	66.7	122.4	18 300 *	18 300 *
66.0	64.8	120.3	17 900 *	17 900 *
70.0	62.8	118.0	17 200 *	17 200 *
74.0	60.8	115.5	16 500 *	16 500 *
78.0	58.7	112.8	15 900 *	15 900 *
82.0	56.6	110.0	15 300 *	15 300 *
86.0	54.4	106.8	14 800 *	14 800 *
90.0	52.2	103.4	14 400 *	14 400 *
94.0	49.8	99.8	13 900 *	13 900 *
98.0	47.4	95.8	13 500 *	13 500 *
102.0	44.9	91.4	13 100 *	13 100 *
106.0	42.2	86.7	12 800 *	12 800 *
110.0	39.4	81.4	12 500 *	12 500 *
114.0	36.3	75.5	12 200 *	12 200 *

115.8m (380 Ft.) Boom 24.4m (80 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
32.0	80.8	139.6	20 400 *
34.0	80.0	139.1	20 200 *
36.0	79.1	138.6	20 100 *
38.0	78.3	138.1	19 900 *
40.0	77.5	137.5	19 800 *
42.0	76.6	137.0	19 700 *
44.0	75.7	136.3	19 500 *
46.0	74.9	135.7	19 300 *
50.0	73.1	134.3	19 100 *
54.0	71.4	132.7	18 800 *
58.0	69.6	131.0	18 600 *
62.0	67.8	129.2	18 300 *
66.0	66.0	127.2	18 100 *
70.0	64.1	125.0	17 700 *
74.0	62.2	122.7	17 000 *
78.0	60.3	120.2	16 400 *
82.0	58.3	117.5	15 800 *
86.0	56.3	114.6	15 200 *
90.0	54.2	111.4	14 800 *
94.0	52.0	108.0	14 300 *
98.0	49.8	104.4	13 900 *
102.0	47.5	100.4	13 500 *
106.0	45.1	96.1	13 200 *
110.0	42.6	91.4	12 800 *
114.0	39.9	86.2	12 500 *
118.0	37.0	80.5	12 200 *




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

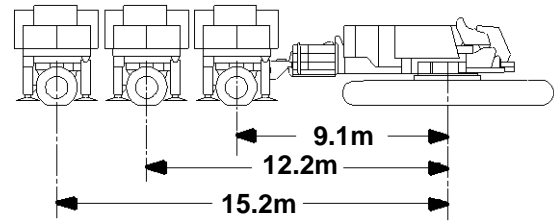

61.0m (200 Ft.) Boom
24.4m (80 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
29.0	80.1	82.1	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	29.0
30.0	79.4	81.7	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	30.0
32.0	77.9	81.0	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	32.0
34.0	76.4	80.2	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	34.0
36.0	74.9	79.3	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	36.0
38.0	73.4	78.4	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	38.0
40.0	71.9	77.4	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	40.0
42.0	70.3	76.3	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	42.0
44.0	68.8	75.2	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	44.0
46.0	67.2	74.0	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	46.0
50.0	63.9	71.4	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	50.0
54.0	60.4	68.4	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	54.0
58.0	56.8	65.0	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	58.0
62.0	53.0	61.1	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	62.0
66.0	48.9	56.6	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	66.0

67.1m (220 Ft.) Boom
24.4m (80 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
29.0	80.8	88.4	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	29.0
30.0	80.1	88.1	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	30.0
32.0	78.8	87.4	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	32.0
34.0	77.4	86.7	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	34.0
36.0	76.0	85.9	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	36.0
38.0	74.7	85.0	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	38.0
40.0	73.2	84.1	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	40.0
42.0	71.8	83.1	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	42.0
44.0	70.4	82.1	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	44.0
46.0	68.9	81.0	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	46.0
50.0	65.9	78.6	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	50.0
54.0	62.8	75.9	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	54.0
58.0	59.6	72.9	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	58.0
62.0	56.3	69.5	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	62.0
66.0	52.7	65.6	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	66.0
70.0	48.9	61.2	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	70.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
Boom No. 79-44 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
108 860 kg and 209 560 kg Wheeled Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

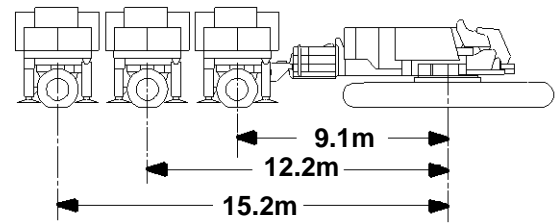

73.2m (240 Ft.) Boom

24.4m (80 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
30.5	80.5	94.3	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	30.5
32.0	79.5	93.8	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	32.0
34.0	78.3	93.1	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	34.0
36.0	77.0	92.4	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	36.0
38.0	75.7	91.6	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	38.0
40.0	74.4	90.7	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	40.0
42.0	73.1	89.8	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	42.0
44.0	71.8	88.9	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	44.0
46.0	70.4	87.9	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	46.0
50.0	67.7	85.7	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	50.0
54.0	64.9	83.2	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	54.0
58.0	62.0	80.5	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	58.0
62.0	58.9	77.4	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	62.0
66.0	55.8	74.0	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	66.0
70.0	52.5	70.2	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	70.0
74.0	48.9	65.8	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	74.0

79.2m (260 Ft.) Boom

24.4m (80 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
32.0	80.2	100.1	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	32.0
34.0	79.0	99.5	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	34.0
36.0	77.8	98.8	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	36.0
38.0	76.6	98.1	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	38.0
40.0	75.4	97.3	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	40.0
42.0	74.2	96.5	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	42.0
44.0	72.9	95.6	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	44.0
46.0	71.7	94.6	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	46.0
50.0	69.2	92.6	9 200 *	9 200 *	9 200 *	9 200 *	9 200 *	9 200 *	50.0
54.0	66.6	90.3	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	54.0
58.0	63.9	87.8	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	58.0
62.0	61.2	85.0	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	62.0
66.0	58.3	81.9	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	66.0
70.0	55.3	78.5	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	70.0
74.0	52.2	74.7	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	74.0
78.0	48.9	70.4	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	78.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

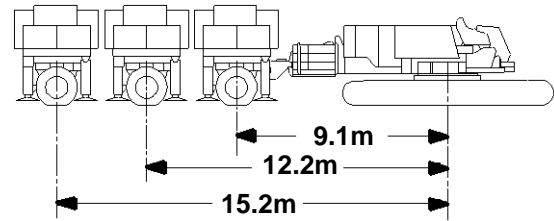

85.3m (280 Ft.) Boom

24.4m (80 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
32.0	80.6	106.6	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	32.0
34.0	79.5	106.0	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	34.0
36.0	78.4	105.3	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	36.0
38.0	77.3	104.6	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	38.0
40.0	76.2	103.9	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	40.0
42.0	75.0	103.1	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	42.0
44.0	73.9	102.3	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	44.0
46.0	72.7	101.4	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	46.0
50.0	70.4	99.5	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	50.0
54.0	68.0	97.4	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	54.0
58.0	65.5	95.1	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	58.0
62.0	63.0	92.6	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	62.0
66.0	60.4	89.7	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	66.0
70.0	57.7	86.6	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	70.0
74.0	54.9	83.2	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	74.0
78.0	51.9	79.4	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	78.0
82.0	48.9	75.2	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	82.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

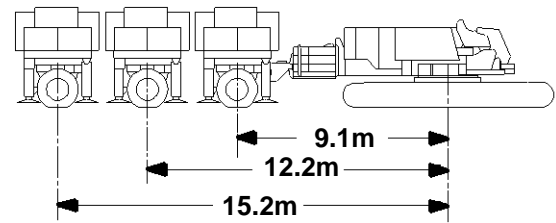

91.4m (300 Ft.) Boom

24.4m (80 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
33.5	80.4	112.4	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	33.5
34.0	80.1	112.3	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	34.0
36.0	79.1	111.7	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	36.0
38.0	78.0	111.1	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	38.0
40.0	76.9	110.4	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	40.0
42.0	75.9	109.6	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	42.0
44.0	74.8	108.9	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	44.0
46.0	73.7	108.0	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	46.0
50.0	71.5	106.3	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	50.0
54.0	69.3	104.3	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	54.0
58.0	67.0	102.1	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	58.0
62.0	64.6	99.8	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	62.0
66.0	62.2	97.2	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	66.0
70.0	59.8	94.3	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	70.0
74.0	57.2	91.2	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	74.0
78.0	54.5	87.8	9 700 *	9 700 *	9 700 *	9 700 *	9 700 *	9 700 *	78.0
82.0	51.8	84.0	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	82.0
86.0	48.9	79.8	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	86.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

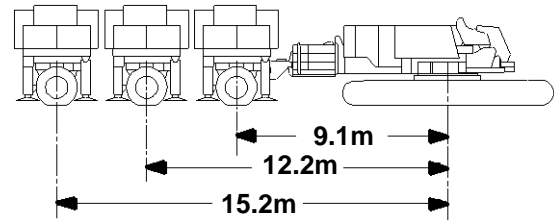

97.5m (320 Ft.) Boom
24.4m (80 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
33.5	80.9	118.7	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	33.5
34.0	80.6	118.6	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	34.0
36.0	79.6	118.0	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	36.0
38.0	78.6	117.4	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	38.0
40.0	77.6	116.8	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	40.0
42.0	76.6	116.1	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	42.0
44.0	75.6	115.4	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	44.0
46.0	74.6	114.6	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	46.0
50.0	72.5	112.9	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	50.0
54.0	70.4	111.1	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	54.0
58.0	68.3	109.1	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	58.0
62.0	66.1	106.8	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	62.0
66.0	63.8	104.4	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	66.0
70.0	61.6	101.8	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	70.0
74.0	59.2	98.9	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	74.0
78.0	56.8	95.7	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	78.0
82.0	54.2	92.3	9 700 *	9 700 *	9 700 *	9 700 *	9 700 *	9 700 *	82.0
86.0	51.6	88.6	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	86.0
90.0	48.9	84.4	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	90.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

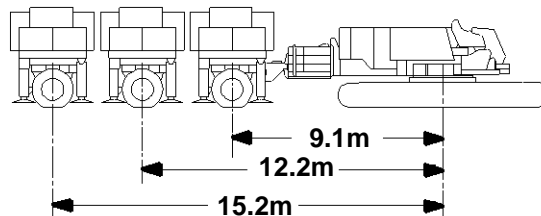

103.6m (340 Ft.) Boom
24.4m (80 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
35.1	80.6	124.6	12 500 *	12 500 *	12 500 *	12 500 *	35.1
36.0	80.2	124.3	12 500 *	12 500 *	12 500 *	12 500 *	36.0
38.0	79.2	123.8	12 500 *	12 500 *	12 500 *	12 500 *	38.0
40.0	78.3	123.1	12 500 *	12 500 *	12 500 *	12 500 *	40.0
42.0	77.3	122.5	12 500 *	12 500 *	12 500 *	12 500 *	42.0
44.0	76.3	121.8	12 500 *	12 500 *	12 500 *	12 500 *	44.0
46.0	75.4	121.1	12 500 *	12 500 *	12 500 *	12 500 *	46.0
50.0	73.4	119.5	12 400 *	12 400 *	12 400 *	12 400 *	50.0
54.0	71.4	117.8	12 000 *	12 000 *	12 000 *	12 000 *	54.0
58.0	69.4	115.9	11 600 *	11 600 *	11 600 *	11 600 *	58.0
62.0	67.4	113.8	11 300 *	11 300 *	11 300 *	11 300 *	62.0
66.0	65.3	111.5	11 000 *	11 000 *	11 000 *	11 000 *	66.0
70.0	63.1	109.1	10 700 *	10 700 *	10 700 *	10 700 *	70.0
74.0	60.9	106.4	10 400 *	10 400 *	10 400 *	10 400 *	74.0
78.0	58.7	103.5	10 100 *	10 100 *	10 100 *	10 100 *	78.0
82.0	56.4	100.3	9 900 *	9 900 *	9 900 *	9 900 *	82.0
86.0	54.0	96.9	9 700 *	9 700 *	9 700 *	9 700 *	86.0
90.0	51.5	93.1	9 500 *	9 500 *	9 500 *	9 500 *	90.0
94.0	48.9	89.0	9 300 *	9 300 *	9 300 *	9 300 *	94.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

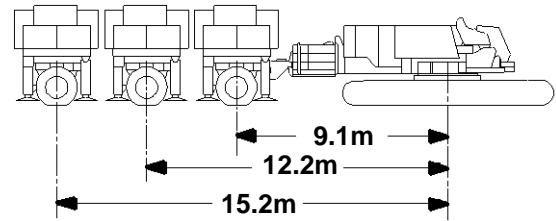

109.7m (360 Ft.) Boom 24.4m (80 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position	
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms
36.6	80.4	130.5	12 500 *	12 500 *
38.0	79.7	130.1	12 500 *	12 500 *
40.0	78.8	129.5	12 500 *	12 500 *
42.0	77.9	128.9	12 500 *	12 500 *
44.0	77.0	128.2	12 500 *	12 500 *
46.0	76.1	127.5	12 500 *	12 500 *
50.0	74.2	126.0	12 500 *	12 500 *
54.0	72.4	124.4	12 200 *	12 200 *
58.0	70.5	122.6	11 800 *	11 800 *
62.0	68.5	120.6	11 500 *	11 500 *
66.0	66.6	118.5	11 200 *	11 200 *
70.0	64.5	116.2	10 900 *	10 900 *
74.0	62.5	113.7	10 600 *	10 600 *
78.0	60.4	111.0	10 300 *	10 300 *
82.0	58.2	108.0	10 100 *	10 100 *
86.0	56.0	104.9	9 900 *	9 900 *
90.0	53.7	101.4	9 700 *	9 700 *
94.0	51.4	97.7	9 500 *	9 500 *
98.0	48.9	93.6	9 300 *	9 300 *
102.0	46.3	89.2	9 200 *	9 200 *

115.8m (380 Ft.) Boom 24.4m (80 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
36.6	80.8	136.8	12 500 *
38.0	80.2	136.4	12 500 *
40.0	79.3	135.8	12 500 *
42.0	78.5	135.2	12 500 *
44.0	77.6	134.6	12 500 *
46.0	76.7	134.0	12 500 *
50.0	75.0	132.5	12 500 *
54.0	73.2	131.0	12 400 *
58.0	71.4	129.3	12 000 *
62.0	69.6	127.4	11 700 *
66.0	67.7	125.4	11 300 *
70.0	65.8	123.2	11 100 *
74.0	63.9	120.9	10 800 *
78.0	61.9	118.3	10 500 *
82.0	59.9	115.6	10 300 *
86.0	57.8	112.6	10 100 *
90.0	55.7	109.4	9 900 *
94.0	53.5	106.0	9 700 *
98.0	51.2	102.3	9 500 *
102.0	48.9	98.2	9 300 *
106.0	46.4	93.8	9 200 *

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

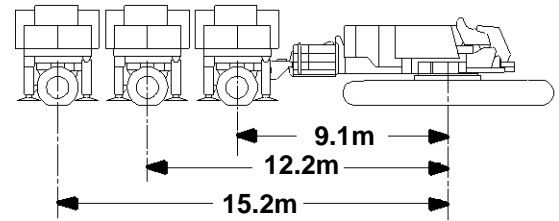

61.0m (200 Ft.) Boom

30.5m (100 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
19.8	80.6	93.3	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	19.8
20.0	80.5	93.3	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	20 700 *	20.0
22.0	79.2	92.9	20 200 *	20 200 *	20 200 *	20 200 *	20 200 *	20 200 *	22.0
24.0	77.9	92.4	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	24.0
26.0	76.6	91.8	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	26.0
28.0	75.4	91.3	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	28.0
30.0	74.0	90.6	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	30.0
32.0	72.7	90.0	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	32.0
34.0	71.4	89.2	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	34.0
36.0	70.1	88.5	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	17 300 *	36.0
38.0	68.7	87.6	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	38.0
40.0	67.4	86.7	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	40.0
42.0	66.0	85.8	16 000 *	16 000 *	16 000 *	16 000 *	16 000 *	16 000 *	42.0
44.0	64.6	84.8	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	44.0
46.0	63.2	83.7	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	46.0
50.0	60.3	81.4	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	50.0
54.0	57.3	78.8	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	54.0
58.0	54.2	75.8	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	58.0
62.0	51.0	72.5	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	62.0
66.0	47.6	68.8	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	66.0
70.0	44.0	64.7	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	70.0
74.0	40.1	59.9	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	74.0
78.0	35.9	54.4	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	78.0
82.0	31.1	47.9	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	82.0
86.0	25.5	39.8	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	86.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

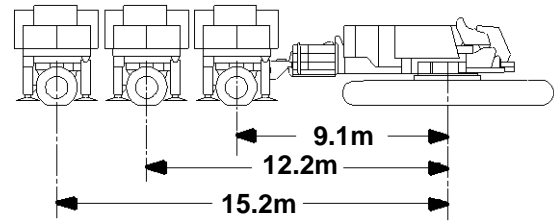

67.1m (220 Ft.) Boom

30.5m (100 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.3	99.2	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	21.3
22.0	79.9	99.1	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	20 300 *	22.0
24.0	78.7	98.6	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	19 900 *	24.0
26.0	77.5	98.2	19 500 *	19 500 *	19 500 *	19 500 *	19 500 *	19 500 *	26.0
28.0	76.3	97.6	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	19 100 *	28.0
30.0	75.1	97.0	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	30.0
32.0	73.8	96.4	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	32.0
34.0	72.6	95.7	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	34.0
36.0	71.4	95.0	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	17 600 *	36.0
38.0	70.1	94.2	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	38.0
40.0	68.9	93.4	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	40.0
42.0	67.6	92.5	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	42.0
44.0	66.3	91.6	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	44.0
46.0	65.0	90.6	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	46.0
50.0	62.3	88.5	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	50.0
54.0	59.6	86.1	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	54.0
58.0	56.8	83.4	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	58.0
62.0	53.9	80.4	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	62.0
66.0	50.9	77.1	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	66.0
70.0	47.7	73.4	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	70.0
74.0	44.3	69.3	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	74.0
78.0	40.8	64.7	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	78.0
82.0	36.9	59.3	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	82.0
86.0	32.6	53.1	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	86.0
90.0	27.6	45.7	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	90.0
94.0	21.6	36.1	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	94.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

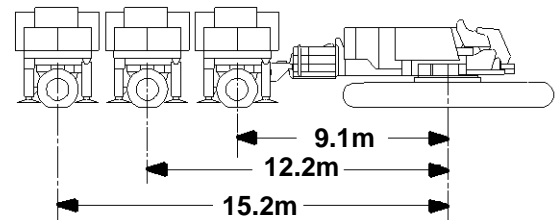

73.2m (240 Ft.) Boom

30.5m (100 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.9	105.4	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	20 500 *	21.3
22.0	80.5	105.3	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	20 400 *	22.0
24.0	79.4	104.9	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	24.0
26.0	78.2	104.4	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	19 600 *	26.0
28.0	77.1	103.9	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	28.0
30.0	76.0	103.4	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	30.0
32.0	74.8	102.8	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	18 500 *	32.0
34.0	73.7	102.2	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	34.0
36.0	72.5	101.5	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	36.0
38.0	71.3	100.8	17 500 *	17 500 *	17 500 *	17 500 *	17 500 *	17 500 *	38.0
40.0	70.2	100.0	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	40.0
42.0	69.0	99.2	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	42.0
44.0	67.8	98.3	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	44.0
46.0	66.6	97.4	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	46.0
50.0	64.1	95.4	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	50.0
54.0	61.6	93.2	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	54.0
58.0	59.0	90.7	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	58.0
62.0	56.4	88.0	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	62.0
66.0	53.6	85.0	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	66.0
70.0	50.8	81.7	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	70.0
74.0	47.8	78.1	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	74.0
78.0	44.6	74.0	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	78.0
82.0	41.3	69.4	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	82.0
86.0	37.7	64.2	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	86.0
90.0	33.8	58.3	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	90.0
94.0	29.3	51.3	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	94.0
98.0	24.1	42.7	8 800	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	98.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

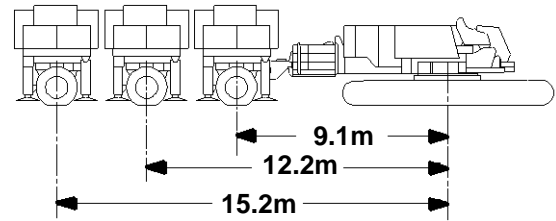

79.2m (260 Ft.) Boom

30.5m (100 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.6	111.4	20 200 *	20 200 *	20 200 *	20 200 *	20 200 *	20 200 *	22.9
24.0	80.0	111.1	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	20 000 *	24.0
26.0	78.9	110.7	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	19 700 *	26.0
28.0	77.8	110.2	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	28.0
30.0	76.8	109.7	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	30.0
32.0	75.7	109.1	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	32.0
34.0	74.6	108.6	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	34.0
36.0	73.5	107.9	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	36.0
38.0	72.4	107.2	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	38.0
40.0	71.3	106.5	17 400 *	17 400 *	17 400 *	17 400 *	17 400 *	17 400 *	40.0
42.0	70.2	105.8	17 000 *	17 000 *	17 000 *	17 000 *	17 000 *	17 000 *	42.0
44.0	69.1	104.9	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	44.0
46.0	68.0	104.1	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	46.0
50.0	65.7	102.2	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	50.0
54.0	63.3	100.2	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	54.0
58.0	60.9	97.9	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	58.0
62.0	58.5	95.4	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	62.0
66.0	56.0	92.7	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	66.0
70.0	53.4	89.6	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	70.0
74.0	50.7	86.3	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	74.0
78.0	47.9	82.7	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	78.0
82.0	44.9	78.6	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	82.0
86.0	41.8	74.1	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	86.0
90.0	38.4	69.1	9 200 *	9 200 *	9 200 *	9 200 *	9 200 *	9 200 *	90.0
94.0	34.8	63.3	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	94.0
98.0	30.8	56.7	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	98.0
102.0	26.2	48.8	3 500 *	3 500 *	3 500 *	3 500 *	3 500 *	3 500 *	102.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

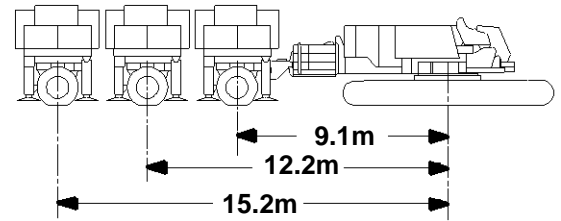

85.3m (280 Ft.) Boom

30.5m (100 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
24.4	80.8	117.2	19 500 *	19 500 *	19 500 *	19 500 *	19 500 *	19 500 *	24.4
26.0	80.0	116.8	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	26.0
28.0	79.0	116.4	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	28.0
30.0	78.0	115.9	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	30.0
32.0	76.9	115.4	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	32.0
34.0	75.9	114.8	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	18 000 *	34.0
36.0	74.9	114.2	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	36.0
38.0	73.9	113.6	17 400 *	17 400 *	17 400 *	17 400 *	17 400 *	17 400 *	38.0
40.0	72.8	112.9	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	40.0
42.0	71.8	112.2	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	42.0
44.0	70.7	111.4	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	44.0
46.0	69.7	110.6	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	46.0
50.0	67.5	108.9	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	50.0
54.0	65.3	107.0	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	54.0
58.0	63.1	104.8	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	58.0
62.0	60.8	102.5	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	62.0
66.0	58.5	100.0	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	66.0
70.0	56.1	97.2	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	70.0
74.0	53.6	94.1	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	74.0
78.0	51.0	90.8	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	78.0
82.0	48.4	87.2	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	82.0
86.0	45.6	83.1	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	86.0
90.0	42.6	78.7	10 700	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	90.0
94.0	39.5	73.8	9 500	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	94.0
98.0	36.1	68.2	8 400	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	98.0
102.0	32.4	61.8	7 300	10 400 *	10 000	10 400 *	10 400 *	10 400 *	102.0
106.0	28.3	54.4	6 400	10 100 *	8 900	10 100 *	10 100 *	10 100 *	106.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

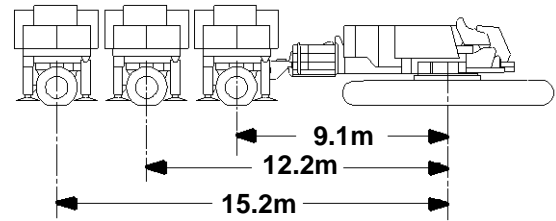

91.4m (300 Ft.) Boom

30.5m (100 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.5	123.1	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	25.9
26.0	80.5	123.1	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	19 200 *	26.0
28.0	79.5	122.6	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	18 900 *	28.0
30.0	78.6	122.2	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	18 600 *	30.0
32.0	77.6	121.7	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	18 300 *	32.0
34.0	76.6	121.2	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	18 100 *	34.0
36.0	75.7	120.6	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	17 800 *	36.0
38.0	74.7	120.0	17 500 *	17 500 *	17 500 *	17 500 *	17 500 *	17 500 *	38.0
40.0	73.7	119.3	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	17 200 *	40.0
42.0	72.7	118.7	17 000 *	17 000 *	17 000 *	17 000 *	17 000 *	17 000 *	42.0
44.0	71.7	117.9	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	44.0
46.0	70.7	117.2	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	46.0
50.0	68.7	115.5	16 000 *	16 000 *	16 000 *	16 000 *	16 000 *	16 000 *	50.0
54.0	66.6	113.7	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	54.0
58.0	64.6	111.8	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	58.0
62.0	62.4	109.6	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	62.0
66.0	60.3	107.2	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	66.0
70.0	58.0	104.6	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	70.0
74.0	55.7	101.8	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	74.0
78.0	53.4	98.7	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	78.0
82.0	50.9	95.4	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	82.0
86.0	48.4	91.8	11 700	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	86.0
90.0	45.8	87.8	10 400	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	90.0
94.0	43.0	83.4	9 100	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	94.0
98.0	40.0	78.5	8 000	10 900 *	10 800	10 900 *	10 900 *	10 900 *	98.0
102.0	36.9	73.1	7 000	10 700 *	9 600	10 700 *	10 700 *	10 700 *	102.0
106.0	33.5	67.0	6 000	10 400 *	8 600	10 400 *	10 400 *	10 400 *	106.0
110.0	29.7	60.0	5 000 *	9 600 *	7 600	10 200 *	10 100	10 200 *	110.0
114.0	25.3	51.6	3 900 *	8 000 *	6 600	9 700 *	9 100	9 700 *	114.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

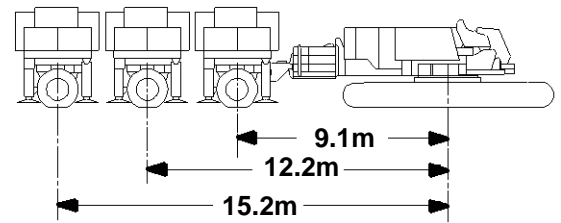

97.5m (320 Ft.) Boom

30.5m (100 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	81.0	129.3	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	25.9
26.0	80.9	129.3	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	19 300 *	26.0
28.0	80.0	128.9	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	19 000 *	28.0
30.0	79.1	128.4	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	18 700 *	30.0
32.0	78.2	128.0	18 400 *	18 400 *	18 400 *	18 400 *	18 400 *	18 400 *	32.0
34.0	77.3	127.5	18 200 *	18 200 *	18 200 *	18 200 *	18 200 *	18 200 *	34.0
36.0	76.4	126.9	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	17 900 *	36.0
38.0	75.4	126.4	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	17 700 *	38.0
40.0	74.5	125.7	17 400 *	17 400 *	17 400 *	17 400 *	17 400 *	17 400 *	40.0
42.0	73.6	125.1	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	17 100 *	42.0
44.0	72.6	124.4	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	44.0
46.0	71.7	123.7	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	46.0
50.0	69.8	122.2	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	50.0
54.0	67.8	120.4	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	54.0
58.0	65.9	118.6	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	58.0
62.0	63.9	116.5	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	62.0
66.0	61.8	114.3	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	66.0
70.0	59.7	111.9	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	70.0
74.0	57.6	109.3	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	74.0
78.0	55.4	106.4	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	78.0
82.0	53.2	103.3	11 700 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	82.0
86.0	50.8	100.0	10 200 *	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	86.0
90.0	48.4	96.4	8 900 *	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	90.0
94.0	45.9	92.4	7 700 *	11 600 *	10 600 *	11 600 *	11 600 *	11 600 *	94.0
98.0	43.3	88.1	6 500 *	11 300 *	9 300 *	11 300 *	11 300 *	11 300 *	98.0
102.0	40.5	83.3	5 200 *	11 000 *	8 200 *	11 000 *	10 900 *	11 000 *	102.0
106.0	37.6	78.0	4 100 *	10 100 *	7 100 *	10 700 *	9 700 *	10 700 *	106.0
110.0	34.4	72.1	3 000 *	8 400 *	6 100 *	10 500 *	8 600 *	10 500 *	110.0
114.0	30.9	65.4	1 900 *	6 800 *	5 000 *	10 300 *	7 600 *	10 300 *	114.0
118.0	27.0	57.5		5 200 *	3 900 *	10 000 *	6 600 *	10 000 *	118.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

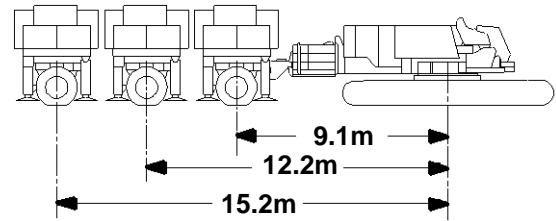

103.6m (340 Ft.) Boom
30.5m (100 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
27.4	80.7	135.2	19 000 *	19 000 *	19 000 *	19 000 *	27.4
28.0	80.5	135.1	18 900 *	18 900 *	18 900 *	18 900 *	28.0
30.0	79.6	134.7	18 600 *	18 600 *	18 600 *	18 600 *	30.0
32.0	78.8	134.2	18 400 *	18 400 *	18 400 *	18 400 *	32.0
34.0	77.9	133.8	18 100 *	18 100 *	18 100 *	18 100 *	34.0
36.0	77.0	133.2	17 900 *	17 900 *	17 900 *	17 900 *	36.0
38.0	76.1	132.7	17 700 *	17 700 *	17 700 *	17 700 *	38.0
40.0	75.2	132.1	17 400 *	17 400 *	17 400 *	17 400 *	40.0
42.0	74.3	131.5	17 200 *	17 200 *	17 200 *	17 200 *	42.0
44.0	73.4	130.9	16 900 *	16 900 *	16 900 *	16 900 *	44.0
46.0	72.5	130.2	16 700 *	16 700 *	16 700 *	16 700 *	46.0
50.0	70.7	128.7	16 300 *	16 300 *	16 300 *	16 300 *	50.0
54.0	68.9	127.1	15 900 *	15 900 *	15 900 *	15 900 *	54.0
58.0	67.0	125.3	15 400 *	15 400 *	15 400 *	15 400 *	58.0
62.0	65.1	123.4	14 900 *	14 900 *	14 900 *	14 900 *	62.0
66.0	63.2	121.3	14 500 *	14 500 *	14 500 *	14 500 *	66.0
70.0	61.3	119.0	14 100 *	14 100 *	14 100 *	14 100 *	70.0
74.0	59.3	116.6	13 700 *	13 700 *	13 700 *	13 700 *	74.0
78.0	57.2	113.9	13 300 *	13 300 *	13 300 *	13 300 *	78.0
82.0	55.1	111.0	12 900 *	12 900 *	12 900 *	12 900 *	82.0
86.0	53.0	108.0	12 500 *	12 500 *	12 500 *	12 500 *	86.0
90.0	50.8	104.6	11 600 *	12 200 *	12 200 *	12 200 *	90.0
94.0	48.5	101.0	10 200 *	11 900 *	11 900 *	11 900 *	94.0
98.0	46.1	97.0	9 000 *	11 600 *	11 600 *	11 600 *	98.0
102.0	43.6	92.7	7 800 *	11 200 *	10 500 *	11 200 *	102.0
106.0	40.9	88.0	6 800 *	11 000 *	9 400 *	11 000 *	106.0
110.0	38.2	82.9	5 600 *	10 700 *	8 300 *	10 700 *	110.0
114.0	35.2	77.1	4 500 *	10 500 *	7 200 *	10 500 *	114.0
118.0	32.0	70.7	3 500 *	10 300 *	6 300 *	10 300 *	118.0
122.0	28.4	63.3	2 500 *	9 200 *	5 300 *	10 200 *	122.0
126.0	24.3	54.5		7 500 *	4 300 *	9 800 *	126.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

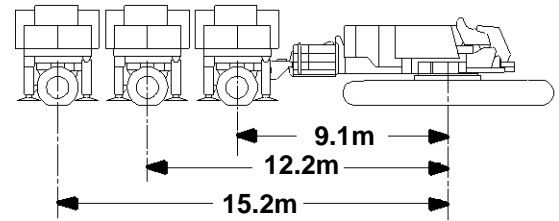

109.7m (360 Ft.) Boom 30.5m (100 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position	
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms
29.0	80.5	141.1	18 600 *	18 600 *
30.0	80.1	140.9	18 500 *	18 500 *
32.0	79.3	140.5	18 200 *	18 200 *
34.0	78.4	140.0	18 000 *	18 000 *
36.0	77.6	139.5	17 800 *	17 800 *
38.0	76.7	139.0	17 600 *	17 600 *
40.0	75.9	138.5	17 300 *	17 300 *
42.0	75.0	137.9	17 100 *	17 100 *
44.0	74.2	137.3	16 900 *	16 900 *
46.0	73.3	136.6	16 700 *	16 700 *
50.0	71.6	135.2	16 300 *	16 300 *
54.0	69.9	133.7	15 900 *	15 900 *
58.0	68.1	132.0	15 500 *	15 500 *
62.0	66.3	130.2	15 100 *	15 100 *
66.0	64.5	128.2	14 600 *	14 600 *
70.0	62.6	126.1	14 200 *	14 200 *
74.0	60.8	123.7	13 800 *	13 800 *
78.0	58.8	121.2	13 500 *	13 500 *
82.0	56.9	118.6	13 100 *	13 100 *
86.0	54.9	115.7	12 800 *	12 800 *
90.0	52.8	112.6	12 400 *	12 400 *
94.0	50.7	109.2	12 100 *	12 100 *
98.0	48.5	105.6	11 800 *	11 800 *
102.0	46.2	101.7	11 500 *	11 500 *
106.0	43.8	97.4	11 200 *	11 200 *
110.0	41.3	92.8	11 000 *	11 000 *
114.0	38.7	87.7	10 700 *	10 700 *
118.0	35.9	82.1	10 500 *	10 500 *
122.0	32.9	75.9	9 700 *	10 300 *
126.0	29.6	68.8	8 100 *	10 200 *
130.0	25.9	60.6	6 600 *	9 200 *

115.8m (380 Ft.) Boom 30.5m (100 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
29.0	80.9	147.3	18 400 *
30.0	80.5	147.1	18 300 *
32.0	79.7	146.7	18 100 *
34.0	78.9	146.3	17 900 *
36.0	78.1	145.8	17 700 *
38.0	77.3	145.3	17 500 *
40.0	76.5	144.8	17 300 *
42.0	75.7	144.2	17 100 *
44.0	74.9	143.6	16 900 *
46.0	74.1	143.0	16 700 *
50.0	72.4	141.7	16 300 *
54.0	70.7	140.2	15 900 *
58.0	69.1	138.6	15 500 *
62.0	67.4	136.9	15 200 *
66.0	65.6	135.0	14 800 *
70.0	63.9	133.0	14 400 *
74.0	62.1	130.8	14 000 *
78.0	60.3	128.4	13 600 *
82.0	58.4	125.9	13 300 *
86.0	56.6	123.2	13 000 *
90.0	54.6	120.3	12 600 *
94.0	52.6	117.2	12 300 *
98.0	50.6	113.8	12 000 *
102.0	48.5	110.2	11 700 *
106.0	46.3	106.3	11 500 *
110.0	44.1	102.1	11 200 *
114.0	41.7	97.5	10 900 *
118.0	39.2	92.5	10 700 *
122.0	36.6	87.1	10 500 *
126.0	33.7	81.0	10 300 *
130.0	30.6	74.2	8 800 *
134.0	27.2	66.5	6 900 *
138.0	23.3	57.3	5 100 *




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

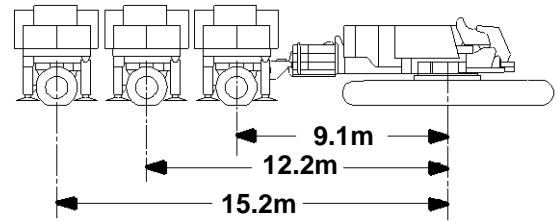

61.0m (200 Ft.) Boom

30.5m (100 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.5	91.0	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	25.9
26.0	80.4	91.0	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	26.0
28.0	79.1	90.4	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	28.0
30.0	77.8	89.8	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	30.0
32.0	76.4	89.1	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	32.0
34.0	75.1	88.4	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	34.0
36.0	73.8	87.6	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	36.0
38.0	72.4	86.8	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	38.0
40.0	71.0	85.9	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	40.0
42.0	69.6	84.9	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	42.0
44.0	68.2	83.9	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	44.0
46.0	66.8	82.8	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	46.0
50.0	63.9	80.4	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	50.0
54.0	60.9	77.8	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	54.0
58.0	57.7	74.8	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	58.0
62.0	54.5	71.5	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	62.0
66.0	51.0	67.7	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	66.0
70.0	47.3	63.5	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	70.0
74.0	43.4	58.6	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	74.0
78.0	39.0	52.9	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	78.0
82.0	34.1	46.2	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	82.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

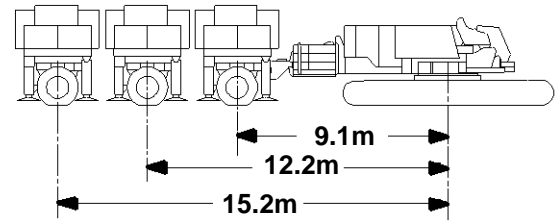

67.1m (220 Ft.) Boom
30.5m (100 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
27.4	80.1	96.9	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	27.4
28.0	79.8	96.8	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	28.0
30.0	78.6	96.2	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	30.0
32.0	77.3	95.5	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	32.0
34.0	76.1	94.9	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	34.0
36.0	74.8	94.1	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	36.0
38.0	73.6	93.3	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	38.0
40.0	72.3	92.5	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	40.0
42.0	71.0	91.6	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	42.0
44.0	69.7	90.7	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	44.0
46.0	68.4	89.7	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	46.0
50.0	65.7	87.5	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	50.0
54.0	63.0	85.1	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	54.0
58.0	60.1	82.4	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	58.0
62.0	57.2	79.4	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	62.0
66.0	54.1	76.0	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	66.0
70.0	50.9	72.3	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	70.0
74.0	47.5	68.1	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	74.0
78.0	43.8	63.3	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	78.0
82.0	39.8	57.9	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	82.0
86.0	35.4	51.5	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	86.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

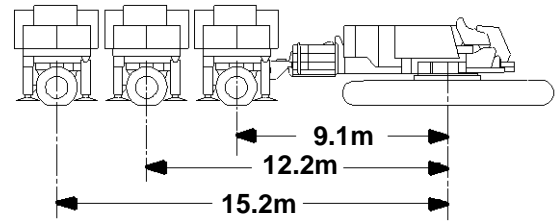

73.2m (240 Ft.) Boom

30.5m (100 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
27.4	80.7	103.2	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	27.4
28.0	80.4	103.0	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	16 800 *	28.0
30.0	79.3	102.5	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	30.0
32.0	78.1	101.9	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	32.0
34.0	76.9	101.3	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	34.0
36.0	75.8	100.6	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	36.0
38.0	74.6	99.9	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	38.0
40.0	73.4	99.1	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	40.0
42.0	72.2	98.3	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	42.0
44.0	71.0	97.4	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	44.0
46.0	69.8	96.5	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	46.0
50.0	67.3	94.4	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	50.0
54.0	64.8	92.2	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	54.0
58.0	62.1	89.7	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	58.0
62.0	59.5	87.0	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	62.0
66.0	56.7	84.0	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	66.0
70.0	53.8	80.6	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	70.0
74.0	50.8	76.9	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	74.0
78.0	47.6	72.7	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	78.0
82.0	44.2	68.1	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	82.0
86.0	40.5	62.8	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	86.0
90.0	36.4	56.7	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	90.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

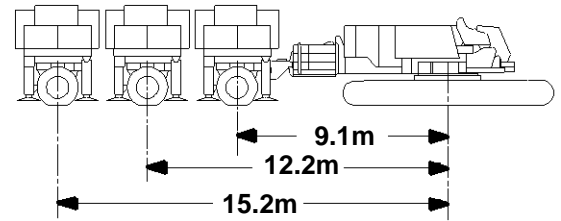

79.2m (260 Ft.) Boom
30.5m (100 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
29.0	80.4	109.1	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	29.0
30.0	79.9	108.8	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	30.0
32.0	78.8	108.2	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	32.0
34.0	77.7	107.6	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	34.0
36.0	76.6	107.0	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	36.0
38.0	75.5	106.3	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	38.0
40.0	74.4	105.6	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	40.0
42.0	73.3	104.8	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	42.0
44.0	72.1	104.0	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	44.0
46.0	71.0	103.1	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	46.0
50.0	68.7	101.3	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	50.0
54.0	66.3	99.2	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	54.0
58.0	63.9	96.9	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	58.0
62.0	61.4	94.4	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	62.0
66.0	58.9	91.6	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	66.0
70.0	56.2	88.5	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	70.0
74.0	53.5	85.2	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	74.0
78.0	50.6	81.5	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	78.0
82.0	47.6	77.3	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	82.0
86.0	44.5	72.8	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	86.0
90.0	41.0	67.6	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	90.0
94.0	37.3	61.7	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	94.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

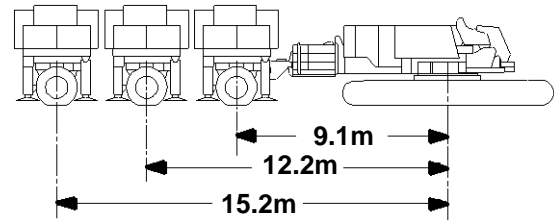

85.3m (280 Ft.) Boom

30.5m (100 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
30.5	80.4	114.8	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	16 400 *	30.5
32.0	79.6	114.4	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	32.0
34.0	78.6	113.9	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	34.0
36.0	77.6	113.3	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	36.0
38.0	76.5	112.6	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	38.0
40.0	75.5	111.9	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	40.0
42.0	74.4	111.2	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	42.0
44.0	73.3	110.4	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	44.0
46.0	72.3	109.6	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	46.0
50.0	70.1	107.9	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	50.0
54.0	67.9	105.9	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	54.0
58.0	65.6	103.8	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	58.0
62.0	63.3	101.4	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	62.0
66.0	61.0	98.9	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	66.0
70.0	58.5	96.1	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	70.0
74.0	56.0	93.0	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	74.0
78.0	53.4	89.6	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	78.0
82.0	50.7	85.9	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	82.0
86.0	47.9	81.8	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	86.0
90.0	44.9	77.3	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	90.0
94.0	41.7	72.2	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	94.0
98.0	38.2	66.5	8 800	9 200 *	9 200 *	9 200 *	9 200 *	9 200 *	98.0
102.0	34.4	60.0	7 600	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	102.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

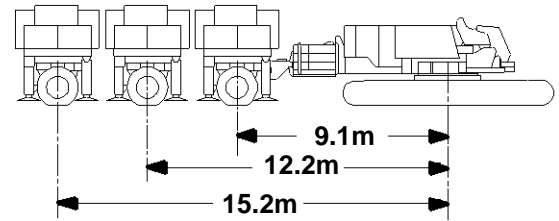

91.4m (300 Ft.) Boom
30.5m (100 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
30.5	80.9	121.1	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	30.5
32.0	80.2	120.7	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	16 200 *	32.0
34.0	79.2	120.2	16 000 *	16 000 *	16 000 *	16 000 *	16 000 *	16 000 *	34.0
36.0	78.2	119.6	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	36.0
38.0	77.2	119.0	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	38.0
40.0	76.2	118.4	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	40.0
42.0	75.2	117.7	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	42.0
44.0	74.2	116.9	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	44.0
46.0	73.2	116.2	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	46.0
50.0	71.2	114.5	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	50.0
54.0	69.1	112.7	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	54.0
58.0	67.0	110.7	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	58.0
62.0	64.8	108.5	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	62.0
66.0	62.6	106.1	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	66.0
70.0	60.4	103.5	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	70.0
74.0	58.1	100.6	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	74.0
78.0	55.7	97.5	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	78.0
82.0	53.2	94.2	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	82.0
86.0	50.6	90.5	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	86.0
90.0	48.0	86.4	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	90.0
94.0	45.1	82.0	9 700	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	94.0
98.0	42.1	77.0	8 500	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	98.0
102.0	38.9	71.5	7 400	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	102.0
106.0	35.4	65.2	6 400	9 000 *	8 900	9 000 *	9 000 *	9 000 *	106.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
 ANSI B30.5
 Requirements

MAX-ER 2000 On 2250

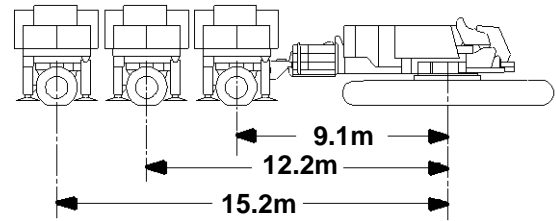

97.5m (320 Ft.) Boom

30.5m (100 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
32.0	80.6	127.0	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	32.0
34.0	79.7	126.5	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	34.0
36.0	78.8	125.9	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	36.0
38.0	77.8	125.4	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	38.0
40.0	76.9	124.8	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	40.0
42.0	76.0	124.1	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	42.0
44.0	75.0	123.4	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	44.0
46.0	74.1	122.7	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	46.0
50.0	72.1	121.1	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	50.0
54.0	70.2	119.4	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	13 900 *	54.0
58.0	68.2	117.5	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	58.0
62.0	66.2	115.5	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	62.0
66.0	64.1	113.2	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	12 700 *	66.0
70.0	62.0	110.8	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	70.0
74.0	59.8	108.1	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	74.0
78.0	57.6	105.2	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	78.0
82.0	55.4	102.1	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	82.0
86.0	53.0	98.7	10 900 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	86.0
90.0	50.6	95.1	9 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	90.0
94.0	48.0	91.0	8 300 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	94.0
98.0	45.3	86.6	7 100 *	9 900 *	9 800 *	9 900 *	9 900 *	9 900 *	98.0
102.0	42.5	81.8	5 900 *	9 600 *	8 700 *	9 600 *	9 600 *	9 600 *	102.0
106.0	39.5	76.4	4 600 *	9 300 *	7 600 *	9 300 *	9 300 *	9 300 *	106.0
110.0	36.2	70.3	3 500 *	9 000 *	6 500 *	9 100 *	9 000 *	9 100 *	110.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

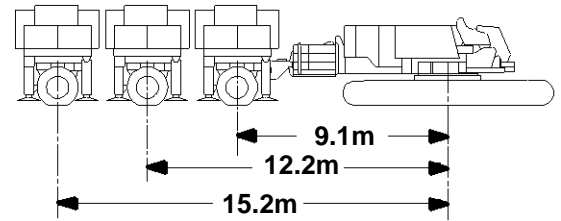

103.6m (340 Ft.) Boom
30.5m (100 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
33.5	80.4	132.9	16 100 *	16 100 *	16 100 *	16 100 *	33.5
34.0	80.2	132.8	16 100 *	16 100 *	16 100 *	16 100 *	34.0
36.0	79.3	132.2	15 900 *	15 900 *	15 900 *	15 900 *	36.0
38.0	78.4	131.7	15 700 *	15 700 *	15 700 *	15 700 *	38.0
40.0	77.5	131.1	15 400 *	15 400 *	15 400 *	15 400 *	40.0
42.0	76.6	130.5	15 200 *	15 200 *	15 200 *	15 200 *	42.0
44.0	75.7	129.8	15 000 *	15 000 *	15 000 *	15 000 *	44.0
46.0	74.8	129.2	14 800 *	14 800 *	14 800 *	14 800 *	46.0
50.0	73.0	127.7	14 400 *	14 400 *	14 400 *	14 400 *	50.0
54.0	71.1	126.0	14 000 *	14 000 *	14 000 *	14 000 *	54.0
58.0	69.3	124.3	13 600 *	13 600 *	13 600 *	13 600 *	58.0
62.0	67.4	122.3	13 300 *	13 300 *	13 300 *	13 300 *	62.0
66.0	65.4	120.2	13 000 *	13 000 *	13 000 *	13 000 *	66.0
70.0	63.4	117.9	12 600 *	12 600 *	12 600 *	12 600 *	70.0
74.0	61.4	115.4	12 300 *	12 300 *	12 300 *	12 300 *	74.0
78.0	59.4	112.7	12 000 *	12 000 *	12 000 *	12 000 *	78.0
82.0	57.2	109.8	11 800 *	11 800 *	11 800 *	11 800 *	82.0
86.0	55.1	106.7	11 400 *	11 400 *	11 400 *	11 400 *	86.0
90.0	52.8	103.3	11 000 *	11 000 *	11 000 *	11 000 *	90.0
94.0	50.5	99.6	10 600 *	10 600 *	10 600 *	10 600 *	94.0
98.0	48.1	95.6	9 600	10 300 *	10 300 *	10 300 *	98.0
102.0	45.5	91.3	8 400	9 900 *	9 900 *	9 900 *	102.0
106.0	42.9	86.5	7 300	9 600 *	9 600 *	9 600 *	106.0
110.0	40.0	81.2	6 200	9 400 *	8 700	9 400 *	110.0
114.0	37.0	75.4	5 000 *	9 100 *	7 700	9 100 *	114.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

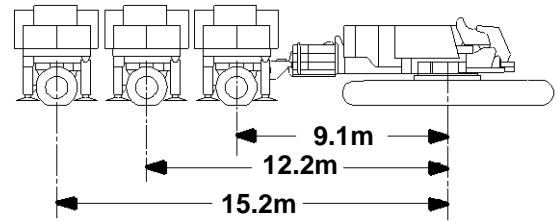

109.7m (360 Ft.) Boom 30.5m (100 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position	
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms
33.5	80.8	139.1	16 100 *	16 100 *
34.0	80.6	139.0	16 000 *	16 000 *
36.0	79.8	138.5	15 900 *	15 900 *
38.0	78.9	138.0	15 700 *	15 700 *
40.0	78.1	137.4	15 400 *	15 400 *
42.0	77.2	136.9	15 300 *	15 300 *
44.0	76.4	136.2	15 100 *	15 100 *
46.0	75.5	135.6	14 800 *	14 800 *
50.0	73.8	134.2	14 500 *	14 500 *
54.0	72.0	132.6	14 100 *	14 100 *
58.0	70.2	130.9	13 800 *	13 800 *
62.0	68.4	129.1	13 400 *	13 400 *
66.0	66.6	127.1	13 100 *	13 100 *
70.0	64.7	124.9	12 800 *	12 800 *
74.0	62.8	122.6	12 500 *	12 500 *
78.0	60.9	120.1	12 200 *	12 200 *
82.0	58.9	117.4	11 900 *	11 900 *
86.0	56.9	114.4	11 700 *	11 700 *
90.0	54.8	111.3	11 300 *	11 300 *
94.0	52.6	107.9	10 900 *	10 900 *
98.0	50.4	104.2	10 600 *	10 600 *
102.0	48.1	100.3	10 300 *	10 300 *
106.0	45.7	95.9	9 900 *	9 900 *
110.0	43.2	91.2	9 600 *	9 600 *
114.0	40.5	86.1	9 400 *	9 400 *
118.0	37.6	80.4	9 200 *	9 200 *
122.0	34.5	74.0	9 000 *	9 000 *

115.8m (380 Ft.) Boom 30.5m (100 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
35.1	80.6	145.0	15 900 *
36.0	80.2	144.8	15 800 *
38.0	79.4	144.3	15 600 *
40.0	78.6	143.8	15 500 *
42.0	77.8	143.2	15 200 *
44.0	77.0	142.6	15 100 *
46.0	76.1	142.0	14 900 *
50.0	74.5	140.6	14 600 *
54.0	72.8	139.2	14 200 *
58.0	71.1	137.6	13 900 *
62.0	69.4	135.8	13 600 *
66.0	67.7	133.9	13 200 *
70.0	65.9	131.9	12 900 *
74.0	64.1	129.7	12 600 *
78.0	62.3	127.3	12 400 *
82.0	60.4	124.7	12 100 *
86.0	58.5	122.0	11 800 *
90.0	56.5	119.0	11 600 *
94.0	54.5	115.9	11 200 *
98.0	52.5	112.5	10 900 *
102.0	50.4	108.8	10 600 *
106.0	48.1	104.9	10 200 *
110.0	45.8	100.6	10 000 *
114.0	43.4	96.0	9 700 *
118.0	40.9	90.9	9 400 *
122.0	38.2	85.3	9 200 *
126.0	35.3	79.1	9 000 *

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
Boom No. 79-44 with 39.6m Mast No. 44
76 750 kg Crane Counterweight
27 220 kg Carbody Counterweight
108 860 kg and 209 560 kg Wheeled Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

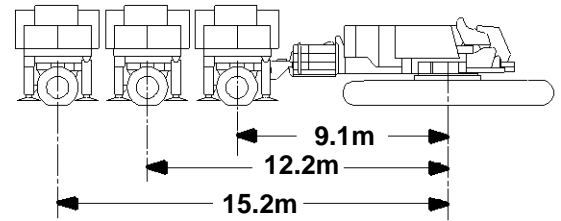

61.0m (200 Ft.) Boom
30.5m (100 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
32.0	80.6	87.2	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	32.0
34.0	79.2	86.5	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	34.0
36.0	77.8	85.7	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	36.0
38.0	76.4	84.8	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	38.0
40.0	75.0	83.9	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	40.0
42.0	73.6	82.9	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	42.0
44.0	72.1	81.9	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	44.0
46.0	70.7	80.8	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	46.0
50.0	67.7	78.4	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	50.0
54.0	64.6	75.7	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	54.0
58.0	61.4	72.6	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	58.0
62.0	58.0	69.2	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	62.0
66.0	54.4	65.3	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	66.0
70.0	50.6	60.9	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	70.0
74.0	46.4	55.9	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	74.0

67.1m (220 Ft.) Boom
30.5m (100 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
33.5	80.2	93.0	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	33.5
34.0	79.9	92.9	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	34.0
36.0	78.6	92.1	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	36.0
38.0	77.4	91.3	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	38.0
40.0	76.0	90.5	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	40.0
42.0	74.7	89.6	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	42.0
44.0	73.4	88.6	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	44.0
46.0	72.0	87.6	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	46.0
50.0	69.3	85.4	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	50.0
54.0	66.5	83.0	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	54.0
58.0	63.6	80.2	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	58.0
62.0	60.5	77.1	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	62.0
66.0	57.4	73.7	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	66.0
70.0	54.0	69.8	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	70.0
74.0	50.5	65.5	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	74.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

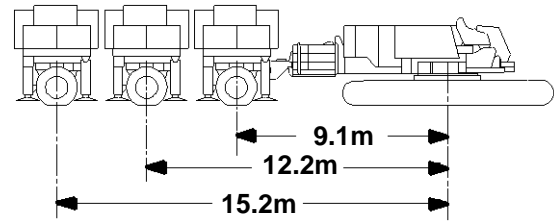

73.2m (240 Ft.) Boom

30.5m (100 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
33.5	80.8	99.4	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	33.5
34.0	80.6	99.2	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	34.0
36.0	79.4	98.6	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	36.0
38.0	78.2	97.8	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	38.0
40.0	76.9	97.0	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	40.0
42.0	75.7	96.2	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	42.0
44.0	74.5	95.3	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	44.0
46.0	73.2	94.4	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	46.0
50.0	70.7	92.3	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	50.0
54.0	68.1	90.0	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	54.0
58.0	65.4	87.5	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	58.0
62.0	62.7	84.7	6 700 *	6 700 *	6 700 *	6 700 *	6 700 *	6 700 *	62.0
66.0	59.8	81.6	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	66.0
70.0	56.8	78.2	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	70.0
74.0	53.7	74.4	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	74.0
78.0	50.4	70.1	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	78.0
82.0	46.8	65.2	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	82.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

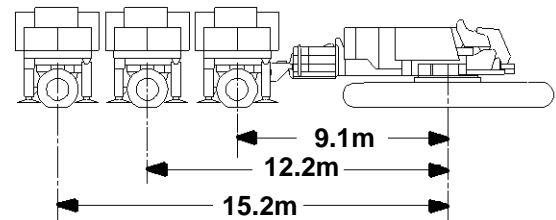

79.2m (260 Ft.) Boom
30.5m (100 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
35.1	80.5	105.2	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	35.1
36.0	80.0	104.9	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	36.0
38.0	78.9	104.2	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	38.0
40.0	77.7	103.5	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	40.0
42.0	76.6	102.7	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	42.0
44.0	75.4	101.9	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	44.0
46.0	74.3	101.0	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	46.0
50.0	71.9	99.1	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	50.0
54.0	69.5	97.0	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	54.0
58.0	67.0	94.7	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	58.0
62.0	64.5	92.1	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	62.0
66.0	61.9	89.3	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	66.0
70.0	59.2	86.1	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	70.0
74.0	56.3	82.7	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	74.0
78.0	53.4	78.9	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	78.0
82.0	50.3	74.6	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	82.0
86.0	47.0	69.9	4 600 *	4 600 *	4 600 *	4 600 *	4 600 *	4 600 *	86.0

PRELIMINARY ONLY




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

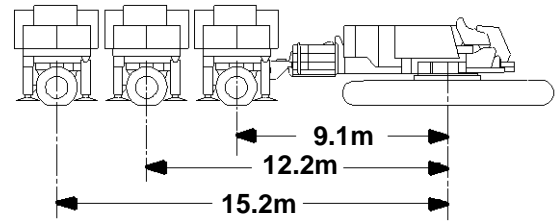

85.3m (280 Ft.) Boom
30.5m (100 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
35.1	80.9	111.7	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	35.1
36.0	80.4	111.4	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	36.0
38.0	79.4	110.7	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	38.0
40.0	78.3	110.1	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	40.0
42.0	77.2	109.3	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	42.0
44.0	76.1	108.5	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	44.0
46.0	75.1	107.7	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	46.0
50.0	72.8	105.9	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	50.0
54.0	70.6	104.0	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	54.0
58.0	68.3	101.8	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	58.0
62.0	65.9	99.4	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	62.0
66.0	63.5	96.8	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	66.0
70.0	61.1	94.0	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	70.0
74.0	58.5	90.8	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	74.0
78.0	55.8	87.4	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	78.0
82.0	53.0	83.6	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	82.0
86.0	50.1	79.4	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	86.0
90.0	47.0	74.7	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	90.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

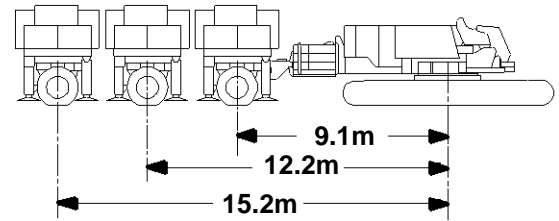

91.4m (300 Ft.) Boom
30.5m (100 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
36.6	80.7	117.5	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	36.6
38.0	79.9	117.1	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	38.0
40.0	78.9	116.4	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	40.0
42.0	77.9	115.8	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	42.0
44.0	76.9	115.0	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	44.0
46.0	75.9	114.3	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	46.0
50.0	73.8	112.6	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	50.0
54.0	71.7	110.7	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	54.0
58.0	69.5	108.7	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	58.0
62.0	67.3	106.5	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	62.0
66.0	65.1	104.1	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	66.0
70.0	62.8	101.4	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	70.0
74.0	60.4	98.5	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	74.0
78.0	58.0	95.3	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	78.0
82.0	55.5	91.9	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	82.0
86.0	52.8	88.1	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	86.0
90.0	50.1	84.0	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	90.0
94.0	47.1	79.4	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	94.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

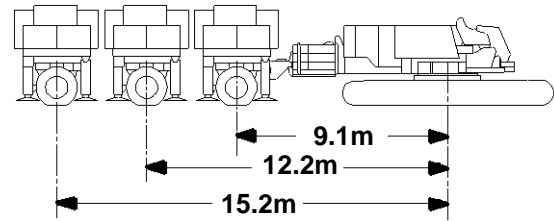

97.5m (320 Ft.) Boom

30.5m (100 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
38.1	80.4	123.4	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	38.1
40.0	79.5	122.8	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	40.0
42.0	78.5	122.2	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	42.0
44.0	77.6	121.5	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	44.0
46.0	76.6	120.7	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	46.0
50.0	74.6	119.2	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	50.0
54.0	72.6	117.4	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	54.0
58.0	70.6	115.5	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	58.0
62.0	68.6	113.4	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	62.0
66.0	66.5	111.1	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	66.0
70.0	64.3	108.7	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	70.0
74.0	62.1	106.0	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	74.0
78.0	59.9	103.1	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	78.0
82.0	57.5	99.9	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	82.0
86.0	55.1	96.4	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	86.0
90.0	52.6	92.7	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	90.0
94.0	50.0	88.6	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	94.0
98.0	47.2	84.0	7 500 *	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	98.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

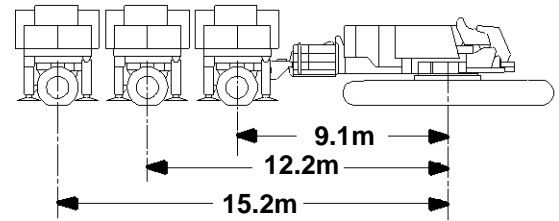

103.6m (340 Ft.) Boom
30.5m (100 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
38.1	80.9	129.7	12 200 *	12 200 *	12 200 *	12 200 *	38.1
40.0	80.0	129.1	12 000 *	12 000 *	12 000 *	12 000 *	40.0
42.0	79.1	128.5	11 800 *	11 800 *	11 800 *	11 800 *	42.0
44.0	78.2	127.9	11 500 *	11 500 *	11 500 *	11 500 *	44.0
46.0	77.2	127.2	11 300 *	11 300 *	11 300 *	11 300 *	46.0
50.0	75.4	125.7	10 900 *	10 900 *	10 900 *	10 900 *	50.0
54.0	73.5	124.0	10 500 *	10 500 *	10 500 *	10 500 *	54.0
58.0	71.6	122.2	10 100 *	10 100 *	10 100 *	10 100 *	58.0
62.0	69.7	120.3	9 800 *	9 800 *	9 800 *	9 800 *	62.0
66.0	67.7	118.1	9 500 *	9 500 *	9 500 *	9 500 *	66.0
70.0	65.7	115.8	9 200 *	9 200 *	9 200 *	9 200 *	70.0
74.0	63.6	113.3	8 900 *	8 900 *	8 900 *	8 900 *	74.0
78.0	61.5	110.6	8 700 *	8 700 *	8 700 *	8 700 *	78.0
82.0	59.3	107.6	8 400 *	8 400 *	8 400 *	8 400 *	82.0
86.0	57.1	104.4	8 300 *	8 300 *	8 300 *	8 300 *	86.0
90.0	54.8	101.0	8 100 *	8 100 *	8 100 *	8 100 *	90.0
94.0	52.4	97.2	7 900 *	7 900 *	7 900 *	7 900 *	94.0
98.0	49.9	93.1	7 700 *	7 700 *	7 700 *	7 700 *	98.0
102.0	47.3	88.7	7 600 *	7 600 *	7 600 *	7 600 *	102.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

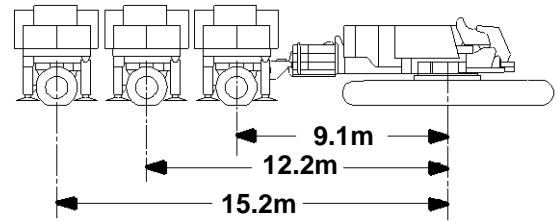

109.7m (360 Ft.) Boom 30.5m (100 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position	
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms
39.6	80.6	135.6	12 200 *	12 200 *
40.0	80.5	135.5	12 200 *	12 200 *
42.0	79.6	134.9	11 900 *	11 900 *
44.0	78.7	134.2	11 700 *	11 700 *
46.0	77.8	133.6	11 400 *	11 400 *
50.0	76.1	132.2	11 000 *	11 000 *
54.0	74.3	130.6	10 600 *	10 600 *
58.0	72.5	128.9	10 300 *	10 300 *
62.0	70.6	127.0	10 000 *	10 000 *
66.0	68.8	125.0	9 700 *	9 700 *
70.0	66.9	122.8	9 400 *	9 400 *
74.0	64.9	120.5	9 100 *	9 100 *
78.0	63.0	117.9	8 900 *	8 900 *
82.0	61.0	115.2	8 600 *	8 600 *
86.0	58.9	112.2	8 400 *	8 400 *
90.0	56.7	109.0	8 200 *	8 200 *
94.0	54.5	105.5	8 000 *	8 000 *
98.0	52.3	101.8	7 900 *	7 900 *
102.0	49.9	97.7	7 700 *	7 700 *
106.0	47.4	93.3	7 600 *	7 600 *

115.8m (380 Ft.) Boom 30.5m (100 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
39.6	81.0	141.9	12 300 *
40.0	80.9	141.7	12 300 *
42.0	80.0	141.2	12 100 *
44.0	79.2	140.6	11 800 *
46.0	78.4	140.0	11 600 *
50.0	76.7	138.6	11 200 *
54.0	75.0	137.1	10 800 *
58.0	73.3	135.5	10 500 *
62.0	71.5	133.7	10 100 *
66.0	69.8	131.8	9 800 *
70.0	68.0	129.7	9 500 *
74.0	66.1	127.5	9 300 *
78.0	64.3	125.1	9 100 *
82.0	62.4	122.5	8 800 *
86.0	60.4	119.7	8 600 *
90.0	58.5	116.7	8 400 *
94.0	56.4	113.5	8 200 *
98.0	54.3	110.1	8 000 *
102.0	52.1	106.3	7 900 *
106.0	49.9	102.3	7 700 *
110.0	47.5	97.9	7 600 *

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

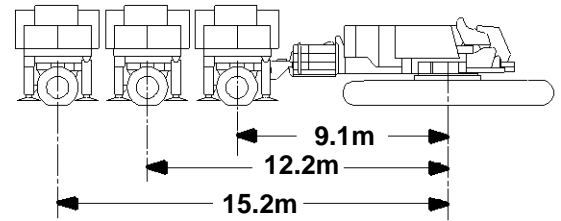

61.0m (200 Ft.) Boom

36.6m (120 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.1	99.3	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	21.3
22.0	79.7	99.1	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	22.0
24.0	78.5	98.7	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	24.0
26.0	77.3	98.2	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	26.0
28.0	76.1	97.7	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	28.0
30.0	74.9	97.1	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	30.0
32.0	73.7	96.4	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	32.0
34.0	72.4	95.8	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	34.0
36.0	71.2	95.0	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	36.0
38.0	69.9	94.3	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	38.0
40.0	68.7	93.4	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	40.0
42.0	67.4	92.6	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	42.0
44.0	66.1	91.6	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	44.0
46.0	64.8	90.6	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	46.0
50.0	62.2	88.5	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	50.0
54.0	59.4	86.1	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	54.0
58.0	56.6	83.4	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	58.0
62.0	53.7	80.5	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	62.0
66.0	50.7	77.2	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	66.0
70.0	47.5	73.5	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	70.0
74.0	44.2	69.4	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	74.0
78.0	40.6	64.7	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	78.0
82.0	36.7	59.4	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	82.0
86.0	32.4	53.2	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	86.0
90.0	27.5	45.7	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	90.0
94.0	21.4	36.2	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	94.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

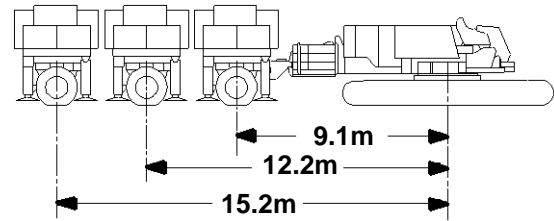

67.1m (220 Ft.) Boom

36.6m (120 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
21.3	80.7	105.5	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	16 900 *	21.3
22.0	80.3	105.3	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	16 700 *	22.0
24.0	79.2	104.9	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	16 300 *	24.0
26.0	78.1	104.5	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	26.0
28.0	76.9	104.0	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	28.0
30.0	75.8	103.4	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	30.0
32.0	74.7	102.8	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	14 500 *	32.0
34.0	73.5	102.2	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	34.0
36.0	72.3	101.5	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	36.0
38.0	71.2	100.8	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	38.0
40.0	70.0	100.0	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	40.0
42.0	68.8	99.2	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	42.0
44.0	67.6	98.3	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	12 100 *	44.0
46.0	66.4	97.4	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	46.0
50.0	63.9	95.4	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	50.0
54.0	61.4	93.2	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	54.0
58.0	58.9	90.8	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	58.0
62.0	56.2	88.1	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	62.0
66.0	53.5	85.1	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	66.0
70.0	50.6	81.8	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	70.0
74.0	47.6	78.1	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	74.0
78.0	44.5	74.0	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	78.0
82.0	41.1	69.5	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	82.0
86.0	37.6	64.3	6 700 *	6 700 *	6 700 *	6 700 *	6 700 *	6 700 *	86.0
90.0	33.6	58.3	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	90.0
94.0	29.2	51.4	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	94.0
98.0	24.0	42.8	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	98.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

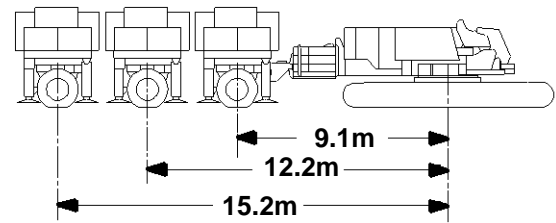

73.2m (240 Ft.) Boom

36.6m (120 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.4	111.4	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	15 900 *	22.9
24.0	79.8	111.2	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	24.0
26.0	78.7	110.7	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	26.0
28.0	77.7	110.3	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	28.0
30.0	76.6	109.7	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	30.0
32.0	75.5	109.2	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	32.0
34.0	74.4	108.6	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	34.0
36.0	73.4	108.0	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	36.0
38.0	72.3	107.3	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	38.0
40.0	71.2	106.6	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	12 500 *	40.0
42.0	70.0	105.8	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	12 200 *	42.0
44.0	68.9	105.0	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	44.0
46.0	67.8	104.1	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	46.0
50.0	65.5	102.3	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	50.0
54.0	63.2	100.2	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	54.0
58.0	60.8	97.9	9 700 *	9 700 *	9 700 *	9 700 *	9 700 *	9 700 *	58.0
62.0	58.3	95.4	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	62.0
66.0	55.8	92.7	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	66.0
70.0	53.2	89.7	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	70.0
74.0	50.5	86.4	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	74.0
78.0	47.7	82.7	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	78.0
82.0	44.8	78.7	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	82.0
86.0	41.6	74.2	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	86.0
90.0	38.3	69.1	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	90.0
94.0	34.7	63.4	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	94.0
98.0	30.6	56.8	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	98.0
102.0	26.0	48.9	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	102.0
106.0	20.4	38.8	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	106.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

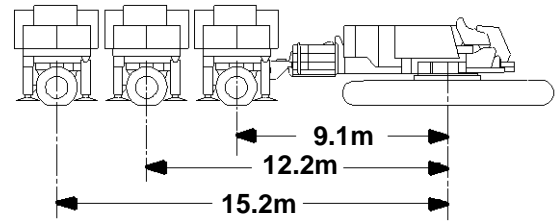

79.2m (260 Ft.) Boom
36.6m (120 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
22.9	80.9	117.6	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	16 600 *	22.9
24.0	80.3	117.4	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	16 500 *	24.0
26.0	79.3	117.0	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	16 100 *	26.0
28.0	78.3	116.5	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	28.0
30.0	77.3	116.0	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	15 300 *	30.0
32.0	76.3	115.5	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	32.0
34.0	75.3	115.0	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	34.0
36.0	74.3	114.4	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	14 200 *	36.0
38.0	73.2	113.7	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	38.0
40.0	72.2	113.0	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	40.0
42.0	71.1	112.3	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	42.0
44.0	70.1	111.6	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	44.0
46.0	69.0	110.7	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	12 400 *	46.0
50.0	66.9	109.0	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	50.0
54.0	64.7	107.1	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	54.0
58.0	62.5	105.0	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	58.0
62.0	60.2	102.7	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	62.0
66.0	57.9	100.1	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	66.0
70.0	55.5	97.3	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	70.0
74.0	53.0	94.3	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	74.0
78.0	50.4	91.0	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	78.0
82.0	47.8	87.3	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	82.0
86.0	45.0	83.3	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	86.0
90.0	42.0	78.9	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	90.0
94.0	38.9	73.9	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	94.0
98.0	35.6	68.4	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	98.0
102.0	31.9	62.1	4 200 *	4 200 *	4 200 *	4 200 *	4 200 *	4 200 *	102.0
106.0	27.7	54.6	2 800 *	2 800 *	2 800 *	2 800 *	2 800 *	2 800 *	106.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

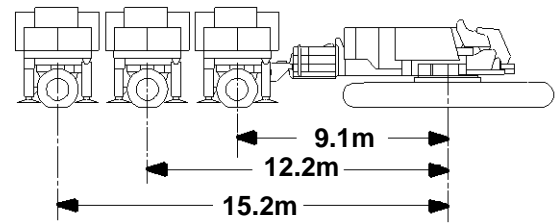

85.3m (280 Ft.) Boom

36.6m (120 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	80.5	123.1	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	25.9
26.0	80.5	123.1	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	15 800 *	26.0
28.0	79.5	122.7	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	28.0
30.0	78.6	122.2	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	15 000 *	30.0
32.0	77.6	121.7	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	14 700 *	32.0
34.0	76.6	121.2	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	34.0
36.0	75.7	120.6	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	36.0
38.0	74.7	120.0	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	13 600 *	38.0
40.0	73.7	119.4	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	13 300 *	40.0
42.0	72.7	118.7	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	13 000 *	42.0
44.0	71.7	118.0	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	44.0
46.0	70.7	117.2	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	46.0
50.0	68.7	115.6	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	50.0
54.0	66.6	113.8	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	54.0
58.0	64.5	111.8	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	58.0
62.0	62.4	109.6	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	62.0
66.0	60.2	107.3	9 700 *	9 700 *	9 700 *	9 700 *	9 700 *	9 700 *	66.0
70.0	58.0	104.7	9 200 *	9 200 *	9 200 *	9 200 *	9 200 *	9 200 *	70.0
74.0	55.7	101.9	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	74.0
78.0	53.4	98.8	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	78.0
82.0	50.9	95.5	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	82.0
86.0	48.4	91.8	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	86.0
90.0	45.8	87.8	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	90.0
94.0	43.0	83.5	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	94.0
98.0	40.0	78.6	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	98.0
102.0	36.9	73.2	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	102.0
106.0	33.5	67.1	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	106.0
110.0	29.7	60.1	5 900 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	110.0
114.0	25.3	51.7	5 100 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	114.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

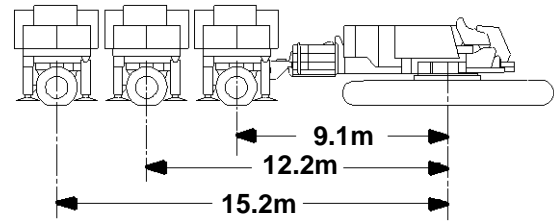

91.4m (300 Ft.) Boom

36.6m (120 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
25.9	81.0	129.3	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	25.9
26.0	80.9	129.3	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	15 700 *	26.0
28.0	80.0	128.9	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	15 400 *	28.0
30.0	79.1	128.5	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	15 100 *	30.0
32.0	78.2	128.0	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	14 800 *	32.0
34.0	77.3	127.5	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	14 400 *	34.0
36.0	76.4	127.0	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	14 100 *	36.0
38.0	75.4	126.4	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	13 800 *	38.0
40.0	74.5	125.8	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	13 500 *	40.0
42.0	73.6	125.1	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	13 200 *	42.0
44.0	72.6	124.5	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	12 900 *	44.0
46.0	71.7	123.7	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	12 600 *	46.0
50.0	69.8	122.2	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	12 000 *	50.0
54.0	67.8	120.5	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	54.0
58.0	65.9	118.6	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	58.0
62.0	63.8	116.6	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	62.0
66.0	61.8	114.4	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	66.0
70.0	59.7	111.9	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	9 500 *	70.0
74.0	57.6	109.3	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	74.0
78.0	55.4	106.5	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	78.0
82.0	53.2	103.4	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	82.0
86.0	50.8	100.1	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	86.0
90.0	48.4	96.4	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	90.0
94.0	45.9	92.5	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	94.0
98.0	43.3	88.1	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	98.0
102.0	40.5	83.4	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	102.0
106.0	37.6	78.1	6 500 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	106.0
110.0	34.4	72.2	5 600 *	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	110.0
114.0	30.9	65.5	4 600 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	114.0
118.0	27.0	57.6	3 600 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	118.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

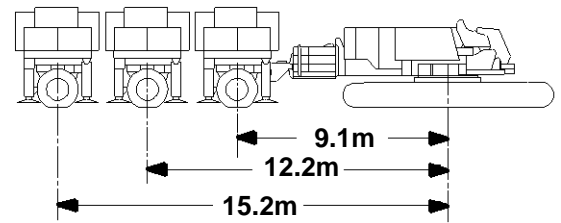

97.5m (320 Ft.) Boom

36.6m (120 Ft.) Jib, 5 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
27.4	80.7	135.3	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	15 600 *	27.4
28.0	80.5	135.1	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	15 500 *	28.0
30.0	79.6	134.7	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	15 200 *	30.0
32.0	78.7	134.3	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	14 900 *	32.0
34.0	77.9	133.8	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	14 600 *	34.0
36.0	77.0	133.3	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	14 300 *	36.0
38.0	76.1	132.7	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	14 000 *	38.0
40.0	75.2	132.2	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	13 700 *	40.0
42.0	74.3	131.6	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	13 400 *	42.0
44.0	73.4	130.9	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	13 100 *	44.0
46.0	72.5	130.2	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	12 800 *	46.0
50.0	70.7	128.8	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	12 300 *	50.0
54.0	68.9	127.1	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	54.0
58.0	67.0	125.4	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	58.0
62.0	65.1	123.4	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	62.0
66.0	63.2	121.3	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	66.0
70.0	61.3	119.1	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	70.0
74.0	59.3	116.6	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	74.0
78.0	57.2	114.0	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	78.0
82.0	55.1	111.1	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	82.0
86.0	53.0	108.0	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	86.0
90.0	50.8	104.7	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	90.0
94.0	48.5	101.0	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	94.0
98.0	46.1	97.1	7 000 *	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	98.0
102.0	43.6	92.8	5 800 *	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	102.0
106.0	40.9	88.1	4 700 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	106.0
110.0	38.2	83.0	3 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	110.0
114.0	35.2	77.2	2 600 *	6 400 *	5 700 *	6 400 *	6 400 *	6 400 *	114.0
118.0	32.0	70.8		6 200 *	4 600 *	6 200 *	6 200 *	6 200 *	118.0
122.0	28.4	63.4		5 000 *	3 600 *	6 000 *	6 000 *	6 000 *	122.0
126.0	24.3	54.6		3 600 *	2 700 *	5 800 *	5 400 *	5 800 *	126.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
 ANSI B30.5
 Requirements

MAX-ER 2000 On 2250

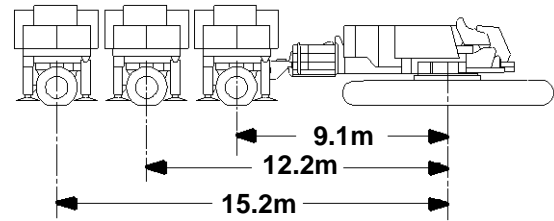

103.6m (340 Ft.) Boom
36.6m (120 Ft.) Jib, 5 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
29.0	80.5	141.2	15 400 *	15 400 *	15 400 *	15 400 *	29.0
30.0	80.1	141.0	15 200 *	15 200 *	15 200 *	15 200 *	30.0
32.0	79.2	140.5	15 000 *	15 000 *	15 000 *	15 000 *	32.0
34.0	78.4	140.1	14 700 *	14 700 *	14 700 *	14 700 *	34.0
36.0	77.6	139.6	14 400 *	14 400 *	14 400 *	14 400 *	36.0
38.0	76.7	139.1	14 100 *	14 100 *	14 100 *	14 100 *	38.0
40.0	75.9	138.5	13 800 *	13 800 *	13 800 *	13 800 *	40.0
42.0	75.0	137.9	13 500 *	13 500 *	13 500 *	13 500 *	42.0
44.0	74.2	137.3	13 300 *	13 300 *	13 300 *	13 300 *	44.0
46.0	73.3	136.7	13 000 *	13 000 *	13 000 *	13 000 *	46.0
50.0	71.6	135.3	12 500 *	12 500 *	12 500 *	12 500 *	50.0
54.0	69.9	133.7	12 000 *	12 000 *	12 000 *	12 000 *	54.0
58.0	68.1	132.0	11 500 *	11 500 *	11 500 *	11 500 *	58.0
62.0	66.3	130.2	11 000 *	11 000 *	11 000 *	11 000 *	62.0
66.0	64.5	128.2	10 600 *	10 600 *	10 600 *	10 600 *	66.0
70.0	62.6	126.1	10 100 *	10 100 *	10 100 *	10 100 *	70.0
74.0	60.8	123.8	9 700 *	9 700 *	9 700 *	9 700 *	74.0
78.0	58.8	121.3	9 300 *	9 300 *	9 300 *	9 300 *	78.0
82.0	56.9	118.6	9 000 *	9 000 *	9 000 *	9 000 *	82.0
86.0	54.9	115.7	8 600 *	8 600 *	8 600 *	8 600 *	86.0
90.0	52.8	112.6	8 300 *	8 300 *	8 300 *	8 300 *	90.0
94.0	50.7	109.3	8 000 *	8 000 *	8 000 *	8 000 *	94.0
98.0	48.5	105.6	7 700 *	7 700 *	7 700 *	7 700 *	98.0
102.0	46.2	101.7	7 400 *	7 400 *	7 400 *	7 400 *	102.0
106.0	43.8	97.5	7 100 *	7 100 *	7 100 *	7 100 *	106.0
110.0	41.3	92.9	6 200 *	6 900 *	6 900 *	6 900 *	110.0
114.0	38.7	87.8	5 100 *	6 600 *	6 600 *	6 600 *	114.0
118.0	35.9	82.2	4 100 *	6 400 *	6 400 *	6 400 *	118.0
122.0	32.9	76.0	3 100 *	6 200 *	5 900 *	6 200 *	122.0
126.0	29.6	68.9	2 200 *	6 000 *	4 900 *	6 000 *	126.0
130.0	25.9	60.7		5 800 *	4 000 *	5 800 *	130.0
134.0	21.5	50.8		5 700 *	3 000 *	5 700 *	134.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

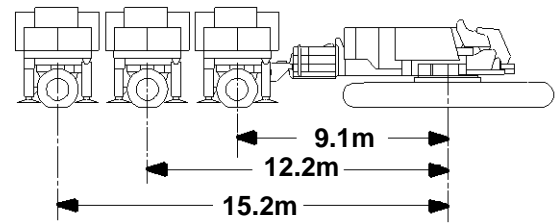

**109.7m (360 Ft.) Boom
 36.6m (120 Ft.) Jib, 5 Degree Offset**

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
29.0	80.9	147.4	15 200 *
30.0	80.5	147.2	15 100 *
32.0	79.7	146.8	14 900 *
34.0	78.9	146.3	14 600 *
36.0	78.1	145.9	14 400 *
38.0	77.3	145.4	14 100 *
40.0	76.5	144.8	13 900 *
42.0	75.7	144.3	13 600 *
44.0	74.9	143.7	13 400 *
46.0	74.0	143.1	13 100 *
50.0	72.4	141.7	12 600 *
54.0	70.7	140.3	12 100 *
58.0	69.1	138.7	11 600 *
62.0	67.4	136.9	11 200 *
66.0	65.6	135.1	10 700 *
70.0	63.9	133.0	10 300 *
74.0	62.1	130.8	9 900 *
78.0	60.3	128.5	9 500 *
82.0	58.4	126.0	9 200 *
86.0	56.6	123.3	8 800 *
90.0	54.6	120.3	8 500 *
94.0	52.6	117.2	8 200 *
98.0	50.6	113.9	7 900 *
102.0	48.5	110.2	7 600 *
106.0	46.3	106.3	7 400 *
110.0	44.1	102.1	7 100 *
114.0	41.7	97.6	6 900 *
118.0	39.2	92.6	6 600 *
122.0	36.6	87.1	6 400 *
126.0	33.7	81.1	6 200 *
130.0	30.7	74.3	6 100 *
134.0	27.3	66.6	5 900 *
138.0	23.4	57.4	5 800 *

**115.8m (380 Ft.) Boom
 36.6m (120 Ft.) Jib, 5 Degree Offset**

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
30.5	80.7	153.3	15 000 *
32.0	80.1	153.0	14 800 *
34.0	79.3	152.6	14 600 *
36.0	78.6	152.1	14 400 *
38.0	77.8	151.6	14 100 *
40.0	77.0	151.1	13 900 *
42.0	76.3	150.6	13 700 *
44.0	75.5	150.0	13 400 *
46.0	74.7	149.4	13 200 *
50.0	73.1	148.2	12 700 *
54.0	71.5	146.8	12 300 *
58.0	69.9	145.3	11 800 *
62.0	68.3	143.6	11 300 *
66.0	66.7	141.8	10 900 *
70.0	65.0	139.9	10 500 *
74.0	63.3	137.8	10 200 *
78.0	61.6	135.6	9 800 *
82.0	59.9	133.2	9 400 *
86.0	58.1	130.6	9 100 *
90.0	56.3	127.9	8 700 *
94.0	54.4	125.0	8 400 *
98.0	52.5	121.8	8 200 *
102.0	50.5	118.4	7 900 *
106.0	48.5	114.8	7 600 *
110.0	46.4	111.0	7 400 *
114.0	44.3	106.8	7 100 *
118.0	42.0	102.3	6 900 *
122.0	39.6	97.4	6 700 *
126.0	37.1	92.0	6 500 *
130.0	34.5	86.1	6 300 *
134.0	31.6	79.6	6 100 *
138.0	28.5	72.2	5 900 *
142.0	24.9	63.7	5 200 *




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

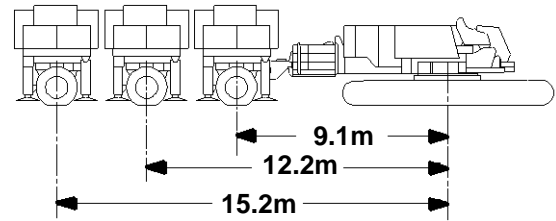

61.0m (200 Ft.) Boom

36.6m (120 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
27.4	81.0	97.1	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	11 900 *	27.4
28.0	80.6	96.9	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	28.0
30.0	79.4	96.3	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	30.0
32.0	78.2	95.7	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	11 100 *	32.0
34.0	76.9	95.0	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	34.0
36.0	75.7	94.3	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	36.0
38.0	74.4	93.6	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	38.0
40.0	73.1	92.7	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	40.0
42.0	71.8	91.9	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	42.0
44.0	70.5	90.9	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	44.0
46.0	69.2	89.9	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	46.0
50.0	66.6	87.8	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	50.0
54.0	63.8	85.4	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	54.0
58.0	61.0	82.7	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	58.0
62.0	58.1	79.7	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	62.0
66.0	55.0	76.4	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	66.0
70.0	51.8	72.7	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	70.0
74.0	48.4	68.6	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	74.0
78.0	44.8	63.9	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	78.0
82.0	40.8	58.5	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	82.0
86.0	36.5	52.2	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	86.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

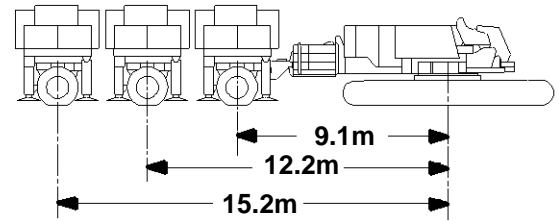

67.1m (220 Ft.) Boom

36.6m (120 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
29.0	80.6	103.0	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	29.0
30.0	80.0	102.7	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	30.0
32.0	78.9	102.1	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	32.0
34.0	77.7	101.4	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	34.0
36.0	76.6	100.8	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	36.0
38.0	75.4	100.1	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	38.0
40.0	74.2	99.3	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	40.0
42.0	73.0	98.5	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	42.0
44.0	71.8	97.6	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	44.0
46.0	70.6	96.7	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	46.0
50.0	68.1	94.7	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	50.0
54.0	65.6	92.5	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	54.0
58.0	63.0	90.0	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	58.0
62.0	60.3	87.3	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	62.0
66.0	57.5	84.3	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	66.0
70.0	54.6	81.0	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	70.0
74.0	51.6	77.3	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	74.0
78.0	48.4	73.2	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	78.0
82.0	45.1	68.6	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	82.0
86.0	41.4	63.4	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	86.0
90.0	37.4	57.4	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	90.0
94.0	32.9	50.2	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	94.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
 ANSI B30.5
 Requirements

MAX-ER 2000 On 2250

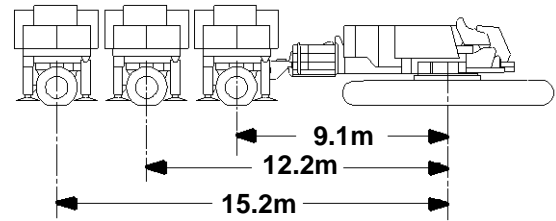

73.2m (240 Ft.) Boom

36.6m (120 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
30.5	80.3	108.8	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	11 700 *	30.5
32.0	79.5	108.4	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	32.0
34.0	78.4	107.8	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	34.0
36.0	77.3	107.2	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	36.0
38.0	76.2	106.5	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	38.0
40.0	75.1	105.8	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	40.0
42.0	74.0	105.0	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	42.0
44.0	72.9	104.2	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	44.0
46.0	71.7	103.4	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	46.0
50.0	69.4	101.5	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	9 100 *	50.0
54.0	67.1	99.4	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	54.0
58.0	64.7	97.2	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	58.0
62.0	62.2	94.7	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	62.0
66.0	59.7	91.9	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	66.0
70.0	57.0	88.9	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	70.0
74.0	54.3	85.5	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	74.0
78.0	51.5	81.9	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	78.0
82.0	48.5	77.8	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	82.0
86.0	45.3	73.3	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	86.0
90.0	41.9	68.2	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	90.0
94.0	38.2	62.4	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	94.0
98.0	34.1	55.7	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	98.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

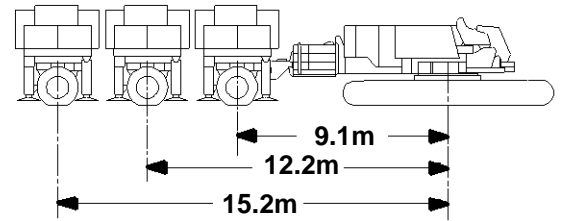

79.2m (260 Ft.) Boom
36.6m (120 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
30.5	80.9	115.1	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	11 800 *	30.5
32.0	80.1	114.7	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	32.0
34.0	79.1	114.1	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	34.0
36.0	78.0	113.5	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	36.0
38.0	77.0	112.9	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	38.0
40.0	75.9	112.2	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	40.0
42.0	74.9	111.5	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	42.0
44.0	73.8	110.8	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	44.0
46.0	72.8	109.9	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	46.0
50.0	70.6	108.2	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	9 300 *	50.0
54.0	68.4	106.3	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	54.0
58.0	66.2	104.2	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	58.0
62.0	63.9	101.8	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	62.0
66.0	61.5	99.3	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	66.0
70.0	59.1	96.5	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	70.0
74.0	56.6	93.5	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	74.0
78.0	54.0	90.1	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	78.0
82.0	51.3	86.4	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	82.0
86.0	48.5	82.4	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	86.0
90.0	45.5	77.9	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	90.0
94.0	42.4	73.0	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	94.0
98.0	38.9	67.4	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	98.0
102.0	35.2	60.9	4 300 *	4 300 *	4 300 *	4 300 *	4 300 *	4 300 *	102.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

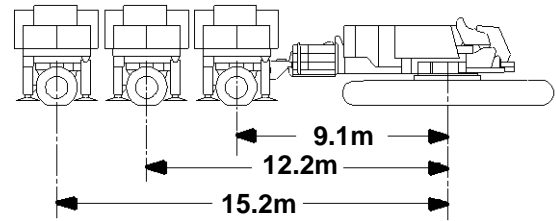

85.3m (280 Ft.) Boom

36.6m (120 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
32.0	80.8	120.9	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	32.0
34.0	79.9	120.3	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	34.0
36.0	78.9	119.8	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	36.0
38.0	77.9	119.2	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	38.0
40.0	76.9	118.5	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	40.0
42.0	75.9	117.9	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	10 300 *	42.0
44.0	74.9	117.1	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	10 100 *	44.0
46.0	73.9	116.4	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	9 900 *	46.0
50.0	71.9	114.7	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	50.0
54.0	69.8	112.9	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	54.0
58.0	67.7	110.9	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	58.0
62.0	65.5	108.8	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	62.0
66.0	63.3	106.4	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	66.0
70.0	61.1	103.8	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	70.0
74.0	58.8	101.0	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	74.0
78.0	56.4	97.9	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	78.0
82.0	53.9	94.6	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	82.0
86.0	51.4	90.9	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	86.0
90.0	48.7	86.9	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	90.0
94.0	45.9	82.5	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	94.0
98.0	42.9	77.6	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	98.0
102.0	39.7	72.1	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	102.0
106.0	36.3	65.9	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	106.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

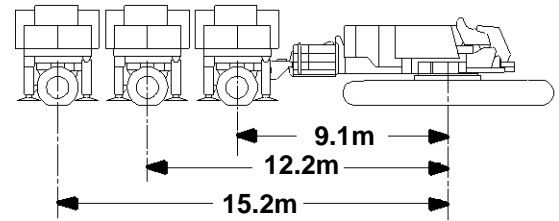

91.4m (300 Ft.) Boom
36.6m (120 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
33.5	80.6	126.8	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	33.5
34.0	80.4	126.6	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	11 400 *	34.0
36.0	79.4	126.1	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	11 200 *	36.0
38.0	78.5	125.5	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	10 900 *	38.0
40.0	77.5	124.9	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	10 700 *	40.0
42.0	76.6	124.3	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	10 500 *	42.0
44.0	75.7	123.6	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	44.0
46.0	74.7	122.9	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	10 000 *	46.0
50.0	72.8	121.3	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	9 600 *	50.0
54.0	70.8	119.6	9 200 *	9 200 *	9 200 *	9 200 *	9 200 *	9 200 *	54.0
58.0	68.8	117.7	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	58.0
62.0	66.8	115.7	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	62.0
66.0	64.8	113.5	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	66.0
70.0	62.7	111.1	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	70.0
74.0	60.5	108.4	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	74.0
78.0	58.3	105.6	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	78.0
82.0	56.0	102.5	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	82.0
86.0	53.7	99.1	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	86.0
90.0	51.3	95.5	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	90.0
94.0	48.7	91.5	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	94.0
98.0	46.1	87.1	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	98.0
102.0	43.3	82.3	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	102.0
106.0	40.3	77.0	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	106.0
110.0	37.0	71.0	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	110.0
114.0	33.5	64.2	5 100 *	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	114.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

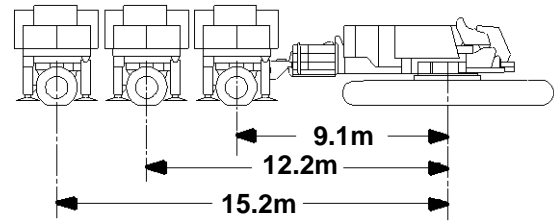

97.5m (320 Ft.) Boom

36.6m (120 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
33.5	81.0	133.0	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	11 600 *	33.5
34.0	80.8	132.9	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	11 500 *	34.0
36.0	79.9	132.4	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	11 300 *	36.0
38.0	79.0	131.8	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	11 000 *	38.0
40.0	78.1	131.3	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	10 800 *	40.0
42.0	77.2	130.7	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	10 600 *	42.0
44.0	76.3	130.0	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	10 400 *	44.0
46.0	75.4	129.3	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	10 200 *	46.0
50.0	73.6	127.9	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	9 800 *	50.0
54.0	71.8	126.2	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	9 400 *	54.0
58.0	69.9	124.5	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	9 000 *	58.0
62.0	68.0	122.5	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	62.0
66.0	66.0	120.4	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	66.0
70.0	64.1	118.2	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	70.0
74.0	62.1	115.7	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	74.0
78.0	60.0	113.0	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	78.0
82.0	57.9	110.2	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	82.0
86.0	55.7	107.1	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	86.0
90.0	53.5	103.7	6 700 *	6 700 *	6 700 *	6 700 *	6 700 *	6 700 *	90.0
94.0	51.2	100.0	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	94.0
98.0	48.7	96.1	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	98.0
102.0	46.2	91.8	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	102.0
106.0	43.6	87.0	5 600 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	106.0
110.0	40.7	81.8	4 400 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	110.0
114.0	37.7	76.0	3 300 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	114.0
118.0	34.4	69.5	2 200 *	5 600 *	5 200 *	5 600 *	5 600 *	5 600 *	118.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

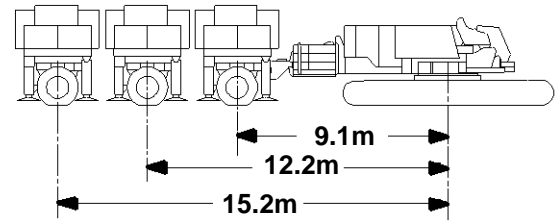

103.6m (340 Ft.) Boom
36.6m (120 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
35.1	80.8	138.9	11 500 *	11 500 *	11 500 *	11 500 *	35.1
36.0	80.4	138.7	11 400 *	11 400 *	11 400 *	11 400 *	36.0
38.0	79.5	138.1	11 100 *	11 100 *	11 100 *	11 100 *	38.0
40.0	78.7	137.6	10 900 *	10 900 *	10 900 *	10 900 *	40.0
42.0	77.8	137.0	10 700 *	10 700 *	10 700 *	10 700 *	42.0
44.0	77.0	136.4	10 500 *	10 500 *	10 500 *	10 500 *	44.0
46.0	76.1	135.7	10 300 *	10 300 *	10 300 *	10 300 *	46.0
50.0	74.4	134.4	9 900 *	9 900 *	9 900 *	9 900 *	50.0
54.0	72.6	132.8	9 600 *	9 600 *	9 600 *	9 600 *	54.0
58.0	70.8	131.1	9 200 *	9 200 *	9 200 *	9 200 *	58.0
62.0	69.0	129.3	8 800 *	8 800 *	8 800 *	8 800 *	62.0
66.0	67.2	127.3	8 500 *	8 500 *	8 500 *	8 500 *	66.0
70.0	65.3	125.2	8 300 *	8 300 *	8 300 *	8 300 *	70.0
74.0	63.4	122.9	8 000 *	8 000 *	8 000 *	8 000 *	74.0
78.0	61.5	120.4	7 700 *	7 700 *	7 700 *	7 700 *	78.0
82.0	59.5	117.7	7 400 *	7 400 *	7 400 *	7 400 *	82.0
86.0	57.5	114.8	7 200 *	7 200 *	7 200 *	7 200 *	86.0
90.0	55.4	111.6	6 900 *	6 900 *	6 900 *	6 900 *	90.0
94.0	53.3	108.3	6 700 *	6 700 *	6 700 *	6 700 *	94.0
98.0	51.1	104.6	6 500 *	6 500 *	6 500 *	6 500 *	98.0
102.0	48.8	100.7	6 300 *	6 300 *	6 300 *	6 300 *	102.0
106.0	46.4	96.4	6 200 *	6 200 *	6 200 *	6 200 *	106.0
110.0	43.8	91.7	6 000 *	6 000 *	6 000 *	6 000 *	110.0
114.0	41.2	86.6	5 800 *	5 900 *	5 900 *	5 900 *	114.0
118.0	38.3	81.0	4 800 *	5 700 *	5 700 *	5 700 *	118.0
122.0	35.3	74.7	3 700 *	5 600 *	5 600 *	5 600 *	122.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

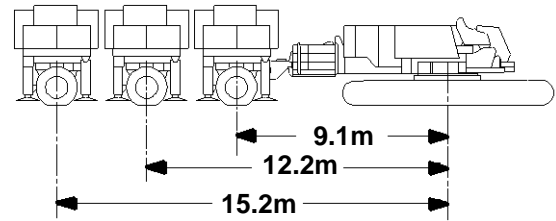

109.7m (360 Ft.) Boom 36.6m (120 Ft.) Jib, 15 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
36.6	80.5	144.8	11 300 *
38.0	80.0	144.4	11 200 *
40.0	79.2	143.9	11 000 *
42.0	78.3	143.3	10 800 *
44.0	77.5	142.8	10 600 *
46.0	76.7	142.1	10 400 *
50.0	75.0	140.8	10 000 *
54.0	73.4	139.3	9 700 *
58.0	71.7	137.7	9 300 *
62.0	70.0	136.0	9 000 *
66.0	68.2	134.1	8 700 *
70.0	66.5	132.1	8 400 *
74.0	64.7	129.9	8 100 *
78.0	62.9	127.5	7 800 *
82.0	61.0	125.0	7 600 *
86.0	59.1	122.3	7 300 *
90.0	57.1	119.4	7 100 *
94.0	55.1	116.2	6 900 *
98.0	53.1	112.8	6 700 *
102.0	51.0	109.2	6 500 *
106.0	48.8	105.3	6 300 *
110.0	46.5	101.0	6 200 *
114.0	44.1	96.4	6 000 *
118.0	41.6	91.4	5 900 *
122.0	38.9	85.9	5 700 *
126.0	36.0	79.8	5 600 *
130.0	32.9	72.9	5 500 *

115.8m (380 Ft.) Boom 36.6m (120 Ft.) Jib, 15 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
36.6	80.9	151.0	11 400 *
38.0	80.4	150.7	11 200 *
40.0	79.6	150.2	11 000 *
42.0	78.8	149.7	10 900 *
44.0	78.0	149.1	10 700 *
46.0	77.3	148.5	10 500 *
50.0	75.7	147.2	10 100 *
54.0	74.1	145.8	9 800 *
58.0	72.5	144.3	9 500 *
62.0	70.8	142.7	9 100 *
66.0	69.2	140.9	8 800 *
70.0	67.5	138.9	8 500 *
74.0	65.8	136.9	8 300 *
78.0	64.1	134.6	8 000 *
82.0	62.3	132.2	7 800 *
86.0	60.5	129.7	7 500 *
90.0	58.7	126.9	7 300 *
94.0	56.8	124.0	7 100 *
98.0	54.9	120.8	6 900 *
102.0	52.9	117.4	6 700 *
106.0	50.9	113.8	6 500 *
110.0	48.8	109.9	6 300 *
114.0	46.6	105.7	6 200 *
118.0	44.3	101.1	6 000 *
122.0	41.9	96.2	5 900 *
126.0	39.4	90.8	5 800 *
130.0	36.7	84.8	5 700 *
134.0	33.7	78.2	5 500 *

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

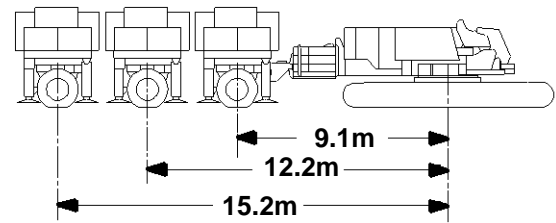

61.0m (200 Ft.) Boom
36.6m (120 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
35.1	80.7	92.5	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	35.1
36.0	80.1	92.1	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	36.0
38.0	78.8	91.3	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	38.0
40.0	77.5	90.5	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	40.0
42.0	76.2	89.6	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	42.0
44.0	74.8	88.6	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	44.0
46.0	73.5	87.6	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	46.0
50.0	70.8	85.4	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	50.0
54.0	67.9	83.0	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	54.0
58.0	65.0	80.2	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	58.0
62.0	62.0	77.1	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	62.0
66.0	58.8	73.7	5 200 *	5 200 *	5 200 *	5 200 *	5 200 *	5 200 *	66.0
70.0	55.5	69.8	5 000 *	5 000 *	5 000 *	5 000 *	5 000 *	5 000 *	70.0
74.0	51.9	65.5	4 800 *	4 800 *	4 800 *	4 800 *	4 800 *	4 800 *	74.0
78.0	48.1	60.6	4 600 *	4 600 *	4 600 *	4 600 *	4 600 *	4 600 *	78.0

67.1m (220 Ft.) Boom
36.6m (120 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
36.6	80.4	98.3	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	36.6
38.0	79.5	97.8	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	38.0
40.0	78.3	97.0	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	40.0
42.0	77.1	96.2	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	7 400 *	42.0
44.0	75.8	95.3	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	44.0
46.0	74.6	94.3	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	46.0
50.0	72.1	92.3	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	50.0
54.0	69.4	90.0	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	54.0
58.0	66.8	87.5	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	58.0
62.0	64.0	84.7	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	62.0
66.0	61.2	81.6	5 400 *	5 400 *	5 400 *	5 400 *	5 400 *	5 400 *	66.0
70.0	58.2	78.2	5 200 *	5 200 *	5 200 *	5 200 *	5 200 *	5 200 *	70.0
74.0	55.0	74.3	4 900 *	4 900 *	4 900 *	4 900 *	4 900 *	4 900 *	74.0
78.0	51.7	70.0	4 700 *	4 700 *	4 700 *	4 700 *	4 700 *	4 700 *	78.0
82.0	48.2	65.2	4 600 *	4 600 *	4 600 *	4 600 *	4 600 *	4 600 *	82.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

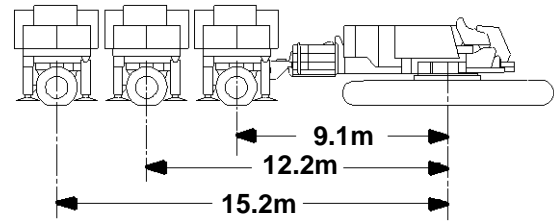

73.2m (240 Ft.) Boom

36.6m (120 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
36.6	81.0	104.7	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	36.6
38.0	80.1	104.2	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	38.0
40.0	79.0	103.4	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	40.0
42.0	77.9	102.7	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	42.0
44.0	76.7	101.8	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	44.0
46.0	75.5	101.0	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	46.0
50.0	73.2	99.1	6 700 *	6 700 *	6 700 *	6 700 *	6 700 *	6 700 *	50.0
54.0	70.8	96.9	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	54.0
58.0	68.3	94.6	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	58.0
62.0	65.8	92.0	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	62.0
66.0	63.1	89.2	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	66.0
70.0	60.4	86.1	5 300 *	5 300 *	5 300 *	5 300 *	5 300 *	5 300 *	70.0
74.0	57.6	82.6	5 100 *	5 100 *	5 100 *	5 100 *	5 100 *	5 100 *	74.0
78.0	54.7	78.8	4 900 *	4 900 *	4 900 *	4 900 *	4 900 *	4 900 *	78.0
82.0	51.5	74.6	4 700 *	4 700 *	4 700 *	4 700 *	4 700 *	4 700 *	82.0
86.0	48.2	69.8	4 600 *	4 600 *	4 600 *	4 600 *	4 600 *	4 600 *	86.0

79.2m (260 Ft.) Boom

36.6m (120 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
38.1	80.7	110.5	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	38.1
40.0	79.6	109.9	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	40.0
42.0	78.6	109.1	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	42.0
44.0	77.5	108.3	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	44.0
46.0	76.4	107.5	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	46.0
50.0	74.2	105.7	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	50.0
54.0	71.9	103.8	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	54.0
58.0	69.6	101.6	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	58.0
62.0	67.3	99.2	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	62.0
66.0	64.8	96.6	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	66.0
70.0	62.4	93.7	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	70.0
74.0	59.8	90.6	5 300 *	5 300 *	5 300 *	5 300 *	5 300 *	5 300 *	74.0
78.0	57.1	87.1	5 100 *	5 100 *	5 100 *	5 100 *	5 100 *	5 100 *	78.0
82.0	54.3	83.3	4 900 *	4 900 *	4 900 *	4 900 *	4 900 *	4 900 *	82.0
86.0	51.4	79.1	4 700 *	4 700 *	4 700 *	4 700 *	4 700 *	4 700 *	86.0
90.0	48.3	74.4	4 100 *	4 100 *	4 100 *	4 100 *	4 100 *	4 100 *	90.0
94.0	44.9	69.2	3 000 *	3 000 *	3 000 *	3 000 *	3 000 *	3 000 *	94.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

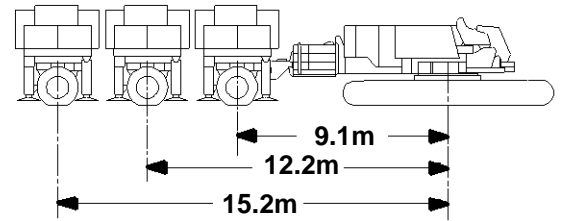

85.3m (280 Ft.) Boom
36.6m (120 Ft.) Jib, 30 Degree Offset

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
38.1	81.0	117.0	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	8 900 *	38.1
40.0	80.0	116.4	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	40.0
42.0	79.0	115.7	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	42.0
44.0	78.0	115.0	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	44.0
46.0	77.0	114.2	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	8 200 *	46.0
50.0	74.9	112.5	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	7 900 *	50.0
54.0	72.8	110.7	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	54.0
58.0	70.6	108.6	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	58.0
62.0	68.4	106.4	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	62.0
66.0	66.2	104.0	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	66.0
70.0	63.9	101.3	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	70.0
74.0	61.5	98.4	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	74.0
78.0	59.1	95.3	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	78.0
82.0	56.5	91.8	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	82.0
86.0	53.9	88.0	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	86.0
90.0	51.1	83.9	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	90.0
94.0	48.2	79.3	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	94.0
98.0	45.1	74.2	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	98.0




Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

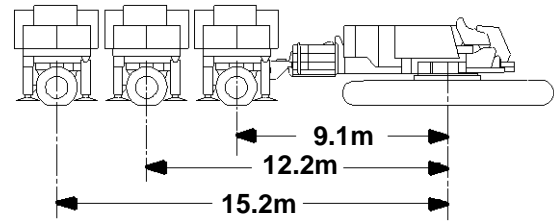

91.4m (300 Ft.) Boom

36.6m (120 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
39.6	80.7	122.9	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	39.6
40.0	80.5	122.7	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	8 800 *	40.0
42.0	79.6	122.1	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	8 600 *	42.0
44.0	78.6	121.4	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	44.0
46.0	77.6	120.7	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	8 300 *	46.0
50.0	75.7	119.1	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	8 000 *	50.0
54.0	73.7	117.3	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	7 700 *	54.0
58.0	71.6	115.4	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	7 500 *	58.0
62.0	69.6	113.3	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	7 200 *	62.0
66.0	67.5	111.1	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	7 000 *	66.0
70.0	65.3	108.6	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	6 800 *	70.0
74.0	63.1	105.9	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	6 600 *	74.0
78.0	60.9	103.0	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	6 400 *	78.0
82.0	58.5	99.8	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	82.0
86.0	56.1	96.3	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	6 100 *	86.0
90.0	53.6	92.6	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	90.0
94.0	51.0	88.4	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	5 800 *	94.0
98.0	48.2	83.9	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	98.0
102.0	45.3	78.9	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	5 600 *	102.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

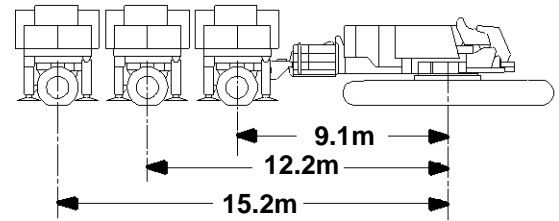

97.5m (320 Ft.) Boom
36.6m (120 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	9.1m Position		12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
41.1	80.5	128.7	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	41.1
42.0	80.1	128.4	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	8 700 *	42.0
44.0	79.2	127.8	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	8 500 *	44.0
46.0	78.2	127.1	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	8 400 *	46.0
50.0	76.4	125.6	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	8 100 *	50.0
54.0	74.5	123.9	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	7 800 *	54.0
58.0	72.6	122.1	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	7 600 *	58.0
62.0	70.6	120.2	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	7 300 *	62.0
66.0	68.7	118.0	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	7 100 *	66.0
70.0	66.6	115.7	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	6 900 *	70.0
74.0	64.6	113.2	6 700 *	6 700 *	6 700 *	6 700 *	6 700 *	6 700 *	74.0
78.0	62.5	110.5	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	6 500 *	78.0
82.0	60.3	107.5	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	6 300 *	82.0
86.0	58.1	104.3	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	6 200 *	86.0
90.0	55.8	100.9	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	6 000 *	90.0
94.0	53.4	97.1	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	5 900 *	94.0
98.0	50.9	93.0	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	98.0
102.0	48.3	88.5	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	5 700 *	102.0
106.0	45.5	83.6	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	5 500 *	106.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

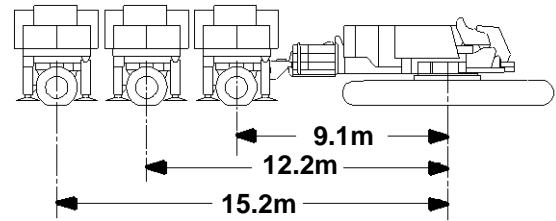

103.6m (340 Ft.) Boom
36.6m (120 Ft.) Jib, 30 Degree Offset


Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	12.2m Position		15.2m Position		Jib Oper. Rad. Meters
			108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	108 860 kg Wheeled Counterweight Jib Capacity Kilograms	209 560 kg Wheeled Counterweight Jib Capacity Kilograms	
41.1	80.9	135.0	8 800 *	8 800 *	8 800 *	8 800 *	41.1
42.0	80.5	134.8	8 700 *	8 700 *	8 700 *	8 700 *	42.0
44.0	79.7	134.1	8 600 *	8 600 *	8 600 *	8 600 *	44.0
46.0	78.8	133.5	8 500 *	8 500 *	8 500 *	8 500 *	46.0
50.0	77.0	132.1	8 200 *	8 200 *	8 200 *	8 200 *	50.0
54.0	75.2	130.5	7 900 *	7 900 *	7 900 *	7 900 *	54.0
58.0	73.4	128.8	7 700 *	7 700 *	7 700 *	7 700 *	58.0
62.0	71.6	126.9	7 400 *	7 400 *	7 400 *	7 400 *	62.0
66.0	69.7	124.9	7 200 *	7 200 *	7 200 *	7 200 *	66.0
70.0	67.8	122.7	7 000 *	7 000 *	7 000 *	7 000 *	70.0
74.0	65.9	120.3	6 800 *	6 800 *	6 800 *	6 800 *	74.0
78.0	63.9	117.8	6 600 *	6 600 *	6 600 *	6 600 *	78.0
82.0	61.9	115.0	6 500 *	6 500 *	6 500 *	6 500 *	82.0
86.0	59.8	112.1	6 300 *	6 300 *	6 300 *	6 300 *	86.0
90.0	57.7	108.9	6 200 *	6 200 *	6 200 *	6 200 *	90.0
94.0	55.5	105.4	6 000 *	6 000 *	6 000 *	6 000 *	94.0
98.0	53.2	101.6	5 900 *	5 900 *	5 900 *	5 900 *	98.0
102.0	50.8	97.6	5 800 *	5 800 *	5 800 *	5 800 *	102.0
106.0	48.3	93.1	5 700 *	5 700 *	5 700 *	5 700 *	106.0
110.0	45.7	88.3	5 600 *	5 600 *	5 600 *	5 600 *	110.0

Liftcrane Jib Capacities

Jib No. 132 With 6 096 mm Strut On
 Boom No. 79-44 with 39.6m Mast No. 44
 76 750 kg Crane Counterweight
 27 220 kg Carbody Counterweight
 108 860 kg and 209 560 kg Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

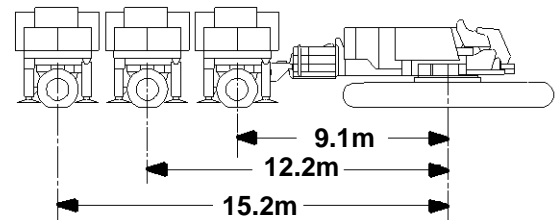

**109.7m (360 Ft.) Boom
 36.6m (120 Ft.) Jib, 30 Degree Offset**

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
42.7	80.7	140.9	8 700 *
44.0	80.1	140.5	8 600 *
46.0	79.3	139.8	8 500 *
50.0	77.6	138.5	8 300 *
54.0	75.9	137.0	8 000 *
58.0	74.2	135.4	7 700 *
62.0	72.4	133.6	7 600 *
66.0	70.7	131.7	7 300 *
70.0	68.9	129.6	7 100 *
74.0	67.0	127.4	6 900 *
78.0	65.2	125.0	6 700 *
82.0	63.3	122.4	6 600 *
86.0	61.3	119.6	6 400 *
90.0	59.3	116.6	6 300 *
94.0	57.3	113.4	6 100 *
98.0	55.2	109.9	6 000 *
102.0	53.0	106.2	5 800 *
106.0	50.7	102.1	5 800 *
110.0	48.4	97.8	5 700 *
114.0	45.9	93.0	5 600 *

**115.8m (380 Ft.) Boom
 36.6m (120 Ft.) Jib, 30 Degree Offset**

Jib Oper. Rad. Meters	Boom Ang. Deg.	Jib Point Elev. Meters	15.2m Position
			209 560 kg Wheeled Counterweight Jib Capacity Kilograms
44.2	80.5	146.7	8 700 *
46.0	79.7	146.2	8 600 *
50.0	78.1	144.9	8 300 *
54.0	76.5	143.5	8 100 *
58.0	74.9	141.9	7 800 *
62.0	73.2	140.2	7 600 *
66.0	71.5	138.4	7 400 *
70.0	69.8	136.5	7 200 *
74.0	68.1	134.3	7 000 *
78.0	66.3	132.1	6 800 *
82.0	64.5	129.6	6 700 *
86.0	62.7	127.0	6 500 *
90.0	60.8	124.2	6 300 *
94.0	58.9	121.2	6 200 *
98.0	56.9	117.9	6 100 *
102.0	54.9	114.5	5 900 *
106.0	52.8	110.7	5 900 *
110.0	50.6	106.7	5 700 *
114.0	48.4	102.4	5 700 *
118.0	46.0	97.7	5 600 *